# bitGen Studio

Instructions and shortcut keys

Version 2.642.0 · 01 November 2026

Local AI video, image, music and editing studio - ComfyUI, MiniMax H3, Wan, LTX, local LLMs

**Produced and Developed by Tim Paul**

**Programmer - Claude Opus 5.5**

Part 1 - Shortcut keys at a glance

Part 2 - Instructions (every docker, step by step)

Credits - at the end of Part 2

# Shortcut keys at a glance

Keys work when the docker they belong to has the pointer or the focus, and never while you type in a box. In the image editor every menu shows its keys too, and **Ctrl+K** finds any command by name.

## Anywhere in the app

| | |
|---|---|
| **Ctrl+K** | Find anything - a docker, a setting, a button, a style, the guide, a shortcut (the in the menu bar too). Over the timeline's layers Ctrl+K still splits, in the image editor it is its own palette |
| **Ctrl+Alt+D** | Show / hide ▣ Docker - an empty docker the others drop into (side by side or stacked; ⇱ on a docker's title floats it, then drag it in by its title) |
| **Ctrl+Alt+S** | Open Settings (works while typing too - also when a theme hid the ⚙ button) |
| **Ctrl+Alt+Shift+T** | Back to the bitGen Default theme (Dark, no element styles, UI size 100 %); Settings ▸ Themes ▸ ↶ The theme before undoes it. ?theme=default in the address does it before the page paints |
| **P** | Show / hide the prompt docker (not while typing in a box; over the image editor P is its Pen) |
| **S** | Show / hide Basic Settings - a floating docker (not while typing; over the image editor S is its Clone Stamp) |
| **L** | Show / hide LLM tokens - a floating docker (not while typing; over the image editor L is its Lasso, over the timeline the shuttle) |
| **1** | Show / hide the timeline Tools & Properties window |
| **2** | Show / hide the negative prompt docker (not while typing; while the multi-camera dialog is open 1 - 9 cut cameras) |
| **Space** | Pause / play the preview - the timeline canvas, the live preview or the preview video (not while typing in a box) |
| **Esc** | Leave a maximized docker |
| **Delete** | Delete the selected gallery picture (to the recycle bin) |
| **Enter** | In the prompt box: send it to the chat |
| **Shift+Enter** | In the prompt box: a new line |
| **Ctrl+Shift+Alt+E** | Edit theme mode with the dialogs too (an open Settings stays open to be styled) - again to leave |
| **Ctrl+S (in edit theme mode)** | Save the theme and leave edit theme mode |
| **Ctrl+Alt+Shift+B** | Bug report - a screenshot of the window first, then the docker (works while typing too); again hides it |

## Lightbox (a picture or clip opened full size)

| | |
|---|---|
| ← / → | Previous / next |
| + / − | Zoom in / out |
| 0 | Fit again |

## Timeline canvas (pointer over the canvas)

| | |
|---|---|
| V | Move |
| T | Text |
| H | Hand |
| Z | Zoom |
| M | Select (for Fill) |
| B | Mask brush |
| Shift+P | Path tool (path layers) |
| Shift+C | Camera tool: drag = pan / tilt, Alt+drag = roll, Shift+drag = height, wheel = dolly, Shift+wheel = zoom |
| Space (hold) | Pan with the hand |
| Space (tap) | Play / pause |
| Delete | Remove the selected clip |
| F2 | Rename the selected layer |
| ← / → | Nudge the selected clip (Shift: the bigger step - timeline ⚙) |
| Enter | Set the selected clip's start time |
| Delete / Backspace | Remove the selected keyframe (in its popup) |
| Esc / Enter | Path tool: back to the Move tool |
| Alt+click | Path tool: remove a point |
| Shift+Q | ✎ Freehand shape: draw a path (Alt = into the picked shape layer) |
| Shift+M | ✒ Mask Pen: click = a corner, drag = a curve, the first point / Enter = closed, Esc = done |
| Alt+drag (Blender view) | Zoom - drag up / forward = in, down / back = out (in the image editor's Blender scene tools too) |
| Z (Blender view) | Zoom to the picked object (nothing picked = the whole scene) |

## Timeline layers (pointer over the layers, the ruler or the menu bar)

| | |
|---|---|
| V | ▸ Select tool |
| B | ⇤ Ripple edit tool |
| N | ⇹ Roll edit tool |
| Y | ⇆ Slip tool |
| U | ↔ Slide tool |
| I | In - the ruler selection starts at the position marker |
| O | Out - the ruler selection ends at the position marker |
| Ctrl+K | Split at the position marker (the selected clip, else the highlighted layer's) |
| ↑ / ↓ | Previous / next edit point |
| Home / End | The start / end of the timeline |
| M | Add a marker at the position marker (on a marker: its name, colour, comment - double-click a flag does the same) |
| Shift+M / Alt+M | Next / previous marker |
| Ctrl+Shift+E | Export the frame at the position marker as a PNG (the canvas too) |
| Ctrl+Shift+M | A clip marker on the selected clip at the position marker (it stays on its frame) |
| J / K / L | Shuttle the preview: backwards / stop / forwards - J or L again plays at 2x, 4x, 8x (anywhere in the timeline docker, the canvas too) |
| K + J / K + L | Hold K: one frame back / on |

## 3D layers (a 3D layer selected)

| | |
|---|---|
| G | Move widget (again = off) |
| R | Rotate widget |
| S | Scale widget |

## House builder (the plan has the focus)

| | |
|---|---|
| **V** | ⬚ Select: drag a piece, its corner squares size it (Shift keeps its shape), its ↻ handle turns it; drag on an empty spot for a box, Shift+click adds one |
| **R / Shift+R** | Turn the picked piece / stairs / camera 15° - several picked: about their middle (with or ⇗ chosen: turn what you are about to place 90°) |
| **Arrows** | Nudge the picked thing(s) 5 cm - a picked camera: ← → turn it, ↑ ↓ tilt it |
| **Hold Shift / hold Alt** | A picked camera rises (3 m over the roof at most) / sinks (down to the ground floor) - the 3D view looks through it |
| **Delete / Backspace** | Remove the picked thing(s) (a wall takes its doors and windows) |
| **Ctrl+Z / Ctrl+Y (Ctrl+Shift+Z)** | Undo / redo |
| **Ctrl+S** | Save the house (+ its plan picture) |
| **Enter / double-click / Esc** | Finish a wall run or a polygon room (Esc also clears the selection) |
| **Shift (drawing walls)** | Any angle (otherwise walls snap straight within 8°) |
| **Alt (drawing)** | Don't snap to the wall corners |
| **Wheel / right-drag** | Zoom / pan the plan |
| **Drag in a camera's own 3D view** | Aim that camera |

## Image editor - tools

| | |
|---|---|
| **V** | Move |
| **M (Shift+M cycles)** | Rectangular Marquee · Elliptical Marquee |
| **L (Shift+L cycles)** | Lasso · Polygonal Lasso · Magnetic Lasso |
| **W (Shift+W cycles)** | Object Selection (Segment Anything) · Magic Wand · Quick Selection Brush |
| **C** | Crop |
| **I** | Eyedropper |
| **J (Shift+J cycles)** | Spot Healing Brush · Healing Brush · Patch · Content-Aware Move · Red Eye |
| **B (Shift+B cycles)** | Brush · Pencil · Mixer Brush |
| **S** | Clone Stamp |
| **Y** | History Brush |
| **E (Shift+E cycles)** | Eraser · Background Eraser · Magic Eraser |
| **G (Shift+G cycles)** | Gradient · Paint Bucket |
| **R (Shift+R cycles)** | Blur · Sharpen · Smudge |
| **O (Shift+O cycles)** | Dodge · Burn · Sponge |
| **P (Shift+P cycles)** | Pen · Freeform Pen · Curvature Pen · Add Anchor Point · Delete Anchor Point · Convert Point |
| **T (Shift+T cycles)** | Horizontal Type · Vertical Type · Type on a Path |
| **A (Shift+A cycles)** | Path Selection · Direct Selection |
| **U (Shift+U cycles)** | Shape (rectangle, ellipse, polygon, line) · Custom Shape |
| **H** | Hand |
| **Z** | Zoom |
| **F5 (F5 again cycles)** | Curve tools: Bézier · Freehand · 2-Point Line · Polyline · 3-Point Curve · B-Spline · Pen · Artistic Media |
| **F10** | Shape tool (nodes) |
| **F6 (F6 again cycles)** | Shapes: Rectangle · 3-Point Rectangle · Ellipse · 3-Point Ellipse · Polygon · Star · Complex Star · Spiral · Graph Paper · Common Shapes |
| **F8 (F8 again cycles)** | Parallel · Horizontal / Vertical · Angular Dimension · 3-Point Callout · Connector |

## Image editor - File menu

| | |
|---|---|
| Ctrl+N | New |
| Ctrl+O | Open |
| Alt+Ctrl+O | Place as Layer |
| Ctrl+S | Save to Images |
| Shift+Ctrl+S | Save as PSD |
| Alt+Ctrl+S | Save Project (.bgi) |
| Shift+Delete | Delete Layer |
| Ctrl+; | Guidelines |
| Alt+Ctrl+; | Lock Guidelines |
| Shift+Ctrl+; | Snap |
| Alt+Shift+Ctrl+W | Export As |
| Ctrl+W | Close |
| Alt+Ctrl+W | Close All |

## Image editor - Edit menu

| | |
|---|---|
| Ctrl+Z | Undo |
| Shift+Ctrl+Z | Redo |
| Ctrl+X | Cut |
| Ctrl+C | Copy |
| Shift+Ctrl+C | Copy Merged |
| Ctrl+V | Paste |
| Shift+Ctrl+V | Paste in Place |
| Shift+F5 | Fill |
| Ctrl+T | Free Transform |
| Alt+Shift+Ctrl+C | Content-Aware Scale |
| Ctrl+, | Preferences |

## Image editor - Image menu

| | |
|---|---|
| Shift+Ctrl+L | Auto Tone |
| Alt+Shift+Ctrl+L | Auto Contrast |
| Shift+Ctrl+B | Auto Color |
| Alt+Ctrl+I | Image Size |
| Alt+Ctrl+C | Canvas Size |

## Image editor - Layer menu

| | |
|---|---|
| Shift+Ctrl+N | Layer |
| Ctrl+J | Layer via Copy |
| Shift+Ctrl+J | Layer via Cut |
| Alt+Ctrl+G | Create / Release Clipping Mask |
| Ctrl+G | Group Layers |
| Shift+Ctrl+G | Ungroup Layers |
| Shift+Ctrl+] | Bring to Front |
| Ctrl+] | Bring Forward |
| Ctrl+[ | Send Backward |
| Shift+Ctrl+[ | Send to Back |
| Ctrl+/ | Lock All |
| Ctrl+E | Merge Down |
| Shift+Ctrl+E | Merge Visible |
| F12 | Outline Pen |
| Ctrl+Q | Convert to Curves |

## Image editor - Select menu

| | |
|---|---|
| Ctrl+A | All |
| Ctrl+D | Deselect |
| Shift+Ctrl+D | Reselect |
| Shift+Ctrl+I | Inverse |
| Shift+F6 | Feather |
| Q | Edit in Quick Mask Mode |
| Alt+Ctrl+R | Select and Mask |

## Image editor - Channels panel

| | |
|---|---|
| Ctrl+2 | RGB (all channels) |
| Ctrl+3 | Red channel alone |
| Ctrl+4 | Green channel alone |
| Ctrl+5 | Blue channel alone |
| Ctrl-click a channel | its lightness / the saved selection as a selection |

## Image editor - curve tools (F5) and Shape tool (F10)

| | |
|---|---|
| **click / drag** | Bézier: a cusp node / a smooth node (curve) |
| **C / S while dragging** | Bézier: the node cusp / smooth |
| **Ctrl** | curve tools: 15° steps |
| **click the first node** | close the curve |
| **double-click · Enter · Space** | done |
| **Esc** | drop the line being drawn |
| **C / S / Y** | Shape tool: cusp / smooth / symmetrical node |
| **+ · Insert** | Shape tool: add a node |
| **- · Delete** | Shape tool: delete the picked nodes |
| **double-click the line / a node** | Shape tool: add / delete a node |
| **arrows (Shift ×10)** | Shape tool: nudge the picked nodes |

## Image editor - Filter menu

| | |
|---|---|
| **Ctrl+F** | Last Filter |
| **Shift+Ctrl+X** | Liquify |

## Image editor - View menu

| | |
|---|---|
| **Ctrl+=** | Zoom In |
| **Ctrl+-** | Zoom Out |
| **Ctrl+0** | Fit on Screen |
| **Ctrl+1** | 100% |
| **Ctrl+R** | Rulers |
| **Ctrl+'** | Grid |
| **** | Mask Overlay |
| **F** | Full Screen Mode |

## Image editor - Window menu

| | |
|---|---|
| **F7** | Layers |
| **Tab** | Show / Hide Panels |
| **Alt+F9** | Actions |
| **Alt+F7** | Dockers: Transform |
| **Shift+Ctrl+A** | Dockers: Align and Distribute |
| **Alt+Enter** | Dockers: Object Properties |
| **Ctrl+Tab** | Next Document |
| **Shift+Ctrl+Tab** | Previous Document |

## Image editor - Help menu

| | |
|---|---|
| **F1** | Image Editor Help |
| **Ctrl+K** | Command Palette |

## Image editor - single keys and clicks

| | |
|---|---|
| **Q** | Quick Mask on / off |
| **X** | Swap the foreground / background colours |
| **D** | Default colours (black / white) |
| **F** | Full screen |
| **K** | Selection brush |
| **1 … 0** | Brush opacity 10 … 100 % (paint tools) |
| **[ / ]** | Brush size smaller / bigger |
| **Tab** | Show / hide the panels |
| **Shift+Tab** | Show / hide the panel groups |
| **** | Mask overlay: red where the mask hides (always while painting a mask) |
| **Space (hold)** | Pan |
| **Enter** | Apply the shown result / close a polygon |
| **Esc** | Discard results / cancel a polygon / leave the mask view |
| **Shift / Alt / Shift+Alt** | Selection tools: add / subtract / intersect |
| **Click / Shift / Alt** | Object Selection: the thing / add one / take one away (drag = a box) |
| **Ctrl+click a layer** | Pick it for Compose / → References (in order) |
| **Ctrl+click a thumbnail** | Load its transparency (or mask) as the selection |
| **Alt+click a mask** | View the mask itself |
| **Shift+click a mask** | Disable / enable the mask |
| **Alt+click the eye** | Show only this layer |
| **O** | Sketch: the Offset tool (F = the other side, Enter = the typed distance) |
| **Shift + middle-drag** | Orbit the picked 3D body (or 3D view layer) |
| **Middle-drag** | Pan the canvas |
| **Shift+right-click** | In Artist mode: back to normal (Ctrl+Esc / Ctrl+Shift+F too - on Windows Ctrl+Esc can open the Start menu); no context menu opens |

## Sketcher - over the docker

| | |
|---|---|
| **Space** | Select |
| **L / R / C / N** | Line / Rectangle / Circle / Polygon |
| **P** | Push/Pull |
| **M / Q / S** | Move (Ctrl: a copy) / Rotate / Scale |
| **F** | Offset |
| **T / B / E** | Tape / Paint / Eraser |
| **O / H** | Orbit / Pan (the middle / right button always) |
| **→ ← ↑ / ↓** | Keep the red / green / blue axis / let it go (Shift: the axis shown) |
| **G** | Group what is picked (a group picked: explode it) |
| **Shift+Z** | Everything in view |
| **U / W** | Room / Wall |
| **D / I** | Door / Window (on a wall) |
| **J / K** | Floor / Ceiling on-off |
| **Y** | Roof (Shift+click: more rooms under it) |
| **X** | Light (the type in the panel) |
| **V** | Stairs |
| **Drag a room (Select)** | Its wall snaps onto a neighbour's - one shared wall |
| **Delete** | Erase what is picked |
| **Esc** | Stop the tool / let go / restore the maximized docker |
| **a number** | Into the Measurements box - Enter applies it (3,2 · 150cm · 36s) |
| **Ctrl+Z / Ctrl+Y / Ctrl+S** | Undo / redo / save |
| **Esc** | Cancel the tool / leave the group |
| **Double-click a picked camera** | Move arrows ⇄ rotate rings |

# Instructions

## Contents


The window

One clip from a prompt

Characters

A film on the scene board

A music video

LTX 2.5 (first / last frame, lipsync, audio to video)

LTX 2.3 and 3D render → real (Blender → photoreal)

Sketcher - 3D modelling (2.619.0)

Editing on the timeline: speed, colour, sound, mix and captions (2.406.0)

Edit tools, colour panel, export queue and exchange (2.407.0)

Edit by transcript, scene cuts, karaoke word fixes (2.408.0)

Override style for every video model (2.409.0)

Effects and ◐ adjustment layers (2.409.0)

Karaoke: word nudges, the line under the marker (2.433.0)

Karaoke and Tools as dockers beside the canvas (2.410.0)

⌨ Timeline keys, markers, In / Out export, frames (2.410.0)

Text effect presets (2.411.0)

J / K / L, AV1, 10-bit, the graphics card (2.411.0)

Smaller editing jobs (2.412.0)

Partly-done editing items finished (2.413.0)

Nested sequences, the fuller XML, FCPXML, whole-sequence transcripts (2.414.0)

Track mixer, distort effects, the transitions library, colour match (2.415.0)

Masks + tracking, multi-camera, proxies (2.416.0)

HDR, AAF, the sound of reversed clips, motion graphics templates (2.417.0)

Real-time playback: the render bar, ⚡ Render, , playback resolution (2.418.0)

One prompt docker, ⊖ the negative prompt docker (2.419.0)

Fine-tunes in the trainer: checkpoints, the assistant (LLM) and the vision model (2.521.0)

The LoRA trainer, peak / off-peak prices, the usage log, Remote GPU, packages in Settings (2.520.0)

Setup asks for your hardware and picks a package; the daily supply charge (2.519.0)

Queue presets, the Model manager, Civitai downloads, energy cost, the Testing docker (2.518.0)

Power draw and clock speeds, the energy a job used; Anima image styles (2.517.0)

Keyframes on any setting; Krea 2 image styles (2.516.0)

Cut out a subject, solve the camera, remove an object; theme edit mode for dialogs (2.515.0)

Edit theme mode: every button and its words (2.623.0)

Edit theme mode: resize, move, hide, rename; leaving saves; folding dockers (2.514.0)

Load UE project, the timeline's frame size bar (2.513.0)

Lottie (JSON) export (2.512.0)

Variable mask feather, data-driven animation and template fields (2.511.0)

2D layers in 3D: cards, a moving camera, depth of field, shadows (2.510.0)

Motion sketch, the wiggler and the smoother (2.509.0)

Audio → keys, waveform and spectrum layers (2.508.0)

Puppet pins and mesh warp (2.507.0)

Particles and light rays (2.506.0)

Generator layers and distortions: fractal noise, gradient ramp, turbulent displace, displacement map (2.505.0)

DLSS 5: enhance, upscale and frame generation for videos (2.504.0)

Long video: one MiniMax H3 run up to 30 seconds (2.503.0)

FLUX 3 Image Klein, and edit image mode lists only edit styles (2.502.0)

Time remapping on a curve (2.501.0)

Motion blur, Posterize Time, Echo (2.500.0)

Tracking and corner pin (2.499.0)

Bézier masks (2.498.0)

Expressions (2.497.0)

AI inside the timeline (2.420.0)
The GPU compositor (2.420.0)
Wan 2.1 and Wan 2.2
VR World (a performer inside a 360° / 180° picture)
Character swap
The H3_Viggle style
The SFX dock
Save and Save as (preview dialog and gallery)
Transitions between song segments (bridge scenes)
Render size on the scene board
The timeline's preview canvas
Render size with H3
Scenes and the song
Nudging timeline clips
Override style and the StoryBoard
Recycle bin and resetting a project
Karaoke: lyrics with a bouncing ball
Saving and opening a project
Starting a new project
Saving and clearing the prompt chat
Screenshots and screen recordings (promos, tutorials)
CFG on MiniMax H3
Speech with emotion in a character's voice (no song)
How bitGen writes a MiniMax H3 prompt with speech
Lip sync on a music-video board
The prompt LLM and your references
Reference videos and sounds in a prompt render
Append / Prepend a reference video (2.388.0)
The floating prompt docker (2.389.0)

Freehand shapes, Merge Paths, text on a path, roving keyframes (2.496.0)
Colour blend modes, and video layers that follow a parent (2.495.0)
The CAD workings refined: the CAD button, Offset, the view cube, picking profiles (2.494.0)
Text animators (2.493.0)
Shape layers and their operators (2.492.0)
Blend modes and track mattes (2.491.0)
Parenting and null objects (2.490.0)
The Graph Editor, Easy Ease, the anchor point and curved motion paths (2.489.0)
PDF pages added, taken out and moved; Select Subject without a download - round H (2.488.0)
Image ▸ Mode, Proof Colors, Gamut Warning, CMYK TIFF - round G (2.487.0)
Auto-Align Layers, Auto-Blend Layers, Photomerge, Merge to HDR - round F, part 2 (2.486.0)
More file types, File Info, Print, Contact Sheet, Crop and Straighten Photos - round F (2.485.0)
Brush Settings, brush presets and .abr brushes - round E (2.484.0)
Navigator, Histogram, Info, measuring tools, Grow / Similar / Focus Area, Matting - round D (2.483.0)
The Develop Filter and Lens Correction - the image editor's gap, round C (2.482.0)
44 more filters - the image editor's gap, round B (2.481.0)
More adjustments and Apply Image - the image editor's gap, round A (2.480.0)
JPEG XL (.jxl) pictures (2.479.0)
Search in every dropdown list (2.478.0)
The public beta: the repository, what is experimental, reporting a problem (2.477.0)
Unreal lights, volumetric lights and fog - in the image editor and the timeline (2.476.0)
The Unreal camera in the image editor: move it, lens, f-stop, exposure, presets (2.475.0)
No tool, the selection box and several layers at once (2.474.0)
The Feature Reference PDF (2.473.0)
The Unreal Engine 5.8 bridge: Unreal layers, MetaHuman layers, the Unreal camera (2.472.0)
Parametric 3D bodies: Extrude, Revolve, Fillet, Chamfer, Shell, Split Body (2.471.0)
Picking like a drawing program + the CAD toolbar (2.470.0)
Linked smart objects, PSD smart objects kept, .atn actions (2.469.0)
Actions: brush strokes + hand-made selections recorded, conditionals, Image Processor, droplets (2.468.0)

Basic Settings and LLM tokens float (2.393.0)

Choosing the frames of a reference video

Images, ControlNet and face fix

The image editor (with AI)

Music, stems and voices

Timeline and export

The menu bar

Path layers (2.387.0)

The camera path: pan, tilt, roll, dolly, height, a 3D path (2.399.0)

Upscaling a video with SeedVR2; the queue's running card (2.400.0, Enhance 2.401.0)

The video style in Basic Settings (2.401.0)

The statusbar's docker buttons, the 3D toolbar (2.386.0)

Tools & Properties, keyframes, 3D widgets, lights, materials, Blender (2.385.0)

Seeds and render details

The position marker, layer colours

Layer names

Dock sizes, pins and maximize

Docker configs: a saved layout for each set of dockers (2.392.0)

▾ Which picture the prompt docker works from: references or layers, and Compose (2.543.0)

A Blender layer: the timeline's scene tools in the image editor (2.542.0)

▾ Generate, Edit, Refine, Fill, Replace background, Remove, and Blender mode (2.541.0)

Update bitGen Studio from GitHub (2.540.5)

Settings ▸ Add-ons: optional engines installed in the app (2.540.4)

Blender and Unreal renders made real with the reference docker's pictures (2.540.0)

Reference descriptions, the house types, references in the house builder and the image editor (2.539.0)

Civitai downloads into each type's folder, the folders, Sync (2.538.0)

◯ Lights in the house builder (2.538.0)

Maximize beside the side dockers (2.538.0)

Editing single colour channels; spot channels (2.467.0)

OpenType features, optical kerning, type to outlines, text in a shape, round corners on any path (2.466.0)

Puppet pin depth + rotation; the Patch tool's Content-Aware mode (2.465.0)

Sketch layers: typed sizes, the Measure tool, units, DXF / SVG files (2.464.0)

Sketch modify tools: trim, extend, fillet, offset, mirror, patterns, polygon, slot, splines (2.463.0)

Sketch layers: a CAD sketch with constraints and dimensions (2.462.0)

Poses on the timeline, and the Daz live link (2.461.0)

3D layers: a Daz / Blender scene in the image editor (2.460.0)

Tools named by what they do (2.459.0)

Auto, floorplan and chain dimensions (2.458.0)

Dimension groups (2.457.0)

The StoryBoard (2.456.0)

Edit theme mode leaves dialogs working (2.455.0)

The panel column is a docker; every tab group floats (2.454.0)

Frames lock their contents (2.453.0)

Move tool: scale / rotate handles, transform options (2.452.0)

The editor's Edit / Generate tabs drive the prompt docker, Del, quick prompts (2.451.0)

Warp grid + split lines, Liquify extras (2.450.0)

Per-character type (2.449.0)

The Content-Aware Fill workspace (2.448.0)

Artboards (2.447.0)

Rulers, guidelines and snapping on the timeline's preview canvas (2.446.0)

Grid buttons, the Grids & Guides settings (2.445.0)

The image editor's Edit / Generate run from the prompt docker, ⚙ editor settings (2.444.0)

Edit theme mode: style anything on screen (2.443.0)

Frames: layers inside a shape, Edit Frame, generate into a shape (2.442.0)

CAD dimensions: exact points, live ends, a scale (2.441.0)

Rulers, guidelines and snapping (2.440.0)


Models: pages, folder tabs, card size, the model info page and Civitai info for every model (2.537.0)
Veda sparse attention - a faster MiniMax H3 (2.536.0)
FLUX 3 Klein needs ComfyUI 0.41 or newer (2.535.0)
Test mode, and new renders joining the open preview (2.534.0)
Dropdown lists inside a dialog open in front of it (2.533.0)
Tests tick themselves, docker title bars, selecting and walking a camera in the House builder (2.532.0)
A missing model file says where to get it (2.531.0)
Find anything - the Ctrl+K command palette and Help (2.530.0)
House builder extras - roof, trace a plan, furnish, .glb, shot list (2.529.0)
Characters in House shots (2.528.0)
The Style doctor - which styles work, and why the others don't (2.527.0)
Workspaces - Basic, Image editing, Video editing, Music video, Expert (2.526.0)
A model in another ComfyUI folder is still found (2.525.0)
The House builder - a floor plan you can use as a Location (2.524.0)
A style's model can be a .gguf or a .safetensors (2.523.0)
Reporting a bug (2.522.0)
The property bar, corner radii, Add / Subtract into a shape, line width and style (2.439.0)
Floating dockers, named dockers, dialogs in the middle (2.438.0)
Generate fill in a shape or a mask, the pattern library (2.437.0)
Project files: .bgi, .bgv, .bgp (2.436.0)
Saved themes and PDF fonts (2.435.0)
Themes and the UI size (2.432.0)
PDFs: the guide and the brochure (2.392.0)
3D text and 3D models on the timeline canvas
Generate progress
Projects, queue and gallery
Grouping and deleting assets
Adding files with the + tiles (2.394.0)
The file dialog
Tips
Credits

A tour of the studio, from a single prompt to a finished film. If it is not installed yet, start with INSTALL.md.


- The window
- One clip from a prompt
- Characters
- A film on the scene board
- A music video
- Character swap
- Choosing the frames of a reference video
- Images, ControlNet and face fix
- Music, stems and voices
- Timeline and export
- Sketcher - 3D modelling
- Projects, queue and gallery
- The file dialog
- Tips
- Credits


---

## The window

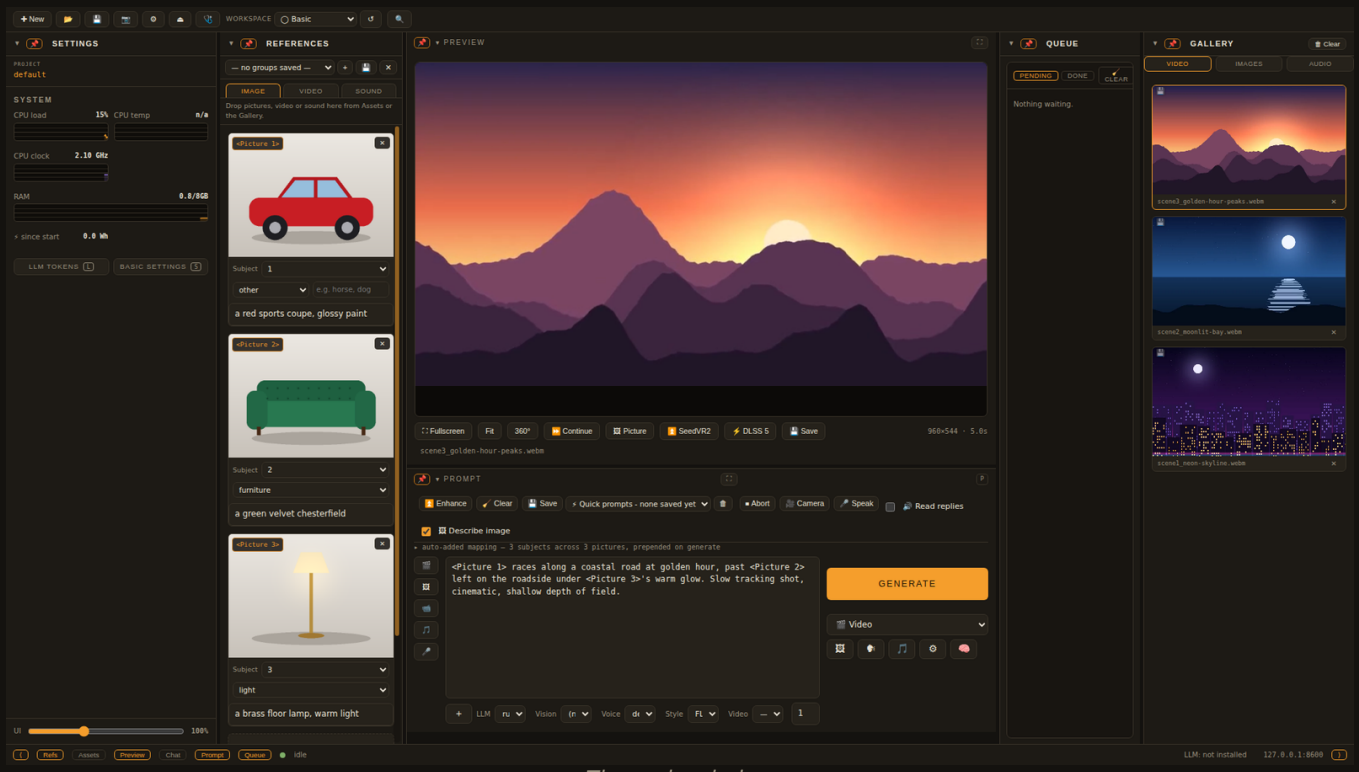


*The main window*

| Area | What it is |
|---|---|
| **Left** | system stats, and two buttons that show the floating **LLM tokens** (L) and **Basic Settings** (S) windows. Basic Settings holds the generation mode (Ref · F/L · Text · Swap), resolution, aspect, seconds, steps, CFG, seed, format, LoRAs, ControlNet, face fix |
| **References** | pictures, videos and sounds that ride the next generation (drag them in from Assets or the Gallery) |

| | |
|---|---|
| **Assets** | the project's images, videos and sounds — drop files here to import them |
| **Centre dockers** | Preview, Timeline, **Video** (the scene board), Music, Stems, Image editor, ComfyUI, **Prompt**, Prompt chat, Console |
| **Queue** | pending and finished jobs, with their logs |
| **Gallery** | everything you have rendered |

The buttons along the bottom show and hide each docker; every docker can be collapsed (▾) or maximized ( — Esc restores). The layout is remembered.

## One clip from a prompt

1 In **Basic Settings** (press **S** to show it) pick a mode:

– **Ref** (ref2va) — up to 9 reference pictures; each tray slot is a `<Picture n>` you can refer to in the prompt (click the slot's badge to insert its tag). Videos and sounds in the References dock ride too.

– **F/L** (fl2va) — one picture = the first frame, two = animate from the first to the last.

– **Text** (t2va) — no references.

– **Swap** — see Character swap.

– **Type** under each Ref picture (person, face, clothing, … , 2.340.0: **first frame**, **last frame**): set a picture's Type to **first frame** and Generate renders **First/Last** (fl2va) from it — to the picture typed **last frame** when there is one. The other pictures are not used (the console says so). Without a first frame the render stays **Ref** (ref2va, at most 9 pictures) and a lone last frame counts as an ordinary reference. LTX 2.5 styles use the same Types: the first frame goes first, the last frame last.

2 Choose resolution, aspect and **Seconds**. MiniMax H3 renders 24 fps; a clip longer than your card can do in one run is split and joined seamlessly.

3 Write the prompt and press **GENERATE** (the dropdown under it says what Generate makes: Video, Image, Music, Speech, ⚙ Graph, Chat).


`/br/` on its own line splits the prompt into several jobs that run one after another. Press **Enter** in the prompt to have the local LLM improve it. **Enhance** upscales the selected video (see *Upscaling a video with SeedVR2*).

## Characters

In the **Video** docker's **Characters** section:

- **NEW** — a character with a name, details, a **character sheet** (front / side / back picture) and optionally a **voice clip**. Its `@tag` (e.g. `@anna`) is how prompts and the screenplay refer to it.
- **NEW** — make a character *from one picture*: upload a photo or a render and a reference sheet is generated (your own pose sheet from the pose_sheets folder, photo or illustrated style), then **Keep** it.
- **Actors** — choose who is in the current scene; only they ride the references and the screenplay.
- Each character keeps a dataset folder for **RefMod** (identity models), clothing entries that follow the character from scene to scene, and its own voice for native-audio dialogue.

# A film on the scene board

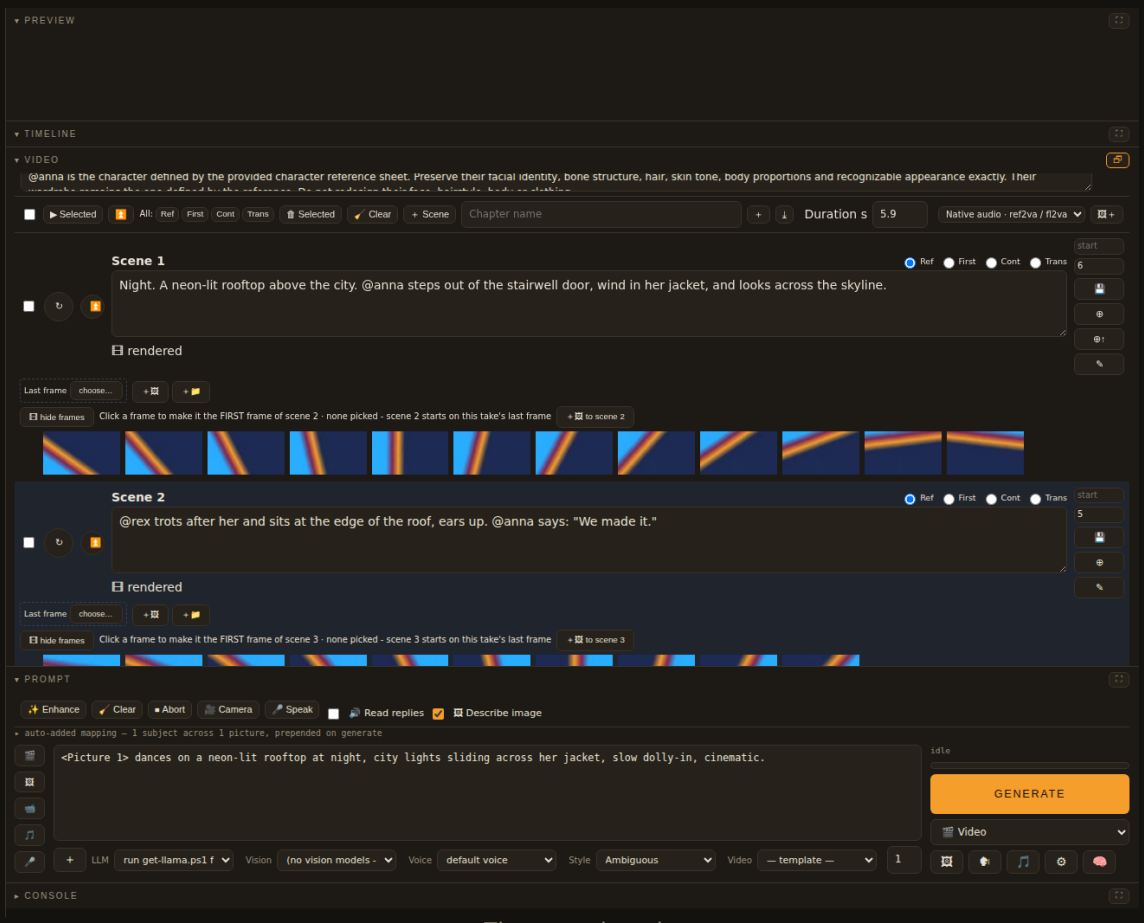


*The scene board*

1 **Workflow** (top of the StoryBoard): *Native audio · ref2va / fl2va* — each scene is its own clip with video **and** sound.

2 **Scenes**: type how many scenes you want, or leave it blank — then `projects\<name>\scenes.txt`, the number in your request, or the LLM decides.

3 In the prompt, press (*create screenplay*) and describe the story, e.g. *create screenplay: Anna and Rex reach the rooftop at night...* The LLM writes the scenes onto the board, with the characters speaking their lines (`@anna says: "We made it."`). No song = a film: the model makes the dialogue, effects and ambience itself, in each character's cloned voice.

4 For each scene choose how it follows the one before:

| | |
|---|---|
| **Ref** | a new shot from the references (character sheets, location pictures); on Native audio the previous take's end rides as a transition video |
| **First** | starts **exactly** on a frame of the previous take (fl2va — no character sheets) |
| **Cont** | opens on that frame **with** the cast sheets, so the character stays consistent |
| **Trans** | travels from that frame to the new location's picture |

**All:** sets every scene at once.

1 Press a scene's round ▶ to render it, or tick scenes and ▶ **Selected**. Rendering continues in the background; you can keep editing.

2 Under each take is its **filmstrip** — click a frame to make it the first frame of the next scene. ✎ **First frame (Qwen 2.1)** (2.337.0) — open the accordion under a scene's First / Last frame slots to *make* its first frame with Qwen Image 2.1: tick the **characters** (their sheets), pick a **location** picture and up to three **props**, type a line of direction (or leave it empty to use the scene's own prompt) and press ✎ **Make first frame**. **Start from** chooses the picture Qwen edits: the location (the characters are placed into it), **the frame the scene continues from** (same pose and position, the location changed — for Cont / First / Trans scenes), or the scene's own First picture;

*Auto* picks the continue frame when there is one. The result lands in the scene's **First** slot (a Ref scene becomes First). It needs the Qwen Image 2.1 models (Setup → Models → Image editing).

3. The take bar under the board: ▶ watch · ✔ keep · ↻ redo · ⇄ swap the character. upscales a take you like with the ⚙ upscaler (no new render).
4. **Compile** (at the top of the StoryBoard) joins the rendered takes into one film, in scene order. From 2.391.0 the board no longer has its own Produce and ⇥ Timeline buttons.

The **info line** at the bottom of the StoryBoard is the same height as the status bar. It shows the docker's latest message; hover it to read the whole text.

**The Scenes dropdown (2.391.1).** The scene board (the shared prompt, the scene menubar and the scene cards) sits in a **Scenes** dropdown like Characters and Locations. Click its title to open or close it; the title counts the scenes and how many are rendering.

Inside it, the **scene picker** above the cards shows **All scenes** or just one scene's card. Each scene is listed with its state ( rendering, ● rendered, ✔ kept, ✕ failed) and the first words of its prompt. ◀ and ▶ step to the previous or next scene. The picker remembers your choice.

While a scene renders, its card says **rendering step n of total**, with a progress bar and the time so far. Before the first step it says **rendering - loading the models**.

A full **PDF guide** with every shortcut key is in `docs\bitGen-Studio-Guide.pdf`.

⚙ (render settings) sets the scenes' size, steps, LoRAs, the Sage / Spectrum / Comfy Kitchen accelerators, the upscaler and the tail frames used for continuity. **New** / **Save** / **Load** at the top of the StoryBoard start, save and reload whole movies (cast, chapters, scenes and renders).

## A music video

1. **Load** a song (or pick it in the **Audio** dropdown). Its waveform opens auto-segmented; adjust the cuts and — one scene per segment, each with its start and duration.
2. Press (*create music video*) in the prompt dock and describe it; the writer uses the song's segments as the scenes and makes the characters sing their lines.
3. Every scene lip-syncs its own window of the song.

## LTX 2.5 (first / last frame, lipsync, audio to video)

LTX 2.5 renders through Tim's **LTX 2.5 All-In-One** canvas (`comfy_workflows/LTX25_All_In_One.json`), one mode per clip. Pick the **LTX 2.5** video style (Settings → Video styles has it as a starter).

**From the prompt dock.** With the LTX 2.5 style picked, two dropdowns appear beside the template list:

- **LTX mode** — *Auto* picks from what the reference dock holds:

| reference dock | mode |
|---|---|
| a video (+ picture 1) | video to video (style transfer, pose from the video) |
| audio + 3 pictures | first / middle / last (pictures 1, 2, 3) |
| audio + 2 pictures | first / last lipsync |
| audio + 1 picture | lipsync (picture 1 sings the audio) |
| audio only | audio to video |
| 2 pictures | first / last frame |
| 1 picture | image to video (picture 1 is the first frame) |
| nothing | text to video |

Or choose the mode yourself; a mode missing its pictures / audio says what to load. Only the first audio and the first video in the dock are used.

- **Transition** — the *ltx2.3-transition* LoRA. *Auto* turns it on only for the modes that travel between pictures (first / last, first / last lipsync, first / middle / last).

The **Seconds**, **Width / Height** (rounded to multiples of 32) and **Seed** fields apply; clips are 24 fps, 1–30 s.

**On the scene board.** Set the StoryBoard's **Workflow** to **LTX 2.5**. Each scene's card decides the mode:

| scene | no song | with the board's song |
|---|---|---|
| **Ref** (nothing set) | text to video | audio to video |
| **First / Cont** (or a First picture) | image to video from that frame | lipsync on the scene's slice of the song |
| **Trans** (or a Last picture) | first / last frame: from the continue frame to the Last picture (else the location picture) | first / last lipsync |

**Which workflow runs (2.401.5).** *Text to video*, *image to video* and *first / last frame* run on **Comfy-Org's own LTX 2.5 templates** (`comfy_workflows/ltx25_official_t2v.json`, `_i2v`, `_flf2v`). They use only nodes built into ComfyUI, so nothing has to be installed from the Manager. The app fills them in for you: your prompt, seconds, size, seed, the picture(s), your style's LoRAs and negative. If your model is the GGUF, it is loaded with ComfyUI-GGUF. They need ComfyUI's LTX 2.5 files: the transformer (int8 or the GGUF), the Gemma 4 12B text encoder, the video and audio VAEs, and the x2 upscaler (first / last frame does not need the upscaler). If one of them is missing, the job log says which one and the canvas renders the clip instead. The canvas keeps the modes only it has (audio to video, lipsync, first / last lipsync, first / middle / last, style transfer), LTX Ripple, the timeline camera's exact path, and the *Transition* LoRA when you set it to *On*. The job log shows which workflow ran: "on Comfy-Org's own template …" or "converted LTX25_All_In_One.json …". Keep ComfyUI up to date: the templates use newer core nodes (TextGenerateLTX2Prompt, ComfySwitchNode, ResizeImageMaskNode).

✎ First frame (Qwen 2.1) works here too — make the opening picture, then render. @tags in the prompt become the characters' names (LTX has no reference sheets; the look comes from the first frame). upscale is not available on LTX takes yet.

**Models and nodes.** *Settings → Models → Model catalog* (or the setup wizard's Models page) → *Video - LTX 2.5*:

- the Q4_K_M GGUF (15 GB, what the canvas loads) or the int8 model;
- the Gemma 4 12B text encoder and the Gemma 4 E2B one;
- the video / audio VAEs, the TAE preview VAE and the spatial upscaler;
- (2.341.0) the canvas's LoRAs: OmniNFT RL, Transition, IC-LoRA Union Control (style transfer), IC-LoRA Detailer, and LTX Ripple.

The Lightricks repos are gated: accept their licences on Hugging Face and put your token in the catalog. **Download with** the Hugging Face CLI (**Install hf CLI** adds it) for the big files. The canvas needs the node packs ComfyUI-GGUF, KJNodes, VideoHelperSuite, rgthree, mxToolkit, Easy-Use and controlnet_aux (Setup → Node packs); a missing one is named, with its pack, when the job starts. Since 2.401.2 the canvas no longer needs ComfyMath (it has gone from GitHub) or the pysssss math node: its number conversions and formulas run on ComfyUI's own **Math Expression** node. If you re-export the canvas from your own ComfyUI with those nodes still in it, the app converts them when the job starts. Since 2.401.3 it no longer needs ComfyUI-MediaMixer either: its "last frame" pick runs on KJNodes (Get Image Range From Batch), which the canvas already uses.

Every video job (MiniMax H3, Wan, LTX, the swap, Viggle, SeedVR2) now shows ComfyUI's live progress: which node is running and "step n of total" while it samples. A long silence with "running UNETLoader" or a loader node means ComfyUI is still loading the model; Wan 2.2's two 14B models can take several minutes the first time.

# LTX 2.3 and 3D render → real (Blender → photoreal)

Pick the **LTX 2.3** video style (Settings → Video styles has it as a starter). It runs **Comfy-Org's own LTX 2.3 templates**, which use only nodes built into ComfyUI (`comfy_workflows/ltx23_official_*.json`). It has four modes. The LTX mode dropdown shows only these, and *Auto* picks by what's in the reference dock:

| reference dock | mode |
|---|---|
| a video | **3D render → real**. The video is a render (Blender, a game viewport, any CG clip); fal's **3DREAL** IC-LoRA turns it photoreal with the same layout and camera move. A picture as well = a real first frame (optional). |
| 2 pictures | first / last frame |
| 1 picture | image to video (first frame) |
| nothing | text to video |

Lipsync, audio to video, first / middle / last and style transfer are LTX 2.5 canvas modes. Pick the LTX 2.5 style for those.

**3DREAL** (huggingface.co/fal/LTX-2.3-3DREAL-LoRA): the select beside the mode picks the variant:

- *strong v2*: the newest (several scenes, audio, better faces);
- *strong*: a harder photoreal push;
- *light*: faithful and gentle;
- *Auto*: the newest one ComfyUI has.

bitGen puts the LoRA's trigger at the front of your prompt ("3DREAL. Make it photorealistic. …"). Describe what the shot should look like: materials, light, weather, time of day.

**From Blender** (bitgen-blender-addon 1.1): lay the scene out in Blender, then use **sidebar (N) → bitGen → Render scene (LTX 2.3 · 3DREAL)**. Grey boxes and a camera move are enough. The settings:

- **Looks like**: the prompt.
- **Engine**: *Solid* (the fastest; a blockout is enough), *EEVEE*, or the scene's own engine.
- **3DREAL**: the variant.
- **Strength**: how strongly the render guides LTX (1 = the LoRA's own).
- **Max seconds**: the length cap.
- **Render in bitGen**: when ticked, the job is queued straight away.

**Render scene → bitGen** renders the frame range through the **scene camera**. The long side is at most 1280, both sides are multiples of 32, and the output is H.264 .mp4. It's sent to the open project as **Video assets → blender_<name>.mp4**, and when *Render in bitGen* is ticked the LTX 2.3 job starts at once. Every render setting in Blender is put back afterwards. Untick *Render in bitGen* to send only the render, then put it in the reference dock yourself (add a real first picture if you like).

**Models** (*Settings → Models → Model catalog → Video - LTX 2.3*), in ComfyUI's folders:

- **checkpoints**: `ltx-2.3-22b-distilled-fp8` runs every mode. Add `ltx-2.3-22b-dev-fp8` + `ltx_2.3_22b_distilled_1.1_lora…` (loras) to run text / image the way Comfy-Org's template does.
- **text_encoders**: `gemma_3_12B_it_fp4_mixed`.
- **latent_upscale_models**: `ltx-2.3-spatial-upscaler-x2-1.1` (text / image).
- **loras**: `3DREAL-strong-v2` / `3DREAL-strong` / `3DREAL-light`, and optionally the Gemma "abliterated" LoRA (left out when it is missing).

The job log names the checkpoint, the encoder and the 3DREAL file it used, and says what it left out. Keep ComfyUI up to date: the templates use its newest LTX nodes (GetICLoRAParameters, LTXVAddGuide, LTXAVTextEncoderLoader).

## A .blend in the preview canvas: look around, edit, render a segment to real

Click in the timeline canvas's tools and pick a `.blend`. Blender (headless) reads it and the scene appears over the preview canvas, framed at the scene's render size. bitGen works on a copy: `<project>/blender/<name>.tmp`. The original isn't touched until you save to it.

- **Scene camera** looks through the scene's active camera, with its animation playing. **Free view**: drag to orbit, right-drag or Shift-drag to pan, the wheel to zoom, **F** to frame everything.
- **Zoom** (2.546.0): **/** , or **Alt+drag** - forward (up) zooms in, back (down) zooms out. **Zoom to object** (or **Z**) brings the view to the picked object from the side you are looking from; with nothing picked it frames the whole scene. Zooming from the Scene camera switches to the free view at the camera's place first.
- **Select** an object by clicking it, or in the object list in **Tools & Properties** (key 1). **G / R / S** (or ✥ ) switch the widget between move, rotate and scale. The Properties also take X / Y / Z (Blender's axes) and a size.
- **Edits**:
  - Moving an object that Blender animates puts a **key** at the current frame. Moving any other object gives it a new place. Tick *Auto-key every move* to key everything.
  - ◆ **Key** keys the object here, × **Key** removes this frame's key, and the key row (◇ Blender's, ◆ yours) jumps to a key.
  - duplicates, ◌ **Hide** / hides it in the render, deletes, ↺ drops its edits.
  - **Ctrl+Z** undoes. The preview plays between keys in straight lines; Blender eases them.
- **Segment**: scrub the frame bar, then **[ In** and **Out ]**. The bar shows the length; LTX takes up to 30 s.
- **Save to** (in the Properties):
  - *Only in bitGen*: `<project>/blender/<name>.blend`.
  - *Write back to the original .blend*: Blender keeps the old one as `.blend1`.
  - *Copy to a new file*: `<name>_bitgen.blend` beside the original.

**Save** always writes the project's `<name>.blend` as well, and bakes your edits into the working copy.

- **Render to real**: pick the camera (*the scene camera*, or *this view* for a still camera where you are looking), the engine (*Solid* is enough for a blockout), the look, the 3DREAL variant and strength, then **Render to real**. Blender renders the segment to **Video assets → blender_<name>_<in>-<out>.mp4**, and with *Render in bitGen* ticked the LTX 2.3 3DREAL job is queued, as with the add-on's Render scene.
- × returns to the timeline canvas. The scene stays open; brings it back. **Reload** drops your edits and reads the .blend again.

Blender must be installed ( Blender settings has its path).

## Build a scene with AI, and 3D models from pictures

The local LLM can lay out a 3D scene for you. Open (with no scene open you get **Open a .blend** and **Build a scene with AI**; with one open, **New scene with AI** ▸ sits at the top of the Properties). Describe the shot (what is there, what moves, how the camera moves), set the length, and press **Build**:

1. The LLM writes a **plan**: every object as a known kind (car, truck, tree, house, building, road, person, dog, lamp post, bench, table … 58 in all) with its size in metres, its place, its turn and its colour, what moves when, and the camera's path. It never writes code. A reply that isn't a plan is asked for again once.
2. Things no kind fits (an animal, a statue, a special vehicle, a character) become **3D models**. Each is first drawn as a picture with the image style picked in Basic Settings (alone, on white), then turned into a .glb in ComfyUI. *Max 3D* caps how many; untick *3D models* to draw everything from simple shapes. These are normal jobs in the queue.

3 Blender builds `<project>/blender/ai/<title>.blend` (the plan is saved beside it as `<title>.plan.json`) and it opens in the preview: look around, move things, key them, then **Render to real**. Building the same title again makes `<title>_2.blend`; nothing is overwritten.

If a picture or a 3D model can't be made, that object becomes a simple stand-in of its kind and the log says why; the scene is still built. ■ **Stop** stops a build.

**Image to 3D** (ComfyUI's own nodes, Comfy-Org's templates):

| choice | what you get | files (Settings → Models → Model catalog → **3D models**) |
|---|---|---|
| **Hunyuan3D 2.1** (default) | the shape, no colours; 3DREAL paints the real look anyway | `hunyuan_3d_v2.1.safetensors` (checkpoints), `birefnet.safetensors` (background_removal - cuts the object out first, optional) |
| **TRELLIS.2** | shape + baked texture, slower | `trellis_2_int8_convrot` (diffusion_models), `trellis_2_shape_vae_bf16` + `trellis_2_texture_vae_bf16` (vae), `dino_v3_L_naf_fp32` (clip_vision), `birefnet` |

*Auto* uses Hunyuan3D 2.1 when it's there, otherwise TRELLIS.2. A missing file is named in the job's log.

**on any picture**: every picture in the Gallery (Images) and the Assets dock (Images) has a . Pick Hunyuan3D or TRELLIS.2 and the .glb lands in the project's `models3d/`. From there, **Model** in the .blend preview's Properties adds it to the open scene (1 m tall, standing where the view looks; scale it with S or the Size box) and Save puts it into the .blend. The timeline's 3D layers can use the same files.

Licences: Hunyuan3D 2.1 is under Tencent's Hunyuan 3D community licence (it excludes the EU, the UK and South Korea); TRELLIS.2's code is MIT (some of its parts carry their own licences). Check each model's licence before commercial use.

## Daz Studio → bitGen (the bitGen Bridge script)

**Install** `bitgen-daz-bridge-v1.0.0.zip`: copy its `Scripts` folder into one of your Daz content libraries (for example *Documents/DAZ 3D/Studio/My Library*). In Daz Studio, open **Content Library → (your library) → Scripts → bitGen** and double-click **bitGen Bridge**. To keep it handy, drag it onto a toolbar with *Window → Workspace → Customize*. It works with Daz Studio 4.2x and Daz Studio 2025 / 6. bitGen Studio must be running on the same computer; **Test connection** checks it.

The bridge window (it has its own title bar) offers five sends:

| send | what bitGen does |
|---|---|
| **Render the animation → real** | Daz renders the timeline's play range with *your* render settings (Iray, Filament or 3Delight; Filament is quick). The frames become `daz_<scene>.mp4` in Video assets (long side 1280, up to 30 s). With *Render in bitGen right away* ticked, LTX 2.3 · 3DREAL renders it real, using your *Looks like* text, the 3DREAL variant and the strength. |
| **Render this frame → a picture** | Goes into the Gallery and Images assets, ready for references, first frames or 3D. |
| **The scene as 3D → open in bitGen's preview** | Daz exports FBX: figures with their rig and animation, props, and lights / cameras as ticked. Blender turns it into `blender/daz/<scene>.blend` and it opens in the preview, where you can edit it and render it to real. |
| **The scene as 3D → merge into the scene open in bitGen** | bitGen opens the **Merge** dialog (see below). |
| **The selected figure / prop → a 3D model** | Saved to `models3d/<figure>.glb`, to use with Model in the preview. Tick *also add it as a 3D layer* to put it on the timeline too. |

**The Merge dialog** pops up in bitGen when a Daz scene arrives to be merged while a .blend is open in the preview. You can drag it by its title bar; × or Esc closes it and keeps the scene waiting. It lists the Daz scene in three groups: **Figures & objects**, **Lights** and **Cameras**. Each item has a tick, and each group has *all* / *none*. Then choose:

- **Scene camera**: keep the scene's own camera, or use one of the ticked Daz cameras.
- **Stretch the frame range**: extend the scene to cover the Daz animation.

**Merge** appends the ticked items, each with everything under it (a figure's body and clothing come with its rig), into a "Daz" collection in the open .blend. Daz animation is respaced to the scene's frame rate, for example 30 fps into a 24 fps scene, and the preview reloads. **Open on its own** opens the Daz scene by itself instead. **Cancel** drops it.

The 3D sends need Blender (bitGen finds it; * Blender settings* has its path). The bridge sends only the paths of the files Daz wrote, so Daz and bitGen must run on the same computer. It uses curl, which Windows 10+ and macOS include.

## Sketcher - 3D modelling (2.619.0)

The **Sketcher** docker (its button is in the status bar - it starts hidden) is for modelling in 3D the quick way: draw a shape on the ground or on a face, then push or pull it into a solid. Its has the whole list.

1. **R** (Rectangle), click a corner on the ground, move, and type `4,3` + Enter - a 4 × 3 m face.
2. **P** (Push/Pull), click the face, move up, type `2.7` + Enter - a box 2.7 m high.
3. Draw a rectangle **on** the box's side and push it in - a window opening; push it all the way through - a hole.
4. Or: **F** (Offset) on a floor face, 0.2 + Enter, then push the ring up - four walls round a room.

Sizes are typed at any moment (no need to click the box): lengths (`1.5`, `150cm`, `1500mm`, `5'`), two values (`3,2`), sides (`36s`), degrees. The marker shows what the point snaps to (Endpoint, Midpoint, On Edge, On Face, On Ground) and a dotted line when you are on the red / green / blue axis - **Shift** or → ← ↑ keep that axis. Middle drag orbits, right drag pans, the wheel zooms, **Shift+Z** shows everything.

Other tools: **L** Line (a line across a face splits it), **C** Circle, **N** Polygon, **M** Move (**Ctrl** = a copy, type `x,y,z`), **Q** Rotate, **S** Scale, **T** Tape, **B** Paint, **E** Eraser, **Space** Select (double-click a group to edit inside it, **G** makes a group). Models are kept in the project (projects/<project>/pushpull) and save themselves; ↶ ↷ undo / redo. ➜ **Send** puts the model in the image editor (a picture of the view), on the timeline (a 3D layer), in the House builder, Blender or Unreal; **Export** writes .glb / .obj / .stl; **Import** brings a project 3D model in as a group.

### Building: rooms, shared walls, doors, windows, roofs, lights (2.620.0)

The **Build** tools under the modelling tools make a building that stays editable:

1. **U** (Room), click a corner, type `4,3` + Enter - a 4 × 3 m room with walls, a floor and a ceiling.
2. Draw a second room a little way off, then with **Space** (Select) press on it and drag it toward the first. When its wall comes near the first room's wall it snaps onto it - the two rooms now have **one shared wall** (and their corners line up).
3. **D** (Door), click on the shared wall - the door goes right through it. **I** (Window), click on an outside wall. Drag a door or window along its wall with Select; its size, style and sill are in the panel on the right.
4. **X** (Light), pick the type in the panel - downlight, ceiling-mounted, pendant, chandelier, spot, wall light, floor or table lamp - and click in a room: it goes on that room's ceiling (the middle of the room snaps). **Night** turns the sun down so the lights light the rooms.
5. **Y** (Roof), click a room - a gable roof over it; **Shift+click** the other room to put it under the same roof. Gable, hip, shed or flat, with its pitch and overhang, in the panel. ⌂ **Cut-away** hides roofs and ceilings.

Also: **W** Wall (free-standing walls; click the start again for a room), **J** Floor (a floor without walls), **K** Ceiling (a room's ceiling on / off), **V** Stairs. Click anything built for its settings - a room's size, wall

height and thickness, its colours inside, 90°, Duplicate. **B** paints walls / floors / ceilings / doors / roofs, **E** or **Delete** erases. Everything is saved, undone, exported and sent with the model (the lights go to Blender and Unreal as glTF lights).

(the docker's title bar) fills the whole bitGen window between its title bar and its status bar (2.625.0); it is then ⇲ **Dock** - that or **Esc** puts it back. × beside it closes the docker (2.624.0). **File** has New, Open, Save, Save as, Rename, Import (a project 3D model or a file from this computer), Export, Send, Delete and Close; **→ Image editor** and **→ Timeline** are buttons on the bar.

## Walls on a floor, sloped walls, follow ceilings and roofs (2.624.0)

- **bitGen's theme colours**: the docker, its 3D view's background, grid and selection take the theme's colours (and change with it).
- **Offset from floor edge** (the Room and Wall tools' panel): a room or wall drawn along a floor's (J) edge has its walls' outside face that far in from the edge (0 = on the edge).
- **Drag one wall** (Select, press on a wall of a room): it moves square to itself and the room stretches. The floors' edges show their **snap regions** while you drag; let go in one and the wall's outside face is on the edge (with the offset). A dragged room snaps to a floor's edge too. Shift = no snap.
- **Double-click the top of a wall** = a cut there; drag the cut up / down and the top slopes to it from both corners (a gable end). Click a **top edge** and drag it (or type its ends' heights in the panel) to slope the wall - a corner takes the wall beside it along. A picked cut or edge + **Delete** takes it away.
- A room's **Ceiling**: None, **Flat** or **Follows the walls' slope**. The **Roof** tool's type **Follows the walls' slope** sits on the sloped tops, with an **Eaves width**.
- **Double-click empty space**: everything is deselected and the tool is **Orbit** (Space = Select again).

## Editing faces, edges and corners; doors and windows by hand (2.625.0)

With **Select**:

- **A face**: the panel shows **Extrude** (+ out, - in = a cut into the object) and **Twist**. **Drag the face** to extrude it with the pointer (like Blender); **Ctrl+drag** turns it round its normal - the face just extruded twists its extrusion to match. Type a distance in the Measurements box to change the last extrusion.
- **An edge**: drag it to move it (Shift: one axis). **Shift+click** picks more edges, **Ctrl+click** every edge of the loop round its face. The panel: **Length**, **Extrude edge** (a new face - up, out from its face, along red / green), **Fillet** (radius + pieces; an edge between two faces rounded).
- **A corner**: click and drag it (Shift: one axis; it snaps onto another corner) or type X / Y / Z. Faces bent out of flat are split into triangles.
- **A door or window**: grips on its sides, top and (not a door) bottom - drag them for the width, the height, the elevation; drag a window itself along the wall and up / down. A window's panel has **Elevation (height from floor)**.

## The outline docker, skirting + cornice, walls dragged, room groups (2.639.0)

- **Outline** (the Sketcher's bar) - a docker left of the view listing every object: Room groups, Rooms ▸ Room 1 ▸ Wall 1 … n, Floor 1, Ceiling 1, Skirting 1, Cornice 1, Floor slab 1, Door 1, Window 1 …; free-standing Walls, Roofs, Floors, Stairs, Lights, Furniture, Cameras. A click picks; hides / shows (undo-able, saved with the model).
- **Room groups** - makes one, ⊞ on a room puts it in (or out); a group's hides / shows all its rooms.
- **Skirting and cornice** - new rooms have both; the room's panel switches them, sets their size and colour.
- **Walls** - a dragged wall moves across its own line (the walls beside it stretch or shorten; the floor, ceiling, skirting and cornice follow); **Alt+drag** moves it freely; **Shift+click** picks the whole room.

## Picking, moving and turning a camera (2.641.0)

- A click on a camera picks it: it lights up (no box round it) and shows the **move arrows** - red X, green Y, blue Z.
- **Drag the camera** to move it at its height; **drag an arrow** to move it along that axis only (the blue one lifts / lowers it); 1 cm steps, Shift = free. The arrow under the pointer turns yellow.
- **Double-click the camera** for the **rotate rings** (blue turn, red tilt, green roll - as in 2.633.0); double-click again for the arrows. Its panel has ✥ Move / Rotate too.
- A click on any other object picks that one and lets the camera go; a click just beside a camera's lines picks what is there (they used to catch clicks up to a metre away).

## Each part's own properties; profiles for skirting, cornices, frames and sills (2.640.0)

- **A part picked = its own panel** - click a wall, floor, ceiling, skirting or cornice in the view (or its row in Outline) and the panel shows just that part:
  - – **Wall n** - Length (a rectangle room keeps its shape), Height (only this wall), Thickness (the room's walls), its own **Inside colour** (↺ back to the room's), Shown, the doors / windows in it.
  - – **Floor n** - On, Colour, Level, Floor slab; **Ceiling n** - None / Flat / Follows the walls, Colour, Height.
  - – **Skirting n / Cornice n** - On, **Profile**, Height / Size, Colour, ✎ Profiles…; **Floor slab n** - On.
  - – ⌂ *Room*'s settings goes back to the whole room. **Delete** on a part turns it off (a wall: hidden) - the room stays.
- **Profiles** - a picture dropdown (each profile drawn as its cross-section): 7 skirting (Square, Pencil round, Bullnose, Chamfered, Ogee, Torus, Lamb's tongue), 6 cornices (Square, Cove, Quadrant, Ogee, Stepped, Cove + band), 6 door frames and 6 window frames (Flat, Bullnose, Chamfered, Splayed, Colonial, Lamb's tongue), 5 window sills (Square, Bullnose, Round nosing, Chamfered, With an apron), then **This project**'s own.
  - – Skirting is swept round the room with mitred corners and stops at a door's frame; a cornice runs under the ceiling.
  - – A door's or window's panel: **Door frame** / **Window frame** (an architrave round the opening - a door on both faces, a window on the room's side) and **Window sill** (under the window, reaching back to its frame), None to start, and a Frame / sill colour.
- ✎ **Profiles…** (the dropdown's last row, or the part's button) - the profiles of a kind down the side; draw on the canvas: a click adds a point on the nearest side, drag moves it, Delete / right-click removes it (1 mm grid, Shift = free); type a Width / Height to scale it; **New** copies the one shown. **Save** keeps it in the project (projects/<project>/pushpull/profiles.json) and uses it; a model keeps a copy of every profile it uses.

## Rotate rings, roll, lenses (2.633.0)

- A picked camera or piece of furniture shows three rings: **blue** turns it (yaw), **red** tips it (pitch), **green** rolls it. Drag round a ring: 5° steps, **Shift** for free turning, **Ctrl+Z** takes it back.
- In numbers in its panel: a camera's **Turn (yaw)**, **Tilt (pitch)**, **Roll**; a piece's **Turn (yaw)**, **Pitch**, **Roll**.
- A camera's **Lens**: Fisheye (8 mm), Ultra wide (14 mm), Wide angle (24 mm), 35 mm, 50 mm (normal), 85 mm (portrait), 135 mm, 200 mm (telephoto) or Custom; **Focal length** (mm, full frame) and **Field of view** (°) follow each other. The fisheye gives its widest view (the curve itself isn't drawn). The Camera tool's panel has the same Lens / Focal length / Field of view.
- **Zoom extents** takes the cameras in too.

## Cameras picked, moved, turned; deselecting (2.632.0)

- A camera is drawn over everything - one inside a room (under its ceiling and roof) is picked with a click, not the room. Drag it to move it; **R** turns it 15°, **Shift+R** back (a piece of furniture: R 90°, Shift+R back).

- **Esc** or a **double-click on empty space** deselects everything; with a Build tool going the first Esc deselects and the next goes back to ⬚ Select.
- **Orbit**'s pointer is an orbit cursor (two arrows round a dot), not the hand ( Pan keeps the hand).

### Camera views, open doors and windows, auto roof + floor (2.631.0)

- **View ▾** lists the model's cameras ( Camera 1, …) as they are added, renamed or deleted; pick one for the view from it - its place, its way, its lens (its own glyph out of the way). Changing its turn / tilt / lens in its panel moves the view with it; an orbit, pan or zoom (or a standard view) leaves it.
- A door or window: **Open (%)** and a direction tick - a door swings into the room (**Opens outward**: out), a window's sashes swing out (**Opens inward**: in), a sliding door / window slides a pane (**The other pane slides**).
- The Room tool: **Auto roof** (the Roof tool's type) and **Auto floor** (a 20 cm slab under the walls) for each new room; a room's panel: **Floor slab under the walls** and **Roof** on / off.

### People, the House builder's houses; the House builder is gone (2.630.0)

- **▸ People**: standing, sitting, walking or waving mannequins (the House builder's) - click on a floor; picked: Name, Pose, Height, Turn.
- **File ▸ A house from the House builder…**: a house it saved becomes a Sketcher model - rooms (each floor at its height), doors, windows, furniture, people, cameras, lights, stairs; the not-carried parts (a 3D-model piece, the roof) are named in the status line.
- **The House builder is gone** - its window, its status-bar button and its code. SolidCraft's **Send to Sketcher** replaces its "Send to House builder" (the part comes in as a group).

### Materials, cameras + 360° locations, Furnish (2.629.0)

- ▦ **Materials ▾** (beside the colours): the House builder's materials - brick, stone, concrete, oak / walnut floors, tiles, marble, carpet, grass … with their textures; pick one and paint (B) faces, walls and floors.
- **Z Camera**: click where it stands, click where it looks (eye height + lens in the panel). Picked: **Look through**, **Shot + depth + normal** (three pictures in the Image assets) and **360° location** (a panorama from it becomes a Location - its @tag, the prompt's location). Select drags it; the panel turns / tilts / names it.
- **Furnish** (a room's panel): fills the room with furniture - the LLM picks when one is running, else a room's usual set; optional words ("a reading corner"). Ctrl+Z takes it out.
- The furniture now goes into the .glb / .obj exports too.

### Furniture and the project's 3D models; maximized = alone (2.628.0)

- **A Furniture** (the Build tools): the House builder's furniture library in the Sketcher - pick a **Category** (Living, Dining, Kitchen, Bedroom, Bathroom, Lights, Outside) and a piece, click on a floor to put it there (it stands on the room's floor, with the House builder's materials and textures). **R** turns the next piece 90° (or type degrees). With **Select**: drag a piece, R turns it; its panel has Width / Depth / Height, Turn, Up from the floor, its own colour, Duplicate, Delete. The pieces are saved with the model.
- The **3D models** category lists the project's 3D models (.glb / .obj - SolidCraft's, imported); a click brings one in as a group (move, scale, paint it).
- **Maximize** now closes every other docker (the title bar and the status bar stay); ⇲ **Dock** / Esc opens the same dockers again.
- The House builder's other parts (cameras, shots + depth / normal maps, 360° locations, Furnish, people, floors, materials for faces) come to the Sketcher next; then the House builder goes.

### A real photo of the model; Sketcher layers (2.626.0)

The docker is called **Sketcher** now (it was PushPull; the **Push/Pull** tool keeps its name).

- **With the prompt docker open** (and the image editor not on screen - it has its own Edit link - unless the Sketcher is maximized): the prompt docker goes to **Image** with an **edit model** (Qwen Image Edit, FLUX Kontext, FLUX.2 Klein edit ... - the one picked there when it edits, else the default), an empty prompt gets **create a real photo of the model in view**, and its button reads ✏ **Edit (Sketcher)**. Generate sends the Sketcher's view to that edit model and the photo comes back as a **real image** - an ordinary picture in the project's **Image assets** (and a plain layer in the image editor when it is open). Change the words for another look ("a rainy evening street, cinematic"). 2.627.0: what goes to the edit model is a **clean render** of the view (no outlines, grid or axes; shadows; a daylight sky) as picture 1 and its **depth map** (near white, far black) as picture 2, and the prompt starts with "Convert image 1: Turn this 3D render into a photorealistic photograph of a building: real brick, timber, glass and concrete, natural daylight, soft shadows, no outlines, DSLR photo." + a line saying picture 2 is its depth map (the picture words are the edit model's own - <image1> for Qwen 2.1). Your words are added after it. Closing the Sketcher puts the prompt docker's mode, style and words back.
- **→ Image editor** sends the view as a **Sketcher layer** (named after the model); sent again, that layer is updated instead of a new one. **→ Timeline** puts the model in as a **Sketcher layer** (3D).

## Editing on the timeline: speed, colour, sound, mix and captions (2.406.0)

Select a clip on the timeline canvas; its **Properties** get three folds. Everything is saved with the timeline, the canvas previews it, and ⚙ **Compile** renders it.

### Speed

| control | what it does |
|---|---|
| **Speed %** | 50 = half speed (twice as long on the timeline), 200 = double speed (half as long); 10 – 1000 % |
| **⇄ reverse** | the clip plays backwards |
| **Ramp** | the speed changes along the clip: *slow → fast*, *fast → slow*, *slow middle*, *fast middle* (it replaces Speed %) |
| **Frames** | how slowed frames are made: *repeat* (crisp, steppy), *blend* (neighbours mixed), *optical flow* (smooth; slow to compile) |

The clip's length on the timeline follows its speed. The trim edges still trim the *source*, and keep / cut on a retimed clip keep the right frames. In the canvas a reversed or ramped clip plays silently (a browser cannot play sound backwards); the compile renders its sound at the speed (the pitch is kept).

### Colour

- **Look**: teal & orange, warm film, cool night, bleach bypass, vivid, faded, mono - a starting point for the sliders.
- **Sliders**: exposure (stops), contrast, saturation, temperature (blue ↔ amber), tint (green ↔ magenta), hue.
- **LUT**: any 3D `.cube` LUT (from a camera maker, a colourist or a LUT pack). **LUT** imports one into the project's `luts/` folder; LUTs in the app's own `luts/` folder are offered in every project. **LUT mix** blends it.

The LUT is applied first, then the sliders. The canvas shows the grade with the very table the compile uses (the whole look is baked into one 33-point LUT), so what you see is what you get.

### Sound

On a video clip or a sound clip: **voice clarity** (cuts the rumble, adds a little presence and evens the level), **denoise** (steady background noise: hum, hiss, fans) and **gain** (dB). **before / after** plays a few seconds from the position marker, first as it is, then cleaned up.

### Mix

The timeline's opens the Mix dialog:

- **Roles**: each layer is *voice*, *music* or *sfx* (V1 and video layers start as voice, sound layers as music).
- **Ducking**: the music dips by the chosen amount (3 – 30 dB) whenever a voice speaks, then comes back.
- **Loudness**: the finished movie is measured and evened out to a target: -14 LUFS (YouTube, Spotify), -16 (podcasts, Apple), -23 (broadcast, EBU R128) or -24 (US broadcast). The true peak stays under -1.5 dB.

### Captions

The timeline's opens the Captions dialog.

1. **From speech** transcribes everything that speaks (V1, the video layers, and any sound layer set to voice) on this computer with faster-whisper (*Settings* → *Audio* installs it) and makes the captions - each clip's words placed where the clip sits, its trim and speed included. Each file is transcribed once and remembered. *max chars* sets how long a caption may be; *language* can be left on auto.
2. Edit them: the start and end times, the words, a caption at the position marker, ✕ to remove one, ▶ to jump there.
3. **Style**: font, size (% of the picture's height), colour, bold, an outline or a **box** behind the words (colour and opacity), bottom / middle / top and the margin.
4. **Output**: *burn into the movie* and / or *.srt beside it* (the movie's name with `.srt` - players and YouTube take it as a subtitle track). **⬇ .srt** downloads them now. Untick *on* to keep them without using them.

The canvas draws the captions where the compile burns them.

## Edit tools, colour panel, export queue and exchange (2.407.0)

### Edit tools

The timeline's tool buttons: ▸ **Select** (move, trim - as before), ⇤ **Ripple** (drag an edge: trim it and move everything after it on that layer), ⇹ **Roll** (drag the edge between two touching clips: the cut moves, the total stays), ⇆ **Slip** (drag a clip: it shows other frames of its source, same place and length) and ↔ **Slide** (drag a clip: it moves, the clips either side give and take). A tip beside the pointer shows what the drag will do. Zoom in so each edge has its own handle. A reversed clip can't be edited with these (its edges run backwards).

▯ **Frame** (F over the layers) picks single frames: click a layer's track (on a clip or between clips) and the frame under the pointer on THAT layer is selected - the position marker jumps to it and the frame is outlined on its row. Drag across for several frames, Shift+click to select from the selected frame up to the one clicked, ← / → move the selection a frame (Shift: its end) - exact at any zoom. **Del** (or ⌫) removes the selected frame(s) from that layer and closes the gap (always, whatever the ripple box says); ↶ / Ctrl+Z puts them back; Esc drops the selection. Clips don't move while ▯ Frame is on - press V for ▸ Select.

**A cut clip stays one clip.** When ✂ Cut (or Del on frames) goes through the middle of a clip with ripple on, the part before and the part after the cut are joined into ONE continuous clip again: a video (or a sound) is made into one new file - "<name>-join1.mp4" in the project's Video assets (a sound: "-join1.flac" in Sound) - with the cut part gone, frame-exact; a picture just gets shorter. The cut shows at once and the join follows a moment later (a few seconds for a long video); one ↶ undoes both. Left as two clips (the status line says why): a retimed clip (speed / reverse / ramp), a cut-out, a text / shape / 3D / generated clip, and a cut with ripple off (the gap stays). The preview also loads the next clip a second before it starts, so a cut between two clips no longer flashes black.

**▼ Ranges with Ctrl while it plays.** Highlight a layer, play the preview and TAP Ctrl (press and let go) where a range should start - a ▼ appears in the time ruler at the position marker - and tap Ctrl again where it ends (a second ▼). Playback carries on, so you can mark as many ranges as you like in

one pass; each gets its own colour, with a band on its layer's row. Paused, a Ctrl tap with the pointer on the timeline works the same. Esc forgets a started range. Ctrl taps count whatever is focused (▶, the speed list, a ticked box, the zoom slider) - only a box you type in holds them back - and also while the preview docker's player plays a clip that is on the timeline (the range lands at that moment of the clip on the timeline). Drag a ▼ to move that end (whole frames) - the preview shows the frame under it. A click on a ▼ PICKS its range (Ctrl+click or Shift+click picks more; Esc unpicks); right-click a ▼ removes its range, Del removes the picked ones' markers. The ▼ group in the timeline's menu bar: the count, ✂ **Cut** (the picked ranges - "✂ Cut 2 picked" - or, none picked, every range: out of its layer, ripple as its box says; a clip cut several times becomes one clip again; the selection bar's ✂ Cut also cuts the picked ranges), **Speed up** with 2× / 4× / 8× / 10× (the picked ranges, or all, on video layers play that much faster - like fast-forwarding through a render you don't want to wait for; what follows moves up with ripple) and × (remove the picked markers, or all). Ctrl+Z undoes any of these.

**Hover time and playback speed.** Hovering over the timeline shows the time under the pointer in a small box (timecode · seconds · frame). The speed list beside under the preview plays at 0.125×, 0.25×, 0.5×, 1×, 2×, 4× or 8× (▶ and Space use it; changed while playing it applies at once; it is kept). J / K / L still shuttle.

✂ **to new layer** (the checkbox in the timeline's menu bar, kept): ✂ Cut, Del on frames and Ctrl+K split put the part AFTER the cut on a new layer right above ("<layer> ✂"; V1's goes on the first video layer). The part before stays where it is. One ↶ undoes it.

**J / L cuts** (V1): in a V1 clip's Sound, *J … s early* starts its sound before its picture, *L … s late* runs it on after; the neighbour's own sound is silenced for that stretch.

**Timecode**: HH:MM:SS:FF beside the position. The start (for example 01:00:00:00) and the frame rate are set in Export or ⇄ Exchange.

## Colour panel

The timeline's (or * more...* in a clip's Colour fold) opens the Colour dialog for the selected clip:

- **Wheels**: Lift (shadows), Gamma (mid-tones), Gain (highlights). Drag the puck toward a colour; the slider under each wheel makes that range darker or brighter; double-click a wheel to centre it.
- **Curves**: Master, R, G, B. Click to add a point, drag to move it, double-click to remove it.
- **HSL secondaries**: up to six hue ranges, each shifted, (de)saturated or lightened on its own (bluer skies, warmer skin, calmer greens) - the rest of the picture is untouched.
- **Scopes**: waveform, RGB parade, vectorscope and histogram of the picture at the position marker, as the movie gets it.

All of it is baked into the same colour table as the looks and LUTs, so the canvas and the compile match.

## Export

Add every format the movie should come out in - one compile makes them all, beside `<project>.mp4`:

| format | for |
|---|---|
| MP4 · H.264 | everywhere |
| MP4 · H.265 / HEVC | about half the size; newer players |
| MOV · ProRes 422 HQ | editing and finishing (large) |
| MOV · DNxHR HQ | Avid, Resolve (large) |
| WebM · VP9 | the web |
| GIF | previews (no sound, 15 fps, 640 wide at most) |
| WAV, MP3 | the sound only |

Each has a **size** (the short side), a **reframe** (9:16, 1:1, 4:5, 21:9 - *crop* the middle, *pad* with black or a *blur*: a blurred copy behind), a **frame rate** and a **quality**. The packs add a few at once (*social*, *for editing*, *web*). *make them on every* ⚙ *Compile* keeps the list on; ⚙ **Compile + export** runs it now. **Delivered** lists the files to download. The start timecode is written into MP4 and MOV files; the

captions' `.srt` goes beside each movie.

### ⇄ Exchange

- **Send to another editor**: *Final Cut Pro 7 XML* (opens in DaVinci Resolve, Avid and most other video editors), *CMX3600 EDL* (V1 only - the format holds one picture track) or *OpenTimelineIO*. The clips point at the files in this project. Kept: clips, trims, layers, stills, speed and reverse, opacity, volume, the timecode. Not carried: moves and keyframes, the colour grade, captions, 3D layers.
- **Bring in from another editor**: pick an XML (most editors: *File → Export → Final Cut Pro XML*; Resolve: *Export Timeline → FCP 7 XML*) or an EDL. It opens as a new named timeline; clips are matched by file name in this project's assets, and any that are missing are listed (add them, then import again).

## Edit by transcript, scene cuts, karaoke word fixes (2.408.0)

### Transcript

Select a video or sound clip on the timeline, then press the timeline's . The clip's words appear: its file is transcribed once on this computer (faster-whisper, *Settings → Audio*) and remembered, the same as for Captions.

- **Choose words**: click them, shift-click for a run, or drag across them. Double-click a word to jump there.
- ✂ **Cut them**: the chosen words are taken out and the gap closes; the clips after it on that layer move up.
- ⇥ **Keep only them**: everything but the chosen words is taken out.
- **Remove pauses over … s**: every silence longer than that (the end of the clip included) is cut down to 0.3 s.
- **Remove filler words**: um, uh, erm, hmm and the like (shown in italics) are taken out.
- ↺ **Undo** puts back the last cut. The clip becomes pieces of the same file, and the transcript keeps following them, so you can keep cutting.
- ✂ **Scene cuts** splits the clip wherever its shots change. Lower the *sensitivity* number to find softer changes.

A clip with a changed speed () has to go back to 100 % before it can be cut by words.

### Karaoke: wrong words

- ✎ **Edit lyrics**: if a song has no lyrics on file, the box now shows the words speech-to-text heard - the same words the karaoke showed - so you can correct the wrong ones (or paste the real lyrics). **Generate** saves them and times them against the song again.
- **Words & timing**: every word the overlay will show, with its start and end. ▶ plays a word. Correct a single word or nudge its timing here; **Generate** keeps your corrections for that song (↺ *undo my corrections* removes them). Changing the lyrics later starts again from the new lyrics.
- **Save words** keeps the corrections for the song without making an overlay now.
- **From the StoryBoard**: the ✎ beside Karaoke opens this dialog on the board's song. After **Save words**, every scene that already has a lyrics overlay gets it remade with the corrected words (and the new one replaces the old on the timeline's Karaoke layer).

## Override style for every video model (2.409.0)

With **Override style** ticked at the top of Basic Settings, Basic Settings decide for **every** video model - MiniMax H3, Wan 2.1 / 2.2 and LTX 2.3 / 2.5 - whatever the style says:

| setting | what it does with Override style on |
|---|---|

| | |
|---|---|
| **Steps** | that many steps (0 = the model's own). LTX's 8-step schedule is re-drawn with that many steps on the same curve; its short refine pass stays |
| **CFG** | the guidance (LTX: its CFG guiders, LTX 2.5's video CFG - the audio CFG stays) |
| **Seed** | -1 = random, any number = that seed |
| **Model** | the new *Model (override)* box: any model ComfyUI lists; blank = the style's own. Wan 2.2: the high-noise model (the low-noise one stays). A `.gguf` file is loaded with ComfyUI-GGUF's loader |
| **LoRAs** | the *Temporary LoRAs (video)* are added on top of the style's |

The line under the switch says what it is deciding right now. Unticked, each style's own settings rule, as before. Generate takes the prompt docker's text; the chat's ⬇ To prompt / ▶ buttons and Enhance's **Generate** send theirs the same way (Enhance's Generate used to fail with an LTX style). The scene board's ▶ also uses the model, steps and CFG (its scenes keep their own seed rule from the StoryBoard's ⚙). LTX models are distilled for 8 steps and CFG 1 - more steps or a higher CFG changes the look and takes longer.

## Effects and ◐ adjustment layers (2.409.0)

**Effects** (a video clip's Properties): blur, sharpen, glow, vignette, grain; **crop** (each edge in %, made see-through - the picture stays in place); **key** (a green or blue screen: pick the colour, *match* = how close still keys, *edge* = a soft edge, *spill* = removes the screen's cast from the edges - the layer under it shows through); **stabilise** (steadies a shaky shot in the compile). The canvas shows the key and the crop exactly and the others closely.

◐ **Adjustment layer** (the timeline's toolbar): adds a clip on a new top layer at the position marker. Its Colour (looks, sliders, LUTs, wheels, curves, HSL) and Effects (blur, sharpen, glow, vignette, grain) work on everything under it, only while it is on the timeline. Trim, move and fade it like a picture; its opacity mixes the adjustment in.

## Karaoke: word nudges, the line under the marker (2.433.0)

In Karaoke ▸ **Words & timing** every word has ◀ ▶ (earlier / later) - the word's start and end move together:

| | moves | by |
|---|---|---|
| click | that word | the **nudge** (0.05 s) |
| **Shift**+click | that word | the **larger nudge** (0.25 s) |
| **Ctrl**+click (⌘ on a Mac) | that word **and every word after it** | the nudge |
| **Shift+Ctrl**+click | that word and every word after it | the larger nudge |

The two amounts are the boxes above the list (**Nudge** / **Shift**) - kept for next time. Nothing moves before 0 s: a move that would is cut short for every word it moves, so their spacing stays (the note says by how much they moved). Generate (or Save words) keeps the new times for the song.

**The line under the marker** is lit - every word of the line being sung where the preview marker is (or the next line when it starts within 1.5 s); the word being sung is lit brighter, and on canvas draws the same line.

## Karaoke and Tools as dockers beside the canvas (2.410.0)

Both are **dockers** now, not dialogs. Drag one by its titlebar to the preview canvas's **left or right edge** (that side lights up) and let go - or click ◧ / ◨ in its titlebar. Docked, it is as tall as the canvas and the canvas makes room; drag the column's inner edge to make it wider. Drag the titlebar away (or click the lit ◧ / ◨) and it floats again. The first time Karaoke opens it docks on the right (when the canvas is wide enough), so the song can play while its words are corrected:

- in **Words & timing** the word being sung is lit and the list follows the preview;

- a word's **time** is a button that puts the preview on it;
- beside a start / an end sets it to where the preview is;
- **on canvas** draws the corrected words over the preview (the canvas only, never the movie).

**Space** pauses the preview anywhere in the app - the canvas, the live preview or a video in the Preview docker - unless you are typing in a box. Paused, it plays again.

## ⌨ Timeline keys, markers, In / Out export, frames (2.410.0)

With the pointer over the timeline's **layers** (the canvas keeps its own keys):

| Key | Does |
|---|---|
| V / B / N / Y / U / F | ▸ Select / ⇤ Ripple / ⇹ Roll / ⇆ Slip / ↔ Slide / ▯ Frame |
| Del / ⌫ | (▯ Frame) remove the selected frame(s) from their layer - the gap closes |
| Ctrl (tap) | while it plays: ▼ a range starts at the position marker on the highlighted layer - tap again where it ends |
| I / O | In / Out of the ruler selection at the position marker |
| Ctrl+K | split at the position marker (the selected clip, else the highlighted layer's) |
| ↑ / ↓ | previous / next edit point |
| Home / End | the start / the end |
| M | a marker (on a marker: its name, colour, comment) |
| Shift+M / Alt+M | next / previous marker |
| Ctrl+Shift+E | the frame at the position marker as a PNG (over the canvas too) |

**Markers** are flags on the ruler: click = go there, drag = move, double-click = name / colour / comment / . ✂ Scene cuts **as markers** drops one at every shot change instead of cutting. They travel in ⇄ Exchange (XML `<marker>`, EDL `* LOC:`, OTIO markers) both ways.

Export's **Range**: *the whole movie* or *In / Out only* - every format then holds just the ruler selection (`<project>_<format>_io.<ext>`), its timecode starts where the part starts, its .srt is cut to the part. **Export frame** saves the picture at the position marker as `<project>_frame_HHhMMmSSsFF.png` beside the movies.

## Text effect presets (2.411.0)

A text layer's Properties (timeline) and the image editor's Type tool / text Properties have **Preset**: text effects made from layered PSD text effects - **Arena Gold 3D** and **Trend Candy 3D** come with the app - plus the classic looks. The words are drawn with the preset **live as you type** (a quick picture while they change, the sharp one when you stop); ⚙ Compile always uses the sharp one. **Import PSD text effects or a zip…** turns your own PSD (the word as a smart object with layer effects) into a preset; backgrounds and decorations are left out. Pick several PSDs at once, or a **zip** of them (a text effect pack): every .psd / .psb in it - in any folder - becomes a preset, a bitGen preset .json in it is added as it is, and the fonts it carries (.ttf / .otf) go into the studio's own font folder (`fonts\` in the install folder - every font list then shows them). Previews, read-me files and macOS's `__MACOSX` copies are left out; a PSD that is not a text effect is named in the line that says what went in, the rest still go in. Fonts are not inside a PSD itself: the note under Preset names the one it used. From the command line: `node scripts/textfx_build.js <file.psd> "<Name>"` writes a built-in preset to `textfx/`.

## J / K / L, AV1, 10-bit, the graphics card (2.411.0)

| Key (anywhere in the timeline docker) | Does |
|---|---|
| L | play forwards; again 2×, 4×, 8× |
| J | play backwards; again 2×, 4×, 8× (stops at the start) |
| K | stop |
| K + L / K + J | one frame on / back (hold K) |

Export adds **MP4 · AV1** and **MP4 · H.265 10-bit** (and the *smallest* pack). **use the graphics card's encoder when it has one** makes H.264 / H.265 / AV1 with NVENC, Quick Sync or AMF when one works here, else the software encoder - the log says which.

## Smaller editing jobs (2.412.0)

- **Drop-frame timecode** (29.97 / 59.94): Export / ⇄ Exchange → *drop-frame*; HH:MM:SS;FF in the files, XML (DF), EDL (FCM: DROP FRAME) and the timeline readout.
- **Marker ranges**: the marker editor's *length* (or ⟦ ⟧ = the ruler's In / Out); drag the band's end. **Clip markers**: Ctrl+Shift+M on the selected clip - they stay on their frame through trims, slips, speed and reverse.
- ◎ **Track targets**: Ctrl+K with no clip selected splits every targeted layer.
- **Linked sound**: Properties → Sound → as its own clip; linked selection (menu bar) moves the pair together; Unlink / ↩ Sound back.
- **J / L cuts** on V2+ layers and on retimed clips.
- **EQ / multiband / reverb** in a clip's Sound section.
- **H/H and H/S curves** in the colour panel.
- **Effect keyframes**: ◆ key here, then move the sliders elsewhere on the clip.
- **ProRes 4444 (alpha)** (the *overlay* pack), **H.264 10-bit**, **VAAPI** among the graphics-card encoders.

## Partly-done editing items finished (2.413.0)

- Ripple / roll / slip / slide, the edge handles and Ctrl+K on **reversed** and **ramped** clips, frame-exact.
- **Edit by transcript** and **scene cuts** on retimed clips.
- fit **follow** = smart reframe (the crop follows faces, people, what stands out).
- **Stabilise**: *smooth* and *locked*; the compile measures the shake (vidstab); the canvas shows a steady preview.
- ⇄ XML speed in the usual editors' convention (speed-adjusted in / out), verified with OpenTimelineIO.
- Text presets: the bevel's profile contour kept (re-import a PSD made before 2.413 for it).

## Nested sequences, the fuller XML, FCPXML, whole-sequence transcripts (2.414.0)

- **Nest** (the timeline's menu bar): pick another named timeline - it is compiled into ONE clip on a new layer " name" at the position marker. Trim it, move it, grade it like any clip. When that timeline is saved again the clip's badge says **↻ out of date**: Properties → **↻ Re-render** (the clip keeps its place and trim) or **Open** (switch to it to edit). A timeline cannot hold itself, nor one that already uses it.
- ⇄ **The XML carries more**: position / scale / rotation (Basic Motion) and opacity / volume, each with its ◆ keyframes; the captions as text titles; the **grade** - each graded clip's whole look is baked into

a .cube beside the export (`exports/<name>_luts/`), named in the clip's comment; apply it as the clip's input LUT (Resolve: a node's LUT; Final Cut: Custom LUT). bitGen reads its own grade back exactly.

- ⇄ **FCPXML 1.10** for Final Cut Pro X, both ways: V1 is the primary storyline, the other layers connected lanes, sound layers below; speed, moves, keyframes, markers, captions, the start timecode.
- **Transcript scope**: *this clip*, *its whole layer* or *the whole sequence* (V1, the video layers and the voice sound layers as one text, in the order they play). A cut takes the words out of whichever clip says them; for the whole sequence every layer after it moves up too, so the music and the pictures stay in step. ↺ undoes it.

## Track mixer, distort effects, the transitions library, colour match (2.415.0)

- **Mixer** (the timeline's menu bar): a strip per track - V1, every video layer, every sound layer - and the **master**: a fader (−∞ .. +6 dB), **pan** (L 100 .. C .. R 100), **M**ute, **S**olo and a live **level meter** (left / right, the peak held) while the canvas plays. Double-click a fader for 0 dB, a pan for the centre. The movie pans and mixes the same way (the balance law: panned right, the left side is turned down).
- **Distort** in a clip's Effects: **lens** (right = barrel / fisheye, left = pincushion), **mirror** (left → right, top → bottom, four ways), **warp** (*wave* - a sideways ripple, its size and speed; *twirl* - a swirl at the middle). The canvas shows exactly what the movie gets.
- **Transitions**: 59 now (wipes to the corners, soft wipes, covers / reveals, squeezes, irises, barn doors, slices, wind, zoom …). A video or picture layer's **entry / exit** is drawn as its shape (a wipe, a slide, an iris) - on the canvas and in the movie - instead of always a dissolve.
- **Match**: pick another clip on the timeline - this clip's R / G / B curves are set so its tones match that clip's frame (each clip's frame at the position marker when it is there, else its middle). Strength 10 .. 100 %. The curves are ordinary curves: tweak them, or reset to undo.

## Masks + tracking, multi-camera, proxies (2.416.0)

- ◯ **Mask (power window)** in the Colour panel: an *ellipse* or a *box* - centre, size, rotation, **feather** (the soft edge), **invert**. The clip's grade and the effects after it (blur, glow, vignette, distort …) then apply only inside it (or only outside). Its outline shows on the canvas while the panel is open. Works on adjustment layers too.
- **Track**: put the position marker where the mask sits on the thing, press - the mask follows it to the clip's end (the canvas and the movie). If it loses it (it left the frame) it holds there and says so; ✕ **track** removes it. Moving a tracked mask's centre shifts the whole track.
- **Multi-camera**: put every angle of the same moment on the timeline, open , tick them (the first is the reference) and pick whose sound plays → ⇆ **Sync by sound**. V1 becomes the program; play it and press **1 - 9** (or click an angle in the grid) to cut to that angle there. ⇲ **Flatten** keeps the cuts as ordinary clips.
- **Proxies**: heavy footage (over 1920 wide, HEVC / ProRes / DNx, over 40 Mbit/s) is listed; **Make for the heavy ones**, then tick **play proxies on the canvas**. The movie, the deliverables and the exchange files still use the originals.

## HDR, AAF, the sound of reversed clips, motion graphics templates (2.417.0)

- **HDR**: the 10-bit presets (H.265 10-bit, AV1, ProRes 422 HQ, ProRes 4444) have a **colour**: *SDR* (as the master), **HDR10** (PQ, BT.2020, with HDR10 metadata), **HLG** (broadcast HDR) or **Rec.2020 SDR** (wide gamut). The master's white lands at 203 nits (the HDR reference white), so it looks as graded on an HDR screen. The **HDR pack** adds an HDR10 and an HLG file in one go. An **HDR clip** (a phone's HDR video) on the timeline is tone-mapped into the movie - no more washed-out grey.
- ⇄ **AAF** (Exchange → *AAF - Avid Media Composer, Pro Tools*): the cut as an .aaf - every video layer a picture track, the sound as mono tracks, gaps, the start timecode; the media is linked where it is. Avid / Pro Tools get the cut, not opacity, volume, moves or the grade (use the FCP 7 XML for Resolve and other editors). WebM / MP3 media is linked as it is - Avid may want it as .mov / .mxf. Needs `pip install pyaaf2` (requirements.txt).
- **Reversed / ramped clips are heard on the canvas**: their sound is rendered once (the movie's own retime) as soon as the position marker sits on them, then plays in step with the picture.
- **Motion graphics templates** (the menu bar): pick a template, fill in its texts, **Insert at the playhead** - its layers land on the timeline sized to your picture, with their moves and keyframes. Built in: *Lower third*, *Title card*, *End card*, *Corner tag*. **Save as a template**: tick the picture / text layers (the ones under the position marker are ticked), name the texts, save - every project sees it (★ in the list; deletes a saved one).

## Real-time playback: the render bar, ⚡ Render, , playback resolution (2.418.0)

- **The render bar** (a thin line under the ruler): no line = the canvas draws that stretch live in real time; **yellow** = it may drop frames; **red** = too heavy to draw live (many layers, grades, blurs / glows, masks, reversed or ramped clips, 3D, adjustment layers - hover it for why) or it **did** drop frames while playing; **green** = rendered.
- ⚡ **Render** (the menu bar): the timeline is compiled once (the real movie, into the project's cache) and every stretch turns green; while the canvas **plays** over a green stretch it shows that render - the exact movie at full speed. An edit turns only the stretch it touches red / yellow again; ⚡ again to refresh. **Shift+click** ⚡ turns the previews off / on.
- beside ▶: how many frames were drawn late since ▶ (green 0 = smooth).
- **Full / ½ / ¼** beside it: the playback resolution - the clips' grades, effects and masks are worked on a half / quarter size picture while playing (paused frames stay full size).

## One prompt docker, ⊖ the negative prompt docker (2.419.0)

- **One prompt docker for every tool**: the image editor's AI, the timeline's Fill, a path layer's subject, AI scene, the 3DREAL look, the character creator, an environment and a VR world no longer have prompt boxes of their own - they use what is in the **prompt docker** (P). Where the box was, a line shows the text the tool will use; click it to edit in the prompt docker. With the prompt docker empty a tool keeps its own default. (A scene's own prompt, the scene editor, lyrics, speech and captions stay where they are - they are that scene's / song's text.)
- ⊖ **Negative prompt docker** - press **2** (not while typing; while the multi-camera dialog is open 1 - 9 cut cameras) or **Negative** in the statusbar. Write what the picture must NOT have. It goes with every image and video generation and the AI edits; empty = the style's own negative. Its status line says whether the selected model uses one: SDXL / Pony / Illustrious (and ComfyUI image styles at cfg > 1), LTX, Wan 2.1 / 2.2 and MiniMax H3 at cfg > 1 do; FLUX / Qwen / Z-Image (distilled), music and speech do not. **↺ style** puts the style's own negative there to edit.
- **The LLM's negatives land there**: a reply's "Negative: …" line no longer goes into the prompt - ⬇ To prompt, a ``` ``image / ``` ``video reply and Generate itself move it into the ⊖ docker (untick *put the LLM's "Negative:" lines here* to keep yours). With an LTX or Wan video style selected the LLM now writes for THAT model (with a Negative line).

## AI inside the timeline (2.420.0)

in the timeline's menu bar. Every render takes its words from the **prompt docker** and its negative from the ⊖ **negative docker**, with the selected video style (MiniMax H3, Wan, or LTX). The dialog shows both before you press.

- **New take**: select a video clip, press - it is rendered again in its own slot (same start, length, place, keyframes); "start from its first frame" keeps the shot's opening picture. The old file stays a take: ⇆ switches.
- ⇥ **Extend**: N more seconds continuing from the clip's last frame, right after it; the clips after it move on.
- **B-roll**: put the position marker in an empty stretch of V1 → a clip fills it (optionally continuing from the clip before); or select a range on the ruler and choose *a cutaway* → a new "B-roll" layer over it, its sound off so V1's sound carries on.
- ✂ **Cut to the beat**: pick the song (a sound layer's clip or V1), ♪ **Find the beats** (its tempo is shown), then ⚑ **Beat markers** (every N beats) or ✂ **Cut the selected clip on the beats** (pieces of the same file).

## The GPU compositor (2.420.0)

While the canvas **plays**, the layers are put together on the graphics card: each clip's picture is a texture drawn in one pass (moved, scaled, turned, its opacity), and a clip that only has a grade is graded in that same pass. A paused frame, a layer's wipe and an adjustment layer use the 2D path as before. **GPU** beside switches it off / on.

## Wan 2.1 and Wan 2.2

Pick **Wan 2.1** or **Wan 2.2** in the Basic Settings video style list. Then render from the prompt docker as usual.

| Mode | What Wan does |
|---|---|
| **Text** | text to video |
| **F/L**, one picture | the picture is the first frame (image to video) |
| **F/L**, two pictures | first frame and last frame |
| **Ref** | the first picture is the character (Wan VACE). Without a VACE model, the picture becomes the first frame instead, and the log says so |

- **Models:** bitGen builds the Wan graph itself from ComfyUI's own Wan nodes, so no workflow file is needed. It picks the model file ComfyUI has for each mode by name (t2v, i2v 480p / 720p, flf2v, vace). For Wan 2.2 it picks the high-noise + low-noise pair. If a file is missing, the job tells you its name. Download from Comfy-Org's *Wan_2.1_ComfyUI_repackaged* / *Wan_2.2_ComfyUI_Repackaged* into `ComfyUI/models/diffusion_models`, with `umt5_xxl_fp8_e4m3fn_scaled.safetensors` (text_encoders), `wan_2.1_vae.safetensors` (vae) and, for Wan 2.1 picture modes, `clip_vision_h.safetensors` (clip_vision).
- **Forcing a file:** set a model in the style's phase (Settings → Video styles) to use that file whenever it fits the mode.
- **Steps and CFG:** blank uses Wan's own (2.1: 30 steps, cfg 6; 2.2: 20 steps, cfg 3.5). With a Lightning, lightx2v or CausVid LoRA it uses 4 steps, cfg 1.
- **Sound:** Wan makes no sound. The reference dock's first sound is laid under the clip.
- **Frame rate:** Wan renders 16 fps. The clip is motion-interpolated to 24 fps so it joins your other clips smoothly. Up to 10 s per clip; Wan is trained on 5 s, and longer clips can drift.

## VR World (a performer inside a 360° / 180° picture)

The StoryBoard's **VR World** button opens the dialog.

1. **World:** choose a 360° or 180° picture, or drop one or an Image asset. The type is read from the name (`_360`, `_360_TB`, `_360_LR`, `_180_LR`, `SBS`, `TB`...) or the shape. Check the **Type** if the dialog says so.
2. **Aim:** click the panorama where the performer stands. **View °** sets how wide the camera is; smaller makes the performer bigger and sharper. **Shape** and **Size** set the render (Size 0 = matched to the picture's sharpness). *What the camera sees* shows the view.
3. **The performer:** add up to three pictures, a sound (song or voice) with its start, and a prompt.
4. **Engine:**
   - **MiniMax H3** makes its own sound and speech.
   - **H3 + the sound lip-synced** uses MMH3_NativeAudio_MV, so the performer sings or speaks your sound.
   - Any **Wan** style lays your sound under the clip.
5. ✎ **First frame** (optional, recommended): the image-edit style (Qwen Image 2.1 edit) puts the performer into the view. The render then starts on that frame, so the place stays the place. Without it the render starts on the empty view and the prompt brings the performer in.
6. ▶ **Render VR.**

The finished `…_vrworld_360` / `_360_TB` / `_360_LR` / `_180_LR` mp4 lands in the gallery with VR metadata. Copy it to your headset and open it in its player (DeoVR, Skybox, Meta Quest TV...).

Good to know:

- **Only the performer moves.** The area around the performer is animated; the rest of the world is your still picture.
- **Lock the background:** outside the performer, both eyes show the picture itself. This removes any shimmer or seam, but also loses shadows on the floor.
- **Stereo depth:** the place keeps its own depth (measured from the picture's two eyes). The performer has no second eye, so they stand as a flat card at the depth of the ground at their feet. This looks right from a couple of metres away.
- **Best results:** a static camera (added to the prompt for you), the performer framed with some margin, a View ° of 50–80, and a ✎ first frame.

## Character swap

Put a new person into existing footage — the performance, camera, background and **the original sound** stay; only the character changes.

**From the Prompt docker**




*Swap mode*

1. Basic Settings → **SWAP**.
2. References → **Image**: one picture of the new character (`<Picture 1>` — H3's name for it; a clear, full-body picture works best).
3. References → **Video**: the footage (the first video is used — trim it to the part you want).
4. Optional: **Swap from** / **Swap length** (seconds) and extra direction in the prompt box (the swap instructions always ride; the box may stay empty).
5. **GENERATE**.

**Getting the new character to stick** (2.334.0)

- Swap **4–5 second pieces**. The swap dialog's ✂ Auto segment cuts 5 s pieces by default; one long 15 s run tends to slide back to the original performer after a couple of seconds.
- Install the **H3 Character Swap LoRA** (Setup → Models → Video extras, or put `h3_character_swap_pro4500_1000.safetensors` anywhere under ComfyUI's `models/loras` folder and restart ComfyUI). The swap adds it to the workflow automatically when ComfyUI has it, and the job log says so ("swap LoRA: … stacked"). Without it H3 alone rarely holds the new character.
- **Quality** (the swap dialog's menubar, 2.336.0): **Full** (default — no turbo LoRA, 20 steps, ComfyUI's own H3 reference settings), **Best** (28 steps — how the swap LoRA was tested) or **Fast** (the turbo LoRA at 4 steps — quickest, weakest swap). Full and Best take roughly 5–7× longer than Fast. The job log names the quality it used.
- The picture goes to H3 at full detail (`ref_image_size` max) and the prompt names it `<Picture 1>`, H3's own tag.

**On a rendered scene**




*Swap on a scene*

Select the scene, press ⇄ on the take bar, pick a cast sheet (or choose a picture file), optionally a window and some direction, then ⇄ **Swap**. The result becomes the scene's next take — the old one stays in your assets.

One run covers up to about 15 seconds; a longer window is cut there and the log says so (swap the rest with a later start).

**A whole movie — the Swap dialog**

The StoryBoard's ⇄ **Swap** button opens the character swap dialog, for footage longer than one run (about 15 s):

- **Left** — click the box to choose the picture of the new character (or drop a picture / an Image asset on it); the prompt box below, with ✎ **Write prompt** under it (see next).
- **Middle** — the preview plays only the box. The menubar under it: **Load video** (or drop a Video asset on the preview), **Start**, **Duration** (the box), **Max** (the longest segment), ✂ **Auto segment** (cuts the *whole* video into back-to-back segments of Max length), ⇄ **Swap** (the box) and ⇄ **Swap all** (every segment not done yet). Below it the filmstrip with the box and a coloured band per segment; the chips under it select a segment, ▶ swaps just that one, × drops it.
- **Right** — the result preview with **Save** (a copy to the Video assets), ↻ **Retry** (same window, new seed), **Upscale** (same window and seed with the StoryBoard ⚙ upscaler) and **Compile**. Finished segments land in `projects/<name>/vidTemp`; ✓ **Keep** moves one to `projects/<name>/vidSwap`; Compile joins the ticked kept segments in time order into one video in the Video assets (`<video>_swapped.mp4`).

**Engine: LTX Ripple** (2.339.0) — the dialog's **Engine** dropdown switches between **MiniMax H3** (the swap above) and **LTX Ripple**. Ripple works in two steps per segment:

1. ✎ **First frame.** Qwen Image 2.1 puts the new character into the frame at the segment's start: same pose, framing, light and background. A card per segment appears under the segment chips. The first ⇄ **Swap** (or ✎ **First frames** in the menubar) makes them. On each card:
   - – ✎ redoes it.
   - – opens it in the Image editor. The dialog closes; touch it up and **Save**, then reopen ⇄ and press (the picture you saved last in the Image assets).
   - – uses any picture file.
   - – × removes it.
2. **The render.** By default the segment renders as soon as its first frame is made, so one ⇄ **Swap** does both steps (2.343.0). To check or touch up the first frames first, untick ⚙ → ▶ **render as soon as the ✎ first frame is made**, then press ⇄ **Swap** again when you're happy. The segment

renders through Tim's own workflow, **LTX_Ripple_FFAF_Edit_v11** (2.342.0; it ships in the full zip's `comfy_workflows` folder, together with its API version). It carries your first-frame edit through the clip, keeping the motion, timing and camera of the original.

The take is trimmed to the segment exactly and gets the original sound, so ✓ Keep and Compile work as with H3. (Tim's workflow puts the edited still at frame 0; the app renders one frame more and drops it, so the take lines up with the sound.)

**Several first frames** (2.348.0): **✎×N** in the menubar sets how many first frames each ✎ makes (1-4, a new seed each). Every one is kept on the segment's card as a small strip: **click** one to use it, **double-click** to see it big. × removes the one in use. With ✎×2 or more, ⇄ Swap makes the frames and waits for you to pick before rendering.

✎ **First frames** (2.349.0) always makes another ✎×N first frames for the segment the box is on - if the box isn't on a segment yet, it becomes one first. ⇄ Swap makes a first frame only for a segment that has none, and otherwise renders from the one you picked. A segment only has a card while it has first frames: × on its last one removes the card and the others move up.

If a render comes back **all black**, the segment fails with that reason instead of saving a black video (retry with a new seed; if it stays black, restart ComfyUI).

**Looking at what was made** (2.347.0): double-click a ✎ first-frame picture, or a finished segment in the Finished / Kept lists, and it opens in the big preview in the middle (a single click on a segment makes it the Result, so Save and ↻ Retry act on it). × **back to the video** (top left of the preview), Esc, or touching the box goes back to the video you are swapping.

⚙ **Settings** (the icon beside Load video, 2.342.0):

- **Video size:** "from the video" (its aspect at 768 on the short side, in multiples of 32), or your own width × height ( from video fills it).
- **Duration:** the segment length (the same as **Max**; ✂ Auto segment cuts the video into these).
- **Steps** (LTX Ripple; 8 is Tim's workflow) and the **Ripple strength** (1.35).
- **LoRAs:** Add LoRA, the same LoRA rows as Basic Settings. They go into the Ripple render after the Ripple LoRA.
- **Seed:** Random, or Fixed with its number ( picks one). A fixed seed also holds for ↻ Retry.
- **LTX Ripple: ▶ render as soon as the ✎ first frame is made** (on by default, 2.343.0).

The app matches the model files a Ripple or Viggle workflow names to the ones your ComfyUI lists (the same file in a subfolder, or the closest file of the same kind), and says so in the job log (2.345.0). Loading a video that doesn't look like VR switches VR off.

If a segment's render fails, its row says why (the worker's own words, for example a missing node pack or LoRA), and the message line under the menubar announces it.

The size and seed apply to MiniMax H3 too; H3's steps are its **Quality**.

Ripple needs the LTX 2.5 models, `LTX25_Ripple_v11.safetensors` in ComfyUI's `models/loras`, the conv video VAE, and the node packs **ComfyUI-LTXVideo** and **RES4LYF** besides KJNodes and VideoHelperSuite (*Settings → Models → Model catalog*; the packs in Setup). A missing node is named, with its pack, when the render starts.

**Engine: Viggle (H3)** (2.344.0) — Viggle-Animate, a MiniMax H3 finetune made for character replacement. It works exactly like LTX Ripple: each segment gets its ✎ first frame (the character repainted into the segment's first frame by Qwen Image 2.1), and Viggle carries that frame through the clip, keeping the motion, timing and camera. The workflow is Tim's upload, `viggle_animate_h3_api.json` (in the full zip's `comfy_workflows` folder).

- **Size:** "from the video" is the video's aspect at **480** on the short side (Viggle's own canvas is 480 × 832); set your own in ⚙.
- **Viggle steps** (⚙): **3** is the fast DMD schedule the workflow uses ("a 3 step Viggle Animate"); 5 and 7 are its slower, finer presets.
- **Viggle DMD** (⚙): the DMD LoRA's strength (1).

- **Speed patches** (⚙, off by default): the workflow's Sol-Attn attention patch and its fp16 accumulation. Both are faster when they work, but Sol-Attn crashed ComfyUI in a real test and fp16 accumulation can turn a take black, so the app leaves them off unless you tick the box.
- **Safe mode** (⚙, 2.350.0): renders with everything that can make a black take switched off. That means no speed patches, no fp16 accumulation, ComfyUI's own attention instead of the workflow's attention backend, and the fp16 H3 VAE instead of the int8 one when you have both. It is slower.
- **A black take:** when a Viggle take comes back all black, the app renders it once more in safe mode with the same seed. If that works, the take is filed as done, the line says , and ⚙ safe mode stays on for the next renders (untick it to try the fast settings again). If it is black in safe mode too, the row says so: then it is the model files or ComfyUI itself. Restart ComfyUI, update it and its custom nodes, and check that the model downloads finished.
- ⚙ LoRAs are added after the DMD LoRA. The Direction box is not used (Viggle has a fixed text conditioning).
- The take is every frame of the segment with the original sound.
- **Frame counts** (2.351.0): MiniMax H3 only renders 17 × n + 5 frames, at least 124 (about 5.2 s) and at most 362 (15.08 s). A shorter or odd-length segment is rendered at the next valid count and trimmed back afterwards. Before 2.351.0 the segment's own count (for example 120 or 48) was sent, which the H3 video VAE cannot encode. That was the likely cause of the black takes.

**Engine: Viggle (native)** (2.351.0; its own resident engine since 2.352.0) is the same Viggle-Animate model run by bitGen's own engine, with no ComfyUI graph. It is optional: ComfyUI stays the engine for everything else, and the plain **Viggle (H3)** engine above works without it. It uses Viggle's frozen prompt embedding, so no text encoder is needed, and renders 4 steps (3 passes) at flow shift 3, Viggle's own settings.

- **Install:** ⚙ → *Viggle native* → **Install**. It builds its own Python environment (`venvs/native`) and downloads only what is still missing.
- **Use my ComfyUI files:** the engine reads only each file's header and uses your ComfyUI Viggle model, its DMD LoRA and the H3 VAE when it can (bf16, int8, int8-ConvRot or fp8; nvfp4 cannot be read). The ⚙ block lists where each part comes from: your file by name, "ComfyUI file found - to use it", or missing. Only what is still missing is downloaded.
- **Memory** (2.352.0): the 2.351 engine loaded the 66 GB model in full precision *and* a pinned copy, more RAM than a 128 GB machine has, so the render sat at "no steps started". The model now stays packed as int8 in RAM (about half the size). Each block is unpacked on the GPU just before it runs, while the next one is already being copied (Wan2GP's technique, written from scratch). A small local server keeps the model loaded between segments, so only the first render of a session pays the load, and it hands the RAM and GPU back when a ComfyUI job starts. The log shows the load in steps ("packing the weights N%").
- **Installed on start** (2.353.0): every start checks whether Viggle (native) is installed and records it in `components.txt` in the install folder. A 0 starts the install straight away (follow it in the queue). The install reads the model files your ComfyUI workflows name (`viggle_animate_h3_api.json`, then the H3_Viggle and other workflows): the Viggle model, its DMD LoRA and the H3 video and audio VAEs. When those files are in ComfyUI's model folders they are used, not downloaded. Once the Python environment is built, each one is checked; only a file the engine cannot read is downloaded (one extra install, and the DMD LoRA is now its own 2.5 GB download). The rest is small: the configs and Viggle's prompt embedding.
- **`components.txt`** (2.355.0): `viggle native=0` installs it on the next start, `1` means it is installed (nothing happens), `2` means do not install it. The setup wizard writes 0 when you tick **Viggle (native)** and 2 when you don't; the box shows the download size. A 2 can still be installed with ⚙ → Viggle native → Install, and becomes 1 once it is installed.
- **Native steps / shift** (⚙): 4 and 3. More steps are not better for this distilled model.
- The ✎ first frames are still made by Qwen Image in ComfyUI. The native render itself does not need ComfyUI running.
- ⚙ LoRAs and the ComfyUI speed / safe-mode switches do not apply to the native engine.

- A take is 5 to 14.4 s (124 to 345 frames): a shorter segment is rendered at 124 frames and trimmed back.

Viggle needs the node pack **ComfyUI-Viggle-Animate-H3** (Setup), the Viggle model (`minimax_h3_ref2va_viggle_pruned_int8_convrot.safetensors`, 21 GB, in `models/diffusion_models`), the DMD LoRA (`viggle_animate_dmd_lora_r64.safetensors`, `models/loras`), the text conditioning (`fixed_embed_fwd_anyframe.safetensors`, `models/text_cond`) and the MiniMax H3 video VAE (either the int8 or the fp16 one). All of them are in *Settings* → *Models* → *Model catalog* under **Video - Viggle-Animate**. The workflow's speed patches (Sol-Attn, Chunk FeedForward) are used when your ComfyUI has them and skipped when it doesn't.

Some limits:

- **Quality** and **Upscale** are H3-only (not for Ripple or Viggle takes). For a bigger Ripple take, raise the size in ⚙ and ↻ **Retry**.
- VR is not supported on Ripple or Viggle.
- The Direction box's plain words ride along (e.g. "rain on her coat"); an H3 prompt with `<Video 1>` tags is ignored.

✎ **Write prompt** (2.335.0) — the vision model looks at the new character's picture and at the video in the middle of the box, and the LLM (the one picked under the Prompt docker's prompt) writes a swap prompt into the box: who to replace ("the man in the purple shirt"), the character's face, hair, outfit and art style, keep the motion, keep everything else. Anything already in the box rides along as your wishes ("keep his red cap", "photoreal"), so type a wish first and press it. It takes about a minute (the two models load in turn). Edit the result freely. A prompt that names both `<Video 1>` and `<Picture 1>` is sent as the WHOLE prompt; plain words are added under the built-in swap instructions instead. Without a vision model the LLM still writes it (the dialog says the picture was not described). The rules the LLM follows are the `minimax_h3_swap` guide in `lib/promptGuides.json` — copy it into `styles/prompt-guides.json` to change them.

Segments are cut on H3's frame grid so they join without a gap; the last fraction of a second that doesn't fill a grid step is left unswapped (the dialog says how much). Every segment is its own job in the queue, so you can close the dialog while they render.

**VR video (360° and 180° stereo)**

Set **VR** on the line under the video menubar: *360° mono*, *360° stereo (top-bottom)* or *180° stereo (side by side)*. A file whose name says so (`_360_TB`, `_180_LR`, `_360` …) switches it on by itself.

- The swap never renders the whole sphere. It renders a **virtual camera** aimed at the person: click the person in the preview (or type **Yaw** / **Pitch**), set **View** (how wide, in degrees) and **Shape** (3:4 or 9:16 for a standing person). **View** shows exactly what the swap will see — frame the person with a little room around them. A narrower view is sharper.
- For stereo, only the left eye is swapped; the right eye is built from it through the depth of your original footage, so both eyes show the same character at the right distance.
- The swapped view goes back into the untouched full-resolution frame with a soft edge. The result keeps the VR layout and size, is H.265 above 4K, is named with the players' suffix and carries VR (spherical) metadata. Output is 24 fps — the model's frame rate.
- Stereo needs `numpy` and `opencv-python-headless` in the app's Python (`start.bat` installs them).

**Loading long movies:** there is no length limit. Load video opens the app's file dialog and brings the file in *by path* (a hard link or a copy — nothing is uploaded through the page). If the player cannot show a movie (H.265 / 8K), the dialog makes a small preview copy; the swap always uses the original.

**The swap style — `mmh3_chr_swap`**

Swaps render through the video style **mmh3_chr_swap** (Settings → Video styles; *Used for: Character swap*, the swap workflow in its ref2va slot). Picking it in the prompt bar's style dropdown switches to Swap mode. Edit it like any video style — a different H3 model, load precision, text encoder, VAE, LoRAs or Sage attention — or **Duplicate** it to keep variants (the copy stays a swap style). Swap mode uses the style picked in the dropdown when it is a swap style, otherwise mmh3_chr_swap. A swap style can't be used for a normal render (the app says so).

## The H3_Viggle style

**H3_Viggle** (2.352.0) renders a scene the Viggle-Animate way, through ComfyUI. The scene's **motion video** drives the movement, and a picture says who performs it:

- **ref2va:** the character sheet or picture performs it (`comfy_workflows/H3_Viggle_ref2va.json`);
- **fl2va:** the scene's first frame performs it (`comfy_workflows/H3_Viggle_fl2va.json`).

Both are Tim's Viggle-Animate graph with the side-by-side comparison taken out. They need the same ComfyUI files as the swap dialog's Viggle (H3) engine (see *Character swap* above).

**From the prompt docker:** pick the video style **H3_Viggle** and put the motion clip in the reference dock's **Video** tab (its first video is the motion). Then:

- **Ref** (ref2va): the first reference picture performs it. Viggle takes one picture; the others are left out and the log says so.
- **F/L** (fl2va): the first frame performs it.
- **t2va** is refused, because there is no one to animate.

**On the scene board:** set the StoryBoard's *Workflow* to **H3_Viggle**. Each scene then shows a **Motion** slot. Choose… picks a video from the project, another scene's take, or a file; × removes it. The scene's type picks the variant:

- **Ref:** the first cast sheet (or the scene's first picture) performs, ref2va.
- **First / Cont / Trans:** the frame the scene starts on performs, fl2va. That is its First picture, else the frame it continues from.

A scene without a motion video is refused in words.

How the length and the render work:

- **Length:** the board song's window for the scene, else the scene's own length, else the motion clip's length. If the clip is shorter, its last frame is held.
- **Frames:** H3 renders 17 × n + 5 frames, and Viggle at least 124. A shorter scene is rendered at 124 frames and trimmed. Longer than 15 s is chunked: chunk 2 onward continues from the hand-off frame (fl2va) and cuts the motion from where the last chunk stopped.
- **The motion clip** is cut per chunk at the render size (scaled to fill, centre crop, multiples of 32) at 24 fps, and its own sound stays on the take.
- Viggle's 3-step DMD schedule is used, not the ⚙ step count. The style's LoRAs are chained after the DMD LoRA. fp16 accumulation is off, because it can turn a Viggle take black. An all-black take is refused in words.
- The H3 accelerators, RefMods and the upscale stage do not apply.

## The SFX dock

A dock for the project's sound effects, kept in projects/<project>/sfx as 48 kHz stereo WAV files. That means every cut is sample-exact and cutting again never loses quality.

- **Add** takes audio files (wav, mp3, flac, ogg, m4a, aac, opus, wma, aiff) and video files (.mov, .mp4, .m4v, .mkv, .webm, .avi, .wmv, .flv, .mpg, .3gp, .mts/.m2ts, .ts, .mxf). For a video, its audio track is extracted. A video with no audio track is refused, with a message saying so.
- **The waveform:** drag across it to select a part, or click it to move the play position. + zooms in on the selection and shows the whole sound again. Start and End take exact seconds. ▶ plays the selection, or the whole sound when nothing is selected.
- **Duration** gives the selection a fixed length. Press on the waveform to drop a box of that many seconds centred on the pointer, then drag to slide it. Changing the Duration resizes the box from its start, and typing Start or End moves the whole box. Leave Duration blank to drag-select any length. Any selection can be slid by grabbing it.

- **The gallery:** every saved cut (Keep or Delete) is also copied into the gallery's **Audio** tab as sfx_<name>, and the tab opens to show it. Cutting the same sound again, or ↶ Undo, updates that copy.
- ✂ **Keep selected** leaves only the selected part. **Delete selected** cuts it out and joins the two sides. Every cut edge gets a 5 ms fade so there is no click.
- **Where cuts go:** a cut changes the file itself, and ↶ **Undo** brings back the version before the last cut. Tick **as a new file** to write name_keep.wav or name_cut.wav and leave the original alone.
- → copies the sound effect into the Sound assets, where the timeline and the references can use it. deletes the file.

### Speech & dialog (2.621.0)

Under the sound effects, the SFX dock reads text aloud - one voice, or a dialog with a voice per speaker - with emotion, using OmniVoice or Ming-3.0 TTS, and saves it into the **Audio assets** (projects/<project>/sound).

1. **File name** (the box above the text) - the file is saved as that name .wav or .mp3; a name already there is never written over (_2 is added).
2. **The text** - type it, **Paste** it (or Ctrl+V), or write a brief and press **Write** for the LLM to write the lines (Ctrl+Z in the box brings the old text back). **tag** puts a sound such as `[laughter]` or `[sigh]` where the cursor is.
3. **Description** (the box below the text) - what it is for.
4. A dialog is one line per line: `Anna (happy): We made it!` - `Ben: Already?` - `(sad) It is over.` A line with no name goes on with the speaker above; a blank line is a longer pause. The **Cast** lists the speakers found - give each a voice (from Settings ▸ Audio ▸ Voices) and an emotion for the lines that name none. **One voice reads it all** reads the whole text in the chosen **Voice**.
5. Pick the **Engine**, **Emotion**, **WAV / MP3** and the **Pause** between lines, then **Read & save to Audio**. A player under it plays the result.

Emotions: neutral, happy, sad, angry, fearful, disgusted, surprised. **Ming-3.0 TTS** reads each line with its EMOTION task (with a cloned voice too). **OmniVoice** has no emotion switch: the emotion moves the pace a little, a voice saved as `Anna.happy` (Anna recorded happy) is used for Anna's happy lines, and the sound tags are read as sounds.

The file carries its own **metadata**: the title, the date and time it was made, the description, the whole text and the voices (WAV: the INFO list; MP3: ID3 - the text as its lyrics).

## Save and Save as (preview dialog and gallery)

- **Save as** is the small icon at the top left of every gallery tile (on a song it is in the name row); it brightens when you hover the tile. It opens the file dialog in Save As mode: pick a folder, change the name if you like, and press Save. If a file with that name is already there, the dialog asks once, and pressing Save again replaces it. That folder becomes your **last save-as location**.
- **Save** in the preview dialog (next to ↗ Open externally) saves a copy straight into the last save-as location under the file's own name, with no dialog. If a file with that name is already there, the copy is named "name (2)" and so on: Save never overwrites. The first time, or if the folder is gone, it asks with Save as. Shift-click Save to choose a folder anyway. The button's tooltip names the folder it will use.
- The location is remembered for the whole install (workspace/save_as.json), across projects.
- From a phone or another computer (the remote page), both buttons download through the browser, because saving writes to the computer running bitGen Studio.

## Transitions between song segments (bridge scenes)

On the StoryBoard's song strip, tick **Transition** (before ), set its length in seconds (0.1 - 4) and a type, then press . Every segment except the last gives up that many seconds at its end to a **bridge** scene, so each segment still starts on the cut you placed. The board then reads, for three segments: scene 1, bridge, scene 2, bridge, scene 3. The song's .seg file keeps your cuts unchanged.

A bridge goes from the scene before's **last frame** to the scene after's **first frame**, so render both neighbours first (Render selected queues bridges after the scenes around them). Each bridge card has a type picker instead of Ref / First / Cont / Trans:

- **AI (fl2va)** - the native-audio board (MMH3_NativeAudio_MV) renders the move with the model, starting on the last frame and ending on the first frame. H3 renders 17n+5 frames, so a 0.5 s bridge renders 22 frames and is then fitted to exactly 0.5 s with the song under it.
- **A standard transition** - cross dissolve, dissolve, dip to black/white, wipes, slides, circle, clock, pixelize, blur (the timeline's list). Drawn with ffmpeg between the two frames: no model, and it renders in seconds on any workflow.

The music-video writer only writes the segments; the bridges stay where they are. Saving again with the same type keeps each card's own pick; a new type on the strip applies to every bridge; unticking Transition and saving removes the bridges.

## Render size on the scene board

Board renders (▶ on a card, ↻ redo, Render selected - the native-audio music video included) are rendered at:

1. the StoryBoard's ⚙ **Resolution**, when it is set to 480p/540p/720p/1080p;
2. otherwise the left **Basic Settings** width x height (its Resolution/Aspect pickers, or the custom fields) - sent with every press and kept for the project, so queued and auto-started scenes use it too;
3. otherwise the app default size (Settings).

The job's notes say which one was used ("render size 1280x720 (Basic Settings, the left dock)"). Larger is sharper but slower and needs more VRAM; 720p plus the ⚙ upscaler ( on a take you like) is a good balance.

## The timeline's preview canvas

The timeline docker now has a preview canvas at the top, a toolbar on its left and a **Layers** panel on its right. in the timeline's menu bar shows or hides them, and the bar under the canvas makes it taller or shorter. Drag the timeline docker taller if the canvas looks cramped.

- **Drop** videos, pictures or sounds onto the canvas, from the Assets, the gallery or your computer. Each one lands on a **new layer** at the position marker, where you dropped it. A video dropped on an empty timeline goes on V1.
- **Toolbar:**

  – ✥ **Move (V)** — click a layer to select it, then drag to move it. Drag a corner to scale it, or the round handle on top to rotate it. Hold Shift to rotate in 15° steps or to move along one axis. V1 is the base picture: it always fills the frame and can't be moved.

  – **T Text (T)** — click to add a text layer, then type in the Layers panel. Font, size, colour, bold, italic, outline, shadow and alignment are all there. Click a text layer with T, or double-click it, to edit it.

  – **Hand (H, or hold Space)** pans the view. **Zoom (Z)** zooms in; Alt-click (or Ctrl + wheel) zooms out. fits the picture.
- **Play:** ▶ / under the canvas, or tap Space with the mouse over the canvas. Every layer plays together, with sound, and the timeline's position marker follows. loops the ruler selection, or the whole timeline.

- **Layers panel:** shows or hides a layer, ▲ ▼ change its order, deletes it, and double-clicking renames it. The selected clip's X, Y, Scale, Rotation, Opacity and length are underneath.
- **Compile** draws the moved, scaled and rotated layers and the text exactly where the canvas shows them.

### Generating inside a selection ( Fill)

1. Pick ⬚ **Select** (M) and drag a box over the area, or **Mask** (B) and paint it (Alt erases).
2. In the Layers panel's **Fill**, write what should be there, choose **Image** or **Video** (and seconds), then **Generate**.
3. The result lands on a new layer exactly over the area, with a soft edge (the feather) so it blends into the scene. An image lasts the ruler selection, or 3 s; a video starts at the position marker.

### Animating a layer with keyframes

Keyframes make a layer move, grow, turn, fade or change colour over time. Between two keyframes the canvas works out every frame for you (a tween), and Compile draws the same animation.

1. Select the layer and move the position marker to where the animation should start.
2. Click ◇ **Key** in the Layers panel, under X / Y / Scale / Rot. This saves the layer's position, size, rotation, opacity (and a text layer's colour) at that moment. A ◆ appears on the clip in the timeline.
3. Move the position marker later, then change the layer: drag it, scale it, rotate it, or type new X, Y, Scale, Rot, Opacity or colour values. A second keyframe is made there automatically.
4. Press ▶. The layer animates from the first keyframe to the second.

Add as many keyframes as you like. Once a property has keyframes, changing it always edits the keyframe at the position marker, or makes a new one there. Properties without keyframes stay as they are.

- ◀ ▶ next to ◇ Key jump to the previous or next keyframe. On a keyframe, the menu beside them sets how it moves to the next one: **linear**, **ease in** (starts slowly), **ease out** (ends slowly), **ease in+out**, or **hold** (stays put, then jumps at the next keyframe). ×◆ deletes that keyframe.
- Click a ◆ on a clip in the timeline to edit that keyframe directly: opacity, volume, X, Y, scale, rotation, colour and the ease. Diamonds with an ease are blue; held ones are white.
- Sound clips can have volume keyframes too, and Compile now applies those as well.

## Render size with H3

H3 renders in steps of 32 pixels. In the StoryBoard's ⚙, **H3 size** picks what happens to a size between steps: **704** rounds down (1280×720 renders as 1280×704), **736** renders 1280×736 and crops the take back to exactly 1280×720 (about 4% slower). Takes rendered before 2.379.2 have a dark strip at the bottom; render them again.

## Scenes and the song

A scene renders against its own part of the song: a scene starting at 15.5 s uses the song from 15.5 s. With a song on the board, each rendered take is placed on the timeline at that same time, so picture and song stay in sync. To place each take straight after the previous one instead, untick "Place each rendered scene at its song time" in ⚙ Timeline settings.

## Nudging timeline clips

- ⚙ at the right end of the timeline's menu bar opens **Timeline settings**. Under **Nudge**, set how many frames ← / → move a clip (default 1) and how many Shift + ← / → move it (default 24 = 1 second). The dialog shows each value in seconds too.

- Click a clip to select it, then press ← or → to nudge it earlier or later on its layer. A clip never goes before 0. V1 plays its clips one after another, so a V1 clip stops at the clip ahead of it. Use a video layer to overlap clips.
- The arrows are left alone while you type in a field or while a dialog is open.

## Override style and the StoryBoard

With **Override style** ticked in Basic Settings, the StoryBoard's renders use Basic Settings' **Steps** and **CFG**. They take priority over the StoryBoard's ⚙ and the workflow's own count. With it unticked, the ⚙ decides (blank = the workflow's own). A render's notes say which one it used. A Steps value of 0 ("auto") leaves the count to the ⚙ or the workflow.

## Recycle bin and resetting a project

- **Recycle bin** (left dock menu bar): opens the project's recycle bin. Files you delete from the gallery or the assets go there. Each file shows where it came from and when it was deleted.
  - ↩ **Restore** puts the selected files back in their folders (double-clicking a file does the same).
  - × **Delete** removes the selected files for good. It asks first.
  - **Empty** deletes everything in the bin for good. It asks first.
- ↺ **Reset project** (left dock menu bar): deletes the whole project folder, including its recycle bin, and creates it again, empty, with the same name and description. It asks you to confirm first. Every docker then starts empty, as if it were a new project: the queue's finished jobs for this project and their cached files are cleared too, and any of the project's renders still queued or running are stopped (the confirm box says how many).
- If a file in the project is still open in another program (a media player, Explorer's preview pane, ComfyUI), Windows won't let it be deleted. The reset still makes the project new, then tells you which files were in use. Those files are deleted the next time bitGen Studio starts.
- After a reset you can add characters (with pictures) straight away; uploads always go to the open project.

## Karaoke: lyrics with a bouncing ball

- **Lyrics file:** every song bitGen makes saves its lyrics as `lyrics/<song name>.txt` in the project folder. For a song you brought in yourself, put its lyrics in a txt with the same name in that folder.
- **Karaoke** (StoryBoard menu bar): when a scene finishes rendering, bitGen makes a second video for it. That video has a transparent background and shows the scene's part of the song's lyrics: the current line turns from white to yellow as it's sung, the next line waits underneath, and a ball bounces onto each word. The scene's own video has no lyrics.
- The lyrics video goes on the timeline's **Karaoke** layer, lined up with its scene. That layer always stays on top, and Compile shows the scene through the transparent parts.
- **Timing:** if speech-to-text (faster-whisper, Settings → Audio) is installed, it times your lyrics against the singing. Without it, the lyrics are spread evenly over the song as a rough guide.
- Turning on also makes lyrics videos for scenes that are already rendered.
- **A bar or captions at the bottom of a scene?** Once the song is timed, each scene's prompt includes the words sung in that part (for lip sync). The prompt tells the video model not to show them as text. If a scene still has a bar, hide the Karaoke layer () and look at the scene on its own in the gallery: if the bar is there too, the model painted it into the video, so re-render that scene.
- **in the timeline's menu bar** makes a karaoke overlay for any song: pick a sound clip on the timeline (or a sound asset), the whole song or the ruler selection, check the lyrics, then **Generate**. The overlay goes on the Karaoke layer, lined up with the song.

- **Karaoke style** (in the StoryBoard's ⚙ and the timeline's ⚙): font, font size, colours, opacity, outline, text shadow, a background band (colour, opacity, border, box shadow, height, position from the top) and the ball's size and colours. New overlays use it.

## Saving and opening a project

- **Save** keeps everything in the project: the StoryBoard's song and scenes, the prompt, the prompt chat, characters, environments, references, assets, the gallery, the timeline and each docker's fields (for example the music title and the enhanced prompt). Keep the name as it is to save in place.
- **The reference docker is kept as you change it** (2.548.0): a picture, video or sound added, removed or described is written to the project within a couple of seconds, so closing the app keeps it even without Save. All of them are kept - a save used to keep only 9 pictures, and a 10th refused the whole save. Pictures with the same name (pasted pictures are all "image.png") get their own names (image_2.png …).
- **F/L, Swap and Text no longer throw pictures away** (2.548.0): the dock keeps them all; F/L sends the first two (the rest show faded), Swap the first one, Text none. Back in Ref they are all there.
- **The StoryBoard's shared prompt is kept as you type** (2.548.0) - a moment after you stop, when you leave the box, and when the app closes; beside it still saves at once. Its @tags, the chapter references and each scene's own pictures are kept with the project through Save, Save as and closing.
- **Save as**: type a new name in the same box. The whole project is copied under that name, and the app opens the copy. The original stays as it was. An existing project's name is refused, so nothing is overwritten.
- **Open**: the project you're leaving is saved first. The app then reopens on the one you picked, with every docker exactly as it was saved.

## Starting a new project

**New project** gives you a clean slate. The project you are leaving is saved first, exactly as it was. Then the app reloads on the new project, so every docker starts empty: references, characters and actors, environments, scenes, the prompt chat, assets, the gallery, the timeline and the music dock. The queue shows only this project's finished jobs. Anything still rendering for another project stays listed until it finishes. **Open** a project to go back to it; everything is where you left it.

## Saving and clearing the prompt chat

- **Save** stores the conversation as **`<subject> - <date>`**, for example `A woman walking in rain - 2026-10-05`. If an LLM is already running, it names the subject; otherwise the name comes from the first words you asked. A name already taken gets `(2)`. The chat carries on in a fresh copy.
- **The list** next to it shows every saved chat, newest first. **Load** opens one.
- (right after the list) clears the current conversation: both the window and what the model remembers. Saved chats are kept. If the chat has messages, it asks first.

## Screenshots and screen recordings (promos, tutorials)

The menu bar (the row of buttons at the top of the window) has two icon buttons, just before ⚙:

- **Screenshot** (Alt+Shift+S): saved to the gallery's Images as `screenshot_<date-time>.png`.
- **Record** (Alt+Shift+R): click to start. The button turns into a pulsing red ■, and hovering it shows the time. Click again to stop. The recording is saved as an H.264 mp4, `screenrec_<date-time>.mp4`, in the gallery's Videos, so it is ready for any editor or phone. Recording sends the video to the server every second, so long tutorials are fine.

Right-click either button for the options. They are remembered on this computer.

| Option | What it does |
|---|---|
| **App window / Whole screen** | Capture just bitGen Studio (the cleanest frame for tutorials) or the whole screen it is on |
| **Computer sound** | Records the sound your computer plays, such as the renders and songs you preview. In the app this works on Windows; a browser tab asks you to tick "share audio" |
| **Microphone** | Records your narration, mixed with the computer sound |
| **Countdown** | Off, 3 s or 5 s before it starts, so you can get the mouse in place |

In the app the window or screen is picked for you. In a browser tab, the browser asks what to share.

## CFG on MiniMax H3

MiniMax H3 is distilled to render at **CFG 1**: one model pass per step, no negative prompt. The H3 graphs use a guider without a CFG input, so before 2.366.0 the Basic Settings CFG never reached them.

Set CFG **above 1** and the render switches to true CFG: a second, negative pass runs with the same pictures, voice and video references and a negative text (mumbling, babbling, extra words, repeating the reference audio). The guidance then strengthens only what your **prompt text** adds, such as the words in `<d>...</d>` and the acting. Each step runs twice, so the render takes about twice as long.

- Start at **2 to 3**. Higher values over-sharpen and over-saturate.
- Turn **Settings → ComfyUI → 4-step LoRA off** and use **20+ steps**. The turbo LoRA is made for CFG 1, and the job log warns when it is on.
- The job log line `true cfg 3: 1 BasicGuider -> CFGGuider ...` confirms CFG was applied.

## Speech with emotion in a character's voice (no song)

On a board without a song, the characters speak their lines, each in their own voice. A character's voice clip is used for its **timbre only**: pitch, accent, texture and emotional colour. The model is told never to say the words heard in the clip.

- **How the writer writes lines:** every line carries its emotion and manner, e.g. `@anna whispers, voice trembling with fear: "Is someone there?"`. The matching face and body go in the beat before the line. It never quotes or reuses what a voice clip says.
- **What the app sends:** at render time each spoken line becomes MiniMax H3's own dialogue syntax. The delivery stays outside the marks and the words go inside, e.g. `whispers, voice trembling with fear, in the timbre of <Audio 1>: <d>[English] Is someone there?</d>`. The prompt ends by saying that only those lines are spoken. Lines in plain prose are what made the model babble.
- **Voice clips:** a clip longer than 8 s goes to the model as an 8 s sample with any silence at the start removed. That gives it the voice with far less speech to copy. Your file is unchanged, and the scene's notes say when a clip was trimmed.
- **Other languages:** write `"[Spanish] ..."` in the quotes and that language is used instead of English.
- **The prompt docker:** the prompt chat (Enter) is taught the same syntax. Local LLMs don't always follow it, so the app also fixes their output itself. The enhanced prompt comes back with its spoken lines marked, and the console says so. Every prompt render marks any line still in plain quotes, e.g. `says with a bright smile: "Thank you!"` becomes `says with a bright smile: <d>[English] Thank you!</d>`. Quoted names and signs ("a hotel called "The Palace"") are left alone. The voice is the `<Audio n>` the prompt calls her voice, or the one reference sound whose file name says voice.

## How bitGen writes a MiniMax H3 prompt with speech

Every LLM that writes a video prompt (the prompt chat, Enhance, the reference dock) is taught this shape, with a worked example:

```
<Subject 1> is the woman in <Picture 1>, the charismatic host of a luxury travel ad.
<Subject 2> is the reception area and desk in <Picture 2>.
<Audio 1> is the voice timbre for <Subject 1> - pitch, accent and tone only.

Medium shot. ... She looks into the camera and says with a bright, welcoming smile, in the timbre of
<Audio 1>, <d>[English] Thank you!</d> She then holds her warm smile in silence as the camera slowly
pushes in. ... Sound: only her line in <d>, then a soft sea breeze and gentle room tone.
```

- Definitions come first, one per line: subjects, then the voice.
- Each spoken line sits inline, with its emotion outside the tags, its words inside, and the language marked.
- After a short line, the speaker does something silent.
- The prompt ends with one Sound line, and never stacks "do not speak" negatives.

Local LLMs drift from that, so the LLM's prompts and every prompt render are put into the shape by the app itself. The console or job log lists what was changed:

- `<subject n>` becomes `<Subject n>`.
- Quoted speech becomes `<d>`, and a `<d>` without a language gets `[English]`.
- Every `<d>` line goes "in the timbre of" the voice.
- The voice is defined once, after the subject lines.
- Stray "the voice is only the timbre of…" sentences and repeated "do not speak / no murmurs / DO NOT SPEAK AUDIO 1" instructions are removed. One closing line takes their place: only the `<d>` lines are spoken.
- A story beat like "she does not speak until the door opens" is kept.

## Lip sync on a music-video board

On the **MMH3_NativeAudio_MV** board the song is the voice: a scene lip-syncs only when its prompt has the singing line (`… sings the exact supplied vocal audio with natural, precise lip synchronization …`). A scene that says `lips remain fully closed` renders **without** lip sync. From 2.356.0:

- **The song's timed transcript decides.** Transcribe the board song's lyrics once (Voice / Stems → Transcribe, lyrics mode). It is saved in the project's `transcripts` folder as `<song>.srt` / `.lrc`, or you can put your own `.srt` / `.lrc` beside the song. Then every scene's window is checked when it renders:
  - **words in the window:** a closed-lips line becomes the singing line, and the words go into the prompt (`The words sung in this clip: "…"`) to help the lips;
  - **no words** (an intro, a solo, a break): a singing line becomes the closed-lips line.
- **The writer** sees the same list (which scenes are sung, with their words). It must sing every scene and may close the lips only on a stretch the transcript (or your brief) says is instrumental. A guitar or a quiet mood is no longer a reason to close them.
- **No transcript:** a closed-lips scene stays as written, and the render note says it will have no lip sync.

## The prompt LLM and your references

When you chat about a **video**, the LLM is given the reference dock the way the video model will receive it (2.354.0):

- the pictures in tray order as `<Picture 1>`, `<Picture 2>` …, each with its subject number, its role and a one-line description from the local vision model (described once, then remembered; Describe off skips it);

- the videos as `<Video 1..3>` and the sounds as `<Audio 1..3>`.

It writes prompts like: *`<subject 1> is the woman in <Picture 1>.` Keep the head, face and hair of the woman in `<Picture 1>`, keep the body of the woman in `<Picture 2>`. She does the action in `<Video 1>`, her voice is `<Audio 1>`.* If a model still writes a file name as a tag (`<photo.png>`), or `<sound 1>`, the reply is corrected to the right tag before you see it. MiniMax H3 calls sounds `<Audio n>`.

## Reference videos and sounds in a prompt render

The reference dock's **Video** and **Sound** tabs feed MiniMax H3's reference render (ref2va) as `<Video n>` and `<Audio n>`: up to 3 of each. From 2.353.0:

- **Slots are added when needed.** If the style's ref2va workflow (for example **H3_Video_Ref**) was saved with picture slots only, the render adds the video and sound slots itself. A video's own sound goes in with it. The log says `the graph had no video reference slot - added 1`.
- **No picture needed.** Reference mode renders with only a video or a sound. Text mode with a video or sound loaded is rendered as ref2va so they are used, and the queue says so.
- First / Last on a reference workflow (H3_Video_Ref) sends the video and sound along too.

## Append / Prepend a reference video (2.388.0)

Under every video in **References → Video** there is a **Use** dropdown:

- **Reference** (default): the model follows the video, as before.
- **Append**: **Generate** (prompt docker) takes the video's **last frame**, upscales it to the video's size (the ⚙ PNG upscaler, or lanczos without one) and renders a new part **starting** on it. The result is **video + new part** as one clip; the new part alone is kept as `<name>_part.mp4`.
- **Prepend**: the same with the **first frame**: the new part **ends** on it and goes **before** the video.

**Always first / last frame (2.395.0).** Append and Prepend always render **fl2va** (MiniMax H3's first / last frame model), never References or a plain image-to-video:

- **Picture 1** is the video's frame: its last frame for Append (the start of the new part), its first frame for Prepend (the end of the new part).
- **Picture 2** is the first picture in **References → Image**: the end of the new part for Append, its start for Prepend. A picture whose Type is **Last frame** (Append) or **First frame** (Prepend) is used instead.
- The Image tab labels that picture **Picture 2 · last frame** (or **· first frame**). fl2va takes two frames, so the other pictures are dimmed and marked **not used**. The video's own card says what it gives.
- With no picture, the new part starts on the video's last frame (Append). For Prepend it is made forward from the first frame and played backwards, silent, so it lands on the video.
- No `<subject n>` lines are added to the prompt, because the pictures are frames, not subjects.

**The LLM is told.** The prompt chat gets the details:

- that this is an fl2va Append or Prepend of that video;
- that **Picture 1** is its last (or first) frame. The frame is taken out and described by the local vision model, like any reference picture;
- that **Picture 2** is your picture and where the new part starts or ends.

They write one continuous shot that carries on from the video, or leads into it, with no mapping lines and no cuts.

One video at a time can be Append / Prepend. It works with MiniMax H3 styles and Wan styles. **Refmods** (a character's extracted identity mod) also work in fl2va renders - experimental, used by the board's continuation chunks.

## The floating prompt docker (2.389.0)

The prompt docker floats over the app as a window of its own.

- **Move it:** drag its titlebar. Its edges stick to the edges of the other dockers and of the window.
- **Resize it (2.398.0):** drag any edge or corner. A side docker's bottom edge sizes it there too. Docked in the column, its handle below sizes it. If nothing open is below it, the dockers above give it the room.
- **Collapse it:** click its titlebar.
- **Dock it:** drag it over another docker and the edge you are near lights up. Drop it there:
  - top or bottom puts it into the column above or below that docker;
  - left or right puts it beside that docker. A splitter between them sets its width.
  - A side docker (Settings, References, Assets, Queue, Gallery) takes it at its top or bottom.
- **Float it again:** drag its titlebar out of the dock.
- **P** shows and hides it, anywhere in the app. It does nothing while you are typing in a box, while a dialog is open, or with Shift held (Shift+P is the timeline's Path tool).
- Where it is, and its size, are kept in docker_status.json.

## Basic Settings and LLM tokens float (2.393.0)

**Basic Settings** and **LLM tokens** are no longer in the left docker. Each one is a floating docker of its own.

- **S** shows and hides Basic Settings. **L** shows and hides LLM tokens.
- The keys do nothing while you type in a box, while a dialog is open, or with Ctrl, Alt or Shift held.
- Over the image editor and the timeline canvas, S and L stay those tools' keys (Clone Stamp and Lasso in the editor, the 3D Scale widget on the canvas). Move the pointer off them first.
- The left docker has two buttons where the sections were: **LLM tokens L** and **Basic Settings S**. Click one to show or hide its window. A button is lit while its window shows.
- **Move a window:** drag its titlebar. Its edges stick to the dockers' edges, to each other and to the window's edges.
- **Resize a window:** drag any edge or corner.
- × hides it.
- Whether each window shows, where it is and its size are kept in docker_status.json (`floats`).


**They are dockers (2.398.0).** Drag Basic Settings or LLM tokens by its titlebar and the place it will go lights up:

- **Inside a docker, as a tab:** drop it on that docker's titlebar. The docker gets a row of tabs: its own name, then each panel in it. Click a tab to switch. This works for any docker, including Settings on the left.
- **Above or below a bottom docker** (Preview, Video, Music…): drop it near that docker's top or bottom edge. It takes its own place in the column, and its bottom edge sets its height.
- **Beside a bottom docker:** drop it near the left or right edge. Its inner edge sets its width.
- **Stacked in a side docker** (Settings, References, Assets, Queue, Gallery): drop it near the top or bottom edge. Its bottom edge sets its height.
- **In the left docker's list** (2.401.4): drag it over the Settings list (System, the panel buttons…). A line lights up between two sections and the label says where, for example "Dock Basic Settings in Settings - above the panel buttons". Drop it and it sits in the list at its full height and scrolls with it, like the sections did before. Put LLM tokens and Basic Settings in any order. Its titlebar still drags it out again.
- Let go anywhere else and it floats there.
- **Float it again:** drag its titlebar, or its tab, out.

- **S**, **L** and × still hide and show it wherever it is docked.

Where each one is docked, its sizes and which tab is showing are kept in docker_status.json, so they come back the same after a restart.

## Choosing the frames of a reference video

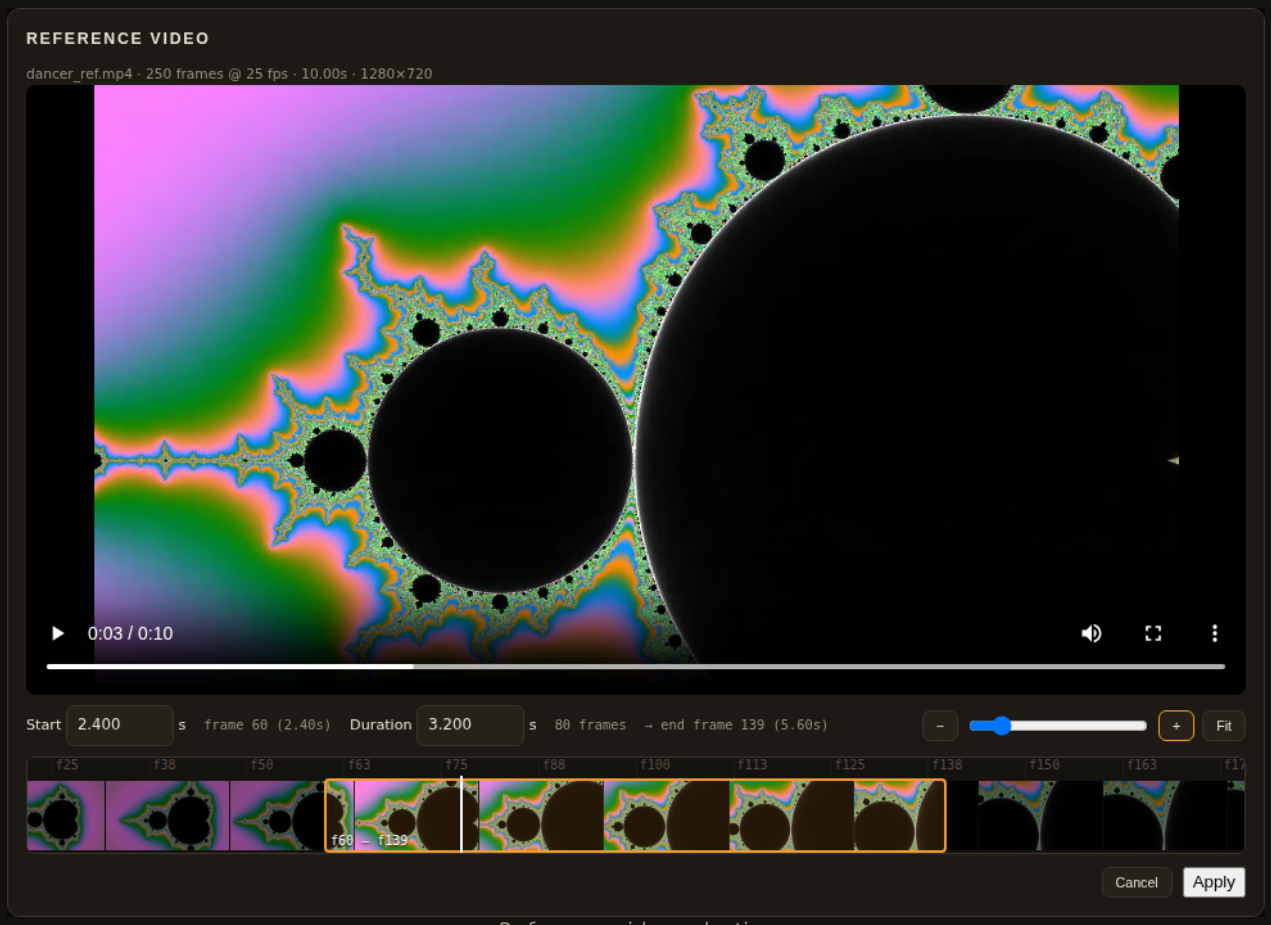


*Reference video selection*

Click any video in the **References → Video** tab:

- the **preview** plays only the selected frames, looping;
- the **filmstrip** zooms with **− / + / the slider / Ctrl+wheel** (from the whole video down to one thumbnail per frame); **Fit** shows it all;
- the **selection box** is as long as the **Duration** — drag it, click the strip to centre it, or nudge it with ← → (one frame; Shift = one second). Start and end frames are shown under the preview.

**Apply** cuts exactly those frames into `<name>_sel_f<first>-f<last>.mp4` beside the original and puts it in the reference slot — Ref, F/L and Swap then use only that part. Clicking the cut again reopens the original with the box where you left it. **Cancel** changes nothing.

## Images, ControlNet and face fix

Set the Generate dropdown to **Image** and pick an image style (FLUX.2 Klein, SDXL, Z-Image, Qwen-Image…; manage them in **Settings → Image**). In Basic Settings:

- **ControlNet** (2.593.0: an add-on - switch it on in Settings ▸ General) — renders a first picture, turns it into a control image (lineart, depth, pose…) and renders the final with a **second model** (e.g. a photoreal SDXL or Klein), with its own prompt, strength and end. *Final image only* hides the intermediate pictures.
- **Face fix** (2.593.0: an add-on - switch it on in Settings ▸ General) — FaceDetailer re-draws each face of the final picture.
- The **Image editor** docker edits pictures with AI; see the next section.

- **Qwen Image 2.1 reads the reference dock** (2.340.0). With **qwen2_1** (up to 10 pictures) or **Qwen Image 2.1 edit** (8), Generate Image sends the dock's pictures in order as `<image1>`, `<image2>`, ...
  - Write `<image2>` etc. in the prompt to point at them. The dock's own `<Picture n>` tags are translated for you.
  - If the prompt names none, one line is added saying what each picture is, from its Type (e.g. "<image1> is the person, <image2> is the clothing").
  - **qwen2_1** with an empty dock renders from text alone.

## The image editor (with AI)

From 2.389.0 the editor has a menu bar, an options bar, a tool column and panels (the same layout as PhotoCraft). Open it with **Editor** in the bottom bar. Drop a picture on it (from the gallery, assets, references or a file) - 2.549.0: with a picture already open it asks ▦ **Add as a layer** or **Open as a new document** (Enter = a layer, Esc = neither, Shift while dropping = a layer at once) - or use **File ▸ Open** (Ctrl+O) or **File ▸ New** (Ctrl+N). or **F** gives it the whole screen. **Tab** shows or hides the panels; **Shift+Tab** hides only the panel groups.

**Type along a path, warped and 3D text (2.397.0)**

The **T** button now holds three tools; **Shift+T** switches between them:

- **Horizontal Type**, as before.
- **Vertical Type**: one letter under the next. Each new line is a new column to the right.
- **Type on a Path**: drag a line across the picture, or click points and double-click (or press **Enter**) to finish, then type. The letters follow the line. With this tool, drag a point of the path to reshape it. **Start** moves the text along the path and **⇅ Flip** puts it on the other side. **Esc** cancels a path you are drawing.

The Type options bar has four new buttons: **TT** (all caps), **U** (underline), **S** (strikethrough) and **↕T** (vertical).

**Shape / 3D...** (in the options bar, in Properties for a text layer, or **Layer ▸ Text Shape**) changes a text layer live:

- **Warp**: Arc, Arc Lower, Arc Upper, Arch, Bulge, Flag, Wave, Fish, Rise, Squeeze or Inflate, with a Bend from −100 to 100.
- **Round a circle**: the text on a circle. Set the radius, where the text is centred, and whether it runs over the top or reads left to right along the bottom.
- **Along a drawn path**: for text made with Type on a Path.
- **3D**: the letters are extruded back. Set the depth, the direction, the shading to the back and the side colour (the text's own colour, darker, unless you pick one). Add **Bevel & Emboss** (below) to round the front.

The text stays editable the whole time: click it with the Type tool to change the words. **Cancel** puts it back as it was.

**Layer styles: Bevel & Emboss, Satin, Pattern Overlay, blend modes, Styles (2.397.0)**

The Layer Style dialog (**fx**, or **Layer ▸ Layer Style**) now lists The ten layer styles:

- **Bevel & Emboss**: Inner Bevel, Outer Bevel, Emboss or Pillow Emboss. Set the depth, up or down, size, soften, the light's angle and altitude, and the highlight and shadow colours and opacities.
- **Satin**: a silky sheen inside the shape.
- **Pattern Overlay**: ten patterns (checkerboard, stripes, diagonal stripes, polka dots, grid, bricks, waves, carbon fibre, noise, halftone) in two colours you choose, with a scale.
- **Color, Gradient and Pattern Overlay** each have a **blend mode** (Multiply, Screen, Overlay, Soft Light and twelve more).
- **Gradient Overlay** has five styles (linear, radial, angle, reflected, diamond), plus reverse and scale. It lines up with the layer's own content, not the whole picture.

- **Styles** at the top of the dialog gives one-click looks: Gold, Chrome, Neon, Embossed, Glass, 3D Pop, Retro, Fire, Ice and Letterpress. Each one replaces the layer's styles. You can change any setting afterwards.

Bevel & Emboss and Satin are saved to and read from PSD files. Pattern overlays in a PSD are still left out.

**New filters (2.397.0)**

- **Filter ▸ Render ▸ Lens Flare**: four lens types (50-300mm Zoom, 35mm Prime, 105mm Prime, Movie Prime), brightness and a tint. **Click the picture while the dialog is open to place the flare.** On an empty layer it makes its own light.
- **Filter ▸ Distort ▸ Swirl**: a whirlpool around a centre. Set the strength, radius and falloff, and click the picture to place the centre.
- **Filter ▸ Stylize ▸ Drop Shadow**: a shadow cast by the layer's pixels, with angle, distance, blur, spread, opacity and colour. It needs transparency around the pixels, for example text or a cut-out.
- **Filter ▸ Stylize ▸ 3D Extrude**: extrudes any layer's pixels with depth, direction and shading. The sides are a darker copy or a solid colour.
- Clicking the picture also places the centre for **Radial Blur**.

**Colours, New, the Paint Bucket and gradient fills (2.396.0)**

- **File ▸ New** fills the new picture with the **background colour** (the back swatch in the tool column) unless you pick White, Black or Transparent. The colour is shown beside the choice.
- **⇄ swap (X)** swaps the foreground and background colours. If the picture's **Background** layer is still one plain colour, it is repainted with the new background colour. That is one step, so **Ctrl+Z** brings the old colour back. A Background you have painted on is left alone. The Color panel has a ⇄ button too, and ◩ **(D)** sets black / white.
- The colour swatches are bigger and outlined, so a dark colour still shows on the dark theme.
- The **Paint Bucket** has its own button under the Gradient tool. **G** picks the one you used last and **Shift+G** switches between them. Its options bar:

  – **Fill**: Foreground, Background or **Gradient**.

  – With Gradient, a click fills the area from top to bottom. Drag to set your own direction. It uses the Gradient tool's colours and shape (linear, radial…) and fills only the clicked area.

  – **Tolerance**, **Contiguous** (off = every matching pixel in the picture), **All layers** (find the area in everything you see) and **Opacity**.

  – A click inside a selection fills the selection. Alt-click picks a colour.

**It looks like bitGen (2.393.0)**

- The editor uses the **bitGen** theme: the app's dark colours and its orange accent. Its menu bar is the same height and colour as bitGen's menu bar. Its status line is the same height and colour as bitGen's status bar.
- **Full screen ( or F)** keeps bitGen around the editor. bitGen's title bar, menu bar and status bar stay where they are; the editor fills the space between them. The editor's status line moves into bitGen's status bar ("Editor · …"). **Esc**, **F** or again puts it back in its docker.
- **Window ▸ Theme** still has Pro (dark), Studio (light) and Classic.

**The layout**

- **The menu bar** holds File, Edit, Image, Layer, Select, Filter, View, Window and Help. Every item has its usual shortcut.
- **Ctrl+K** opens the command palette: type part of a command and press Enter.
- **Help ▸ Keyboard Shortcuts** lists every key.
- **The options bar** under the menus shows the settings of the current tool.
- **The tool column** has the usual groups and keys:

  – selection and move: Move (V), Marquee (M), Lasso (L), Magic Wand and the quick selection brush (W), Crop (C), Eyedropper (I);

  – retouching and painting: Spot Healing and Healing Brush (J), Brush and Pencil (B), Clone Stamp (S), History Brush (Y), Eraser (E), Gradient and Paint Bucket (G), Blur, Sharpen and Smudge (R), Dodge, Burn and Sponge (O);
  – type and shapes: Type (T), Shape (U);
  – view: Hand (H), Zoom (Z).
- A small triangle on a tool means it has more tools in its group. Press Shift with the key to cycle through them, or right-click or long-press the button to pick one.
- At the bottom of the column: D sets the default colours, X swaps them, and Q (◘) turns Quick Mask on or off.
- **P is not a tool here.** P shows and hides the prompt docker everywhere.
- **The panels** on the right come in three groups:
  – **Color** and **Swatches**;
  – **Properties**, **Adjustments**, **AI** and ◈ **Control**;
  – **Layers** and **History**.
- **Window ▸ Theme** picks Pro (dark), Studio (light) or Classic.
- **View** turns on the Rulers (Ctrl+R) and the Grid (Ctrl+').

**Layers**

- **Kinds of layer:**
  – pixel layers;
  – **adjustment layers** (the Adjustments panel, or Layer ▸ New Adjustment Layer). They change everything below them without touching any pixels. There are 14: Brightness/Contrast, Levels, Curves, Exposure, Vibrance, Hue/Saturation, Color Balance, Black & White, Photo Filter, Channel Mixer, Gradient Map, Invert, Posterize and Threshold. Their settings are live in Properties.
  – **fill layers** (solid colour or gradient);
  – **text layers** (T: click and type; Esc or Ctrl+Enter commits; click the text again to edit it);
  – **shape layers** (U: rectangle, rounded rectangle, ellipse, triangle, polygon, line), which stay editable;
  – **groups** (Ctrl+G groups the active layer; Shift+Ctrl+G ungroups; 2.549.0: the keys work right after a click in the Layers panel too). A group set to *Pass Through* lets its adjustment layers reach the layers under it. Any other blend mode composites the group on its own. 2.547.0: with **several layers picked** (Ctrl-click / Shift-click in the Layers panel) **Ctrl+G** puts them all in one new group, in their order; with **one group** selected **Ctrl+G** ungroups it. With several layers picked the button, Layer ▸ Delete Layer and Shift+Del delete them all (one Ctrl+Z brings them back).
- **Layer masks** (◫, or Layer ▸ Layer Mask) show where white and hide where black:
  – click the mask thumbnail to paint on it;
  – Alt-click it to view the mask itself;
  – Shift-click it to disable it;
  – Ctrl-click it to load it as the selection.
  – Properties sets its density and feather, and can invert, apply or delete it.
- **Clipping** (Alt+Ctrl+G) shows a layer only where the layer below it has pixels.
- **Layer styles** (fx, or double-click a thumbnail): Drop Shadow, Inner Shadow, Outer Glow, Inner Glow, Stroke (outside, inside or centre), Colour Overlay and Gradient Overlay. They can be copied and pasted.
- **Fill opacity** dims the pixels but not their styles.
- **Locks:** transparent pixels, image pixels, position, all.
- **Right-click a layer** to set a colour label and more.
- **Drag layers** in the panel to reorder them, or drop one onto a group to put it inside.
- **Arrange:** Ctrl+[ and Ctrl+] move a layer down and up; add Shift for back and front.

- **Merging:** Merge Down (Ctrl+E), Merge Visible, Flatten Image, Rasterize.
- **History:** the History panel lists every step (the last 80). Click one to go back or forward to it.

**Select first. Everything else respects the selection.**

- **Combining:** Shift adds, Alt subtracts, Shift+Alt intersects (or use the buttons in the options bar). The options bar's **Feather** softens the next selection.
- **Select menu:**
  - All (Ctrl+A), Deselect (Ctrl+D), Reselect, Inverse (Shift+Ctrl+I);
  - **Color Range**;
  - **Modify:** Border, Smooth, Expand, Contract, Feather (Shift+F6);
  - load a layer's transparency or its mask as the selection.
- **Quick Mask (Q):** the selection shows red where it is not. The brush adds to the selection and the eraser removes from it. Press Q again to turn it back into the selection.

**Paint and retouch**

- **Brush (B)** uses one of the 20 presets (▾). The keys 1…0 set the opacity. Alt-click or Ctrl-click picks a colour. A tablet's pressure drives the size and/or flow.
- **Pencil:** a hard edge.
- **Clone Stamp (S):** Alt-click the source, then paint. Choose aligned or not, this layer or all layers.
- **Healing Brush:** the same, with the colour matched to the spot it is painted on.
- **Spot Healing (J):** paint over a spot and it is filled from around it.
- **History Brush (Y):** paints the layer back as it was opened. Use Set source to change that point.
- **Dodge, Burn, Sponge (O):** a tone range and an exposure.
- **Blur, Sharpen, Smudge (R):** a strength.
- **Gradient (G):** linear, radial, angle, reflected or diamond. The colours can be foreground to background, foreground to transparent, black and white, or a spectrum.
- **Paint Bucket (Shift+G):** fills an area of similar colour.
- **Crop (C):** drag a box, pick a ratio, Enter crops (Esc cancels).
- **Free Transform (Ctrl+T, or Transform on the Move tool's bar):** drag inside to move. A corner scales and keeps the proportions; Shift-drag a corner to scale freely. Drag outside the box to rotate (Shift for 15° steps). 2.551.0: a **middle handle skews** it (the cursor turns into a slanted arrow; top / bottom = sideways, left / right = up and down); **Shift or Alt + a middle handle** stretches that side. You can also type X, Y, W, H, the angle and the two skews (⇋ ⇵) in the options bar. Enter applies it. With a selection that holds none of the layer's pixels, the whole layer is transformed.
- **Move (V) and Paste (2.550.0):** Ctrl+V puts the picture in the middle as a new layer and drops the selection (it sat on the copied area, so the Move tool moved an empty part of the new layer). The Move tool moves the selected pixels, or the whole layer when there is no selection - or when the selection holds none of the layer's pixels.
- **Edit ▸ Transform** rotates or flips the layer.
- **Image:**
  - Adjustments (all 18, applied directly to the pixels);
  - Auto Tone, Auto Contrast and Auto Color;
  - Image Size and Canvas Size (with an anchor);
  - Image Rotation;
  - Crop to the selection;
  - Trim.
- **Filter:** Blur, Distort, Noise, Pixelate, Render, Sharpen and Stylize submenus, 23 filters in all. Each previews live. Ctrl+F repeats the last one.
- Painting, filters and fills go onto the mask while the mask thumbnail is selected, and onto the selection while in Quick Mask.

### Saving

- **File ▸ Save to Images** (Ctrl+S) saves the visible picture into the project's Images.
- **File ▸ Export As** picks PNG, JPEG or WebP, the quality and the scale. It shows a preview and the file's size, and can save to Images or download.
- Copy and paste use Ctrl+C, Ctrl+X and Ctrl+V. Paste in Place is Shift+Ctrl+V and Copy Merged is Shift+Ctrl+C. Pictures from the system clipboard paste in too.

**AI** works like Krita AI Diffusion. The model sees the selection plus a **context** margin around it, scaled to at most the **MP** budget. The answer comes back as a **new layer** that holds the new pixels only inside the **feathered** selection.

- **Generate** regenerates the selection from the prompt, using an inpaint style (FLUX Fill inpaint, SDXL…).
- **Refine** reworks it at a **strength** below 100 %: the shapes stay and the detail changes.
- **Remove** removes what is selected and continues the surroundings. The prompt is optional.
- **Edit** follows an instruction with an edit model: **Qwen Image Edit 2511**, **FLUX.1 Kontext** or FLUX.2 Klein edit ("make her jacket red", "remove the glasses"). With nothing selected it edits the whole picture.
- **Background** keeps the selection and regenerates everything else.
- **Results** makes 1–4 versions. Click one to compare it, then use ✔ **Apply** (Enter) to keep it as a layer, or ✕ **Discard** (Esc).
- **Expand** grows the canvas on one or all sides and selects the new strip. Then Generate continues the picture into it.

If the prompt box in the panel is empty, the main prompt is used. The models download in setup, under *Image editing*.

◈ **Control layers** work like Krita AI Diffusion's. A control layer guides Generate, Refine, Remove and Background through a ControlNet. It is never part of the picture itself: saving and the AI both skip it.

- Pick a type and press **layer**. The types are scribble, line art, soft edge, canny, depth, normal map, pose and segmentation.
- For the line types, draw dark lines on the layer with the brush.
- Or press **From image** to have the type's preprocessor make the layer from the picture. You can then touch it up with the brush or eraser.
- ◈ **active** turns the layer you are on into a control layer.
- Each control layer has a **strength**, a **start / end** range (the part of the sampling where it guides) and its **ControlNet model** from ComfyUI's `models/controlnet`. *auto* picks a model whose name says the type, or else a union / ProMax model.
- Use up to four at once. Untick one to leave it out of the next run.
- Edit models take the picture itself, so control layers are not sent with an Edit.
- From image needs the *comfyui_controlnet_aux* node pack. Canny uses ComfyUI's own node.

**Adjust and ✦ Filter** are menus that work on the active layer, and only inside the selection when there is one (blended by its soft edge).

- **Adjust:** Brightness/Contrast, Hue/Saturation, Levels, Color Balance, Exposure, Vibrance, Black & White, Sepia, Invert, Posterize, Threshold and Auto Contrast.
- **Filter:** Gaussian Blur, Motion Blur, Unsharp Mask, Add Noise, Median, Pixelate, Emboss, Find Edges, Vignette, Glow, Chromatic Aberration and Oil Paint.
- The dialog previews live. **OK** makes the change one undo step, and **Ctrl+F** repeats the last filter.

## Segment Anything, Compose, References and PSD (2.390.0)

**Segment Anything** finds the outline of a thing for you. It runs on this computer. The first time, open **Select ▸ Segment Anything Settings…** and press **⬇ Install**. It downloads the models once, then works offline. The SAM ViT-B model is 375 MB; ViT-H is slower but has better edges. If ComfyUI already has a SAM model in `models/sams`, it is used.

- **Object Selection Tool (W):** click a thing to select it. **Shift**-click adds another thing; **Alt**-click takes one away. Drag a box around something to select what is inside the box.
- **Find:** in the tool's options bar, type words such as *the person's head* or *dog, car*. **Select** selects them; ◐ **Mask** makes them the active layer's mask.
- **Select ▸ Subject…** does the same from a dialog. It can also put each match on its own layer.
- **Layer ▸ Segment Layer…** splits the layer into its parts, each on its own layer in a group. Tick **cut out of the layer** to take them out of the original. Fill in **Only** to keep just the things you name.
- In the **AI** panel, **Select from prompt** and ◐ **Mask from prompt** use the words in the prompt box.

**Compose (layers as references)**

1. **Ctrl**-click the layers you want in the Layers panel. The order matters: **1** is the scene, **2** and **3** are the things to bring in. Each picked layer shows its number.
2. In **AI**, pick **Compose** and an Edit model (Qwen Image Edit 2511 is the default).
3. Write what to make, for example *put the dog from Layer 2 on the sofa in Layer 1*. Layer names in your text are passed to the model as Picture 1, 2, 3.
4. Press **Compose**. ✓ **Apply** keeps the result as a new layer.

**→ References:Layer ▸ Send to References** (or the **→ References** button) puts the picked layers into the reference dock. **Generate** in the prompt docker then uses them, for videos too.

**Seeing the mask while you paint it (2.391.0)**

When a brush paints on a layer mask, the area the mask hides turns red as you draw. The red goes when the stroke ends. **View ▸ Mask Overlay** (**) keeps the red showing the whole time the mask is selected.

**PSD files**

- **File ▸ Open PSD…** opens a PSD, or drop one on the editor.
- **File ▸ Save as PSD…** (Shift+Ctrl+S) saves a PSD. It is kept in the project's `psd` folder and can also be downloaded. **File ▸ Open PSD from Project…** opens it again.
- These come across: layers, groups, masks, opacity, blend modes, visibility and layer styles.
- Text layers and smart objects open as pixels.
- Adjustment layers are left out (the editor says how many). The saved PSD still shows the finished picture.
- Vector masks and path shape layers come across as paths both ways (2.421.0) - see below.

## Pen, paths, vector masks and custom shapes (2.421.0)

The first part of the professional editing features.

**The tools.P** (Shift+P cycles) - the **Pen**: click = a corner anchor, drag = a smooth anchor (its handles mirror), click the first anchor = close, Alt = a cusp (one handle), Shift = 45° steps, Ctrl = Direct Selection for a moment, Enter / Esc leaves the path open. Over the picked path the Pen adds an anchor on a segment and deletes one on an anchor (**Auto Add/Delete**). The **Freeform Pen** draws by hand and fits Béziers (**Curve Fit** px). **Add / Delete Anchor Point** and **Convert Point** (click: curve ⇄ corner; drag an anchor: new handles; drag a handle: a cusp). **A** - **Path Selection** (whole components: drag moves, Alt-drag copies, Delete removes, their operation, **Merge Components**, **Transform…**) and **Direct Selection** (anchors and handles, Shift adds, a box picks several, arrows nudge, Delete removes, Corner / Smooth). **U** - the Shape tool and the new **Custom Shape** tool (heart, star, burst, arrow, chevron, plus, cross, check, lightning, speech bubble, drop, moon, house, cloud, ring, frame - and yours: **Edit ▸ Define Custom Shape…** saves the picked path).

**Shape or Path.** The options bar's **Mode**: *Shape* draws a shape layer (the foreground fills it, the background colour + W strokes it), *Path* draws the **Work Path**. The operation buttons: ▣ New Layer, ⊕ Combine, ⊖ Subtract Front Shape, ⊗ Intersect, ⊘ Exclude - anything but New Layer adds the new part to the active shape layer. The plain Shape tool (rectangle, ellipse …) has the same buttons. Every shape layer becomes an editable path the moment you move one of its anchors.

**The Paths panel** (next to Layers and History): the Work Path, your saved paths, and the active layer's Shape Path / Vector Mask. Click one to pick it (its anchors show with the path tools); **Ctrl-click** = load it as a selection (Shift adds, Alt subtracts). Double-click the Work Path to save it, a saved path to rename it. The buttons: ● fill it with the foreground, ○ stroke it with the brush, ⬚ as a selection, make a work path from the selection, ◇ a vector mask from it, new, duplicate, more, delete (Alt-click ●, ○, ⬚, for their options: opacity / feather, brush / pencil / eraser + simulate pressure, feather + add / subtract, tolerance).

**Vector masks.Layer ▸ Vector Mask: Reveal All / Hide All / Current Path / Disable / Rasterize / Delete**. A vector mask shows its layer inside the path (Reveal All: everywhere except the shapes you draw in it). Its thumbnail sits beside the layer mask's: click it to edit the path, Shift-click turns it off. Properties has its Density, Feather, Invert, Link and Rasterize (into the pixel mask). A linked vector mask moves with the layer.

**Everything follows the picture**: crop, canvas size, image size, rotate and expand move / scale the paths. Every edit is one undo step.

**SVG and PSD.File ▸ Export Path as SVG…**, **File ▸ Place SVG as Shape Layer…** (and ▸ Import SVG as Path…). A PSD keeps vector masks and path shape layers (PSD vector shape layers: the path, the fill, the stroke) both ways.

## Smart objects, smart filters and the transforms (2.422.0)

**Smart objects.Layer ▸ Smart Objects: Convert to Smart Object** (or **Filter ▸ Convert for Smart Filters**) turns the active layer - a pixel, text, shape or fill layer, or a whole group - into a smart object (▣ on its thumbnail). Its layers go inside, still editable; the smart object shows how they look. It is always re-drawn from its contents, so you can scale it down and back up, turn it, warp it, with nothing lost.

- **Edit Contents** (double-click the thumbnail): the inside opens in the editor with a banner - change anything (a text stays a text), ✔ **Done** puts it back into the smart object and every copy of it, × **Cancel** leaves it. A smart object inside a smart object opens the same way.
- **Duplicate Layer** shares the contents (edit one, all change); **New Smart Object via Copy** makes an independent one.
- **Replace Contents…** (a picture file; it keeps the place and size), **Export Contents…** (a PNG), **Convert to Layers** (the inside back as a group - at its own size, unturned), **Rasterize** (plain pixels).
- Properties shows its size, whether it is warped, how many copies share it, and buttons for all of the above.

**Smart filters.** Any **Filter** or **Image ▸ Adjustments** item (and Ctrl+F, Auto Tone …) on a smart object is ADDED as a smart filter instead of changing the pixels. The filters are listed under the layer: turns one off, double-click opens its settings again, right-click sets its opacity, ▲ moves it later in the order, × deletes it. One **filter mask** (its thumbnail on the Smart Filters row) limits them all: click it and paint - black hides the filters there, white shows them; Shift-click turns it off.

**Transforms.Edit ▸ Transform: Skew / Distort / Perspective / Warp** (and **Ctrl+T** on a smart object). The options bar switches between Free (move, scale - Shift keeps proportions -, rotate outside the box - Shift = 15° steps), Skew (corners along their sides, sides slide), Distort (corners anywhere), Perspective (a corner and its partner move in mirror) and Warp (a 4 × 4 grid: drag its points, or drag anywhere inside to bend it there; presets Arc, Arc Lower / Upper, Arch, Bulge, Flag, Wave, Fish, Rise, Inflate, Squeeze with a Bend %). Enter applies, Esc cancels. A pixel layer (or the selection on it) is re-drawn once; a smart object keeps the transform.

**Puppet Warp** (Edit ▸ Puppet Warp): click to place pins on the layer's content (three or more hold its shape), drag a pin to bend - everything between the pins follows naturally; Alt-click or Delete removes

a pin; Density and Show Mesh in the options bar. On a smart object it is a smart filter.

**Content-Aware Scale** (Edit ▸ Content-Aware Scale…, Alt+Shift+Ctrl+C): the layer's content made narrower / wider / shorter / taller by taking out (or doubling) the least important lines of pixels - faces, objects and edges keep their shape. **Protect: the selection** keeps what you selected exactly. The dialog shows a small live preview.

**Liquify** (Filter ▸ Liquify…, Shift+Ctrl+X) opens its own window: **W** Forward Warp (drag to push), **R** Reconstruct (paint changes back), **C** Twirl (Alt = the other way), **S** Pucker, **B** Bloat, **F** Freeze Mask (red = nothing moves there), **D** Thaw Mask; Size ([ and ]), Pressure, Restore All. OK applies (Enter), Cancel (Esc). On a smart object it is a smart filter - double-click it to carry on.

## Selections: Select and Mask, Magnetic Lasso, Quick Selection, Sky, Channels (2.423.0)

**Select and Mask** (Select ▸ Select and Mask…, Alt+Ctrl+R) opens a workspace of its own. Paint with **Quick Selection** (W - it grows to the edges; Alt takes away), **Refine Edge** (R - paint over hair or fur: the edge is searched there) and **Brush** (B - by hand); ☁ Sky and ⇄ Invert at the top. On the right: the **View** (Overlay red, On Black, On White, Black & White, On Layers) and its opacity; **Edge Detection**: Radius (the band the real edge is looked for in - a sloppy selection snaps onto the picture's edge) and Smart Radius; **Global Refinements**: Smooth, Feather, Contrast, Shift Edge; **Output**: Decontaminate Colors (the coloured fringe of the old background taken out of the edge) and Output To: Selection, Layer Mask, New Layer, New Layer with Layer Mask. Enter = OK, Esc = Cancel.

- **Magnetic Lasso** (L, Shift+L cycles): click, then move along an edge - the line snaps to it, points fall every Frequency px (click to set one, Backspace takes the last back); double-click, Enter or the first point closes it. Width, Contrast, Frequency in the options bar.
- **Quick Selection** (W): paint - the selection grows to the edges under the brush; the first stroke makes a new selection, the next ones add, Alt takes away. Tolerance; Auto-Enhance smooths the edge after each stroke.
- **Select ▸ Sky**: the sky (blue, overcast or a sunset) reaching the top edge, soft along the skyline.
- **Channels** (a tab next to Layers / Paths): RGB, Red, Green, Blue - click one to see it alone (Ctrl+2 … Ctrl+5), Ctrl-click for its lightness as a selection. **Alpha channels** are saved selections: **Select ▸ Save Selection…** (new, or into a channel: replace / add / subtract / intersect), **Select ▸ Load Selection…** (invert, the operation); click one to see it, Ctrl-click to load it, double-click to rename. They undo, and follow crop / image size / rotate.

## Retouching: Patch, Content-Aware Move and Fill, Red Eye, Mixer Brush, erasers, healing (2.423.0)

None of these use AI - the picture is filled from itself (PatchMatch) and blended in (Poisson), all in the page.

- **Spot Healing Brush** (J): Type **Content-Aware** (filled from what is around it) or Proximity Match (the old way).
- **Healing Brush** (J): Alt-click the source, paint - the copy now takes the colour and light of where it lands (only its texture comes from the source).
- **Patch** (J): draw round what to fix (or select it), then drag it onto clean texture: it takes that texture, blended (Patch: Source). Destination does it the other way round.
- **Content-Aware Move** (J): select a thing, drag it - it moves, its old place is filled from around it (Mode: Move), or it is copied (Extend).
- **Red Eye** (J): click the red pupil; Pupil Size, Darken Amount.
- **Edit ▸ Content-Aware Fill…** and Content-Aware in **Edit ▸ Fill…**: the selection filled from the rest of the picture, onto the layer or a new one.
- **Mixer Brush** (B): the paint picks up the canvas's colour as it goes - Wet, Load, Mix, Clean after each stroke.

- **Background Eraser** (E): erases what is like the colour under the brush's centre (Continuous / Once, Tolerance, Protect Foreground Color).
- **Magic Eraser** (E): a click erases the area of that colour (Tolerance, Contiguous).

## The Gradient Editor, Layer Comps, smart filter blend modes (2.434.0)

- **Gradient Editor** (Edit ▸ Gradient Editor…, the Gradient tool's gradient button, a Gradient fill layer's Properties, Object Properties for a vector shape): 12 presets (Foreground to Background, Foreground to Transparent, Black / White, Spectrum, Transparent Rainbow, Chrome, Copper, Gold, Sunset, Violet / Orange, Blue / Red / Yellow, Transparent Stripes) + your own (**New** keeps one; right-click deletes it). The bar: **click under it = a new stop** (the colour there), **drag a stop** = move it, **drag it down off the bar = delete it** (two stay at least). The picked stop: **Colour** (or "foreground" / "background" - it follows the swatches), **Opacity**, **Location**; Delete, ⇄ Reverse, Distribute evenly. The Gradient tool / Paint Bucket then use Colours: **Custom**; a fill layer or a shape keeps the stops (a shape's SVG too).
- **Layer Comps** (Window ▸ Layer Comps, the Comps tab beside History / Actions): keeps the layers' state - name, what it applies (Visibility, Position, Appearance = Layer Style / opacity / blend mode) and a comment; ▶ on a comp applies it (one undo step), ◀ ▶ the previous / next, ↻ updates the picked one from the layers now, deletes; double-click = its options. **Last Document State** brings back the layers as they were before. Each document keeps its own comps.
- **Smart filter blend modes**: right-click a smart filter (under a smart object in Layers) = **Blending Options**: Mode (24: Normal, Dissolve, Darken, Multiply, Color Burn, Linear Burn, Lighten, Screen, Color Dodge, Linear Dodge, Overlay, Soft / Hard / Vivid / Linear / Pin Light, Difference, Exclusion, Subtract, Divide, Hue, Saturation, Color, Luminosity) + Opacity; the row says the mode.

## The image editor and the prompt docker: Image mode, generated pictures onto the canvas (2.431.0)

2.549.0: **a Generate in image-edit mode is always a NEW LAYER**. With no selection the prompt docker's own Generate runs with the style picked there (Krea 2 …) and the picture comes in as a new layer; with a selection the editor fills it, as a new layer too. It no longer paints into the selected layer.

2.550.0: **a selection is filled SEAMLESSLY**, the way the Krita AI plugin does it: the prompt docker's style (Krea 2, the FLUX.2 / FLUX 3 Klein styles, Qwen …) runs its own graph with the picture around the selection encoded and a noise mask on the selection (plus differential diffusion for a soft edge), so the new part continues what is there instead of being a new picture. Checkpoint styles (SDXL …) keep the SDXL inpaint export; a style's own inpaint workflow still wins. Refine (a strength) works the same way.

2.551.0, closer to the Krita AI plugin: the region sent around a selection is bigger (at least 3/4 of the selection's size on every side, about 512 px across), the selection is **pre-filled with the colours around it** before it is encoded, the mask is grown and **blurred** (a soft edge), and a style that was not trained to inpaint (Krea 2, Klein, Qwen …) starts just below full noise (0.9) so the new part keeps the light and colours of what is around it. For the best fills use a real inpaint model - FLUX Fill inpaint, or the SDXL inpaint export (the Krita plugin uses inpaint models too: Fooocus inpaint for SDXL, a ControlNet inpaint for SD 1.5, Flux Fill).

2.552.0, from the Krita AI plugin's own code:

- **Generate** in a selection runs at **full strength** again (as Krita does with a model that was not trained to inpaint - the picture around the selection is kept while the model draws, so the new part is drawn into it). **Remove** starts at 0.9 from the colours around the selection.
- A small selection's region is **rendered bigger** (at least about 0.75 megapixels, at most 4x) and scaled back - a 512 px region of a model trained at 1 megapixel comes out muddled.
- The mask's soft edge **grows with the selection**: feathered by 10 % of the selection's diagonal (at least 32 px) and grown by 4 px + half of that, as in Krita. Refine uses less (times its strength).
- When the model kept the picture around the selection, the result is **blended a little past the selection's edge** (no visible line) and **colour-matched** to the picture around it (Krita's Color Match).

- **Edit** (Qwen Image Edit, FLUX Kontext, FLUX.2 / FLUX 3 Klein edit) inside a selection now changes **only the selection**: the picture is the model's reference and also its starting point under the same soft mask, so everything around the selection stays exactly as it was.

2.553.0 - **fill with the edit model (sees the picture)**, in the AI panel, on unless you turn it off: Generate, Remove and New background in a selection run through the **edit model** (the prompt docker's style when it can edit - FLUX.2 / FLUX 3 Klein, Qwen Image Edit - else the panel's Edit model). A model that was not trained to fill (Krea 2 …) cannot see the picture around a selection and draws a picture of its own into it; the edit model looks at the whole region, so the new part belongs in the scene. As in the Krita AI plugin, the selection is painted **green** and the model is told "Fill the green spaces according to the image." followed by your prompt (Remove: "Remove the object.", New background: "Replace the background while keeping the main subject."), and only the selection changes. A real inpaint style (FLUX Fill inpaint, the SDXL inpaint export) is always used as it is.

- ▾ **Edit** with a selection changes **only the selection** (a new layer over it). Without a selection it edits the selected layer - a layer with transparent parts keeps its outline: only its own pixels change, nothing is added around it.
- 2.554.0: a style that cannot see around a selection (Krea 2 …, with off or no edit model) gets the **selection's own box** as its whole picture (plus a little room for the soft edge), rendered at the model's size and scaled back - so what it draws is the size and place of the selection, not a bigger picture cut down.

**2.555.0 - the Krita AI plugin's fill, per model family.** Each family gets the helper the Krita plugin uses - a part that was *trained* to fill - when ComfyUI has it:

- **SDXL / Pony**: the Fooocus inpaint patch (the style's OWN checkpoint fills - Pony stays Pony).
- **Illustrious / NoobAI**: the NoobAI inpainting ControlNet (else the Fooocus patch).
- **SD 1.5**: the SD 1.5 inpaint ControlNet. **FLUX.1**: the Alimama FLUX inpainting ControlNet.
- **Remove** (any style): MAT / LaMa takes the object out first.
- **FLUX.2 / FLUX 3 Klein, Qwen, Krea 2**: no helper - with on they fill through the edit model (as before).

Also as in Krita: the region the model sees (the selection padded by its feather, then by max(the picture's long side / 16, half its size), at least 512 px), and the **fill** row for Generate - **Add content** (the default: something new goes there; the selection starts grey, with the edit model "Add the object to the scene.") or **Fill** (the picture continues there; the selection starts as a blur of what was there). A selection across a whole side of the picture expands it. **What to install** (the setup wizard lists both): the node pack **comfyui-inpaint-nodes** (in the setup's node list) and, from the setup's model list group **Selection fill - the Krita AI way**: the Fooocus inpaint head + patch (models/inpaint), MAT (models/inpaint), and the inpainting ControlNets you need (models/controlnet). If the Krita plugin already downloaded them, add Krita's ComfyUI models folder in Settings → ComfyUI → Folders instead of downloading them again.

**2.556.0 - Pending: queue as many as you like.** Generate, Edit, Refine, Fill, Remove, New background and Compose never wait for the last one any more - press again (another selection, another prompt, another layer) and the new renders queue behind the others. Every result lands in **Pending**, a small docker that floats *inside* the image editor (drag it by its title; ✕ hides it, the AI panel's **Pending** button shows it again, and every new render brings it back). Each card shows the result over the area it was made for (click the picture to preview it over the canvas), what it was and which layer it belongs to:

- ✔ **Apply** puts it on a new layer **above the layer that was selected when you asked for it** - inside one group per layer, **" changes: <layer>"**, made the first time and reused after that (each Apply is one undo step).
- **Delete** throws it away. ✔ **all** / **all** in the title bar do every card.

**The References docker in every mode (2.556.0).** Name a reference picture in the prompt by its number in the docker - "picture 1", "image 2", "ref 3" - and it goes along:

- **Edit**: up to two pictures (the ↳ reference dropdown still works as before: that picture is "Picture 2").

- **Generate / Fill / Remove / New background / Refine**: the run goes through the **edit model** (only an edit model can take pictures), the selection is filled using them, and the numbers are rewritten for the model ("picture 3" in the docker becomes the model's "Picture 2"). With no edit model the pictures' descriptions are added to the prompt instead.
- **Compose**: write "ref 1" / "reference 2" (in Compose "picture N" means the N-th picked layer); the picture is added after the picked layers (three pictures in all).

Also fixed: the editor's settings from 2.552.0-2.555.0 (the mask sizes, fill with the edit model, Add content / Fill) were dropped on the way to the server - they reach it now.

2.557.0: the files the Krita-way fill needs download from **Settings ▸ Add-ons ▸ AI fill models** (tick, Download ticked).

- While the image editor is **open** (on screen, not collapsed) the prompt docker's Generate mode is **Image**, and a → ▦ **canvas** chip beside it says where the pictures go. When the editor closes the mode it was in comes back (a mode picked while it was open is kept). Opening / closing the editor is what switches it; the project keeps the mode you picked, not the editor's Image.
- **Every picture a Generate makes while the editor is open lands on the canvas**: a new layer on the document in front, named after the prompt ( a red fox ...), centred - scaled down when it is bigger than the canvas. A render that makes several pictures gives a layer each. No document open = the first picture opens as one. Each layer is an undo step; the gallery keeps the pictures as always. With the editor closed nothing is added.

## Documents (floating windows / tabs), the colour palette, ⊠ transparent, auto-fill (2.430.0)

- **Every New / Open is a document of its own** (File ▸ New, Open, Open PDF, a PSD, a picture dropped in, Paste into an empty editor). The first one docks - it fills the canvas room, with a **tab** above it; the next ones open in their own **floating window** (cascaded) - a "modular docker" over the canvas room. Window ▸ Arrange ▸ Open Documents as Tabs makes every new one a tab instead.
- Each document keeps its own layers, undo / redo (History), selection, paths, channels, zoom and a PDF's pages; the one in front is the one the tools, the panels and AI work on.
- **Tabs**: click = to the front; × or a middle-click = close; ● = changes not saved; drag a tab off the strip = it floats there.
- **Windows**: drag the title bar (dropped on the tab strip = docked as a tab; a double-click on it docks too), ⇲ = dock, × = close, the bottom-right corner resizes. A window in the back shows its picture as it was left - a click brings it to the front (the canvas moves into it).
- File ▸ **Close** (Ctrl+W) / **Close All** (Alt+Ctrl+W): unsaved changes ask - Save and close / Close without saving / Cancel. Window ▸ Arrange: Consolidate All to Tabs, Float in Window, Float All in Windows, Tile, Cascade, **Next / Previous Document** (Ctrl+Tab / Shift+Ctrl+Tab). File ▸ Automate ▸ Batch closes each picture when it is done (the documents you had open stay).
- **The colour palette**: the strip down the right edge of the editor - ⊠ first, then the colours; ▲ ▼ / the wheel scroll it; ▾ picks the palette (Default, Greys, Your Swatches, Document Colours); Window ▸ Color Palette shows / hides it. On a curve, a shape or type (every picked one - Ctrl-click in Layers - or the active one): **click = its fill, right-click = its outline**, ⊠ = none - one undo step. On anything else: click = the foreground colour, right-click = the background colour.
- ⊠ **transparent** (the palette and the Swatches panel): as the foreground a brush paints transparency, the Paint Bucket and Edit ▸ Fill clear; the swatch shows it with a red line.
- **Auto-fill**: a curve closed with the Bézier, Pen (F5), Freehand, Polyline, 3-point curve, B-spline or Curvature tool, a new F6 shape, a Pen / Shape tool shape - is filled straight away with **the colour picked last** (the palette, a swatch, the colour pickers, the eyedropper). ⊠ picked last = not filled. The curve tools' property bar: ▨ = auto-fill on / off (on by default).

## Dockers: Transform, Shaping, Align and Distribute, Object Properties (2.429.0)

Window ▸ Dockers opens a panel group of their own (✕ closes it). They work on the **picked** layers (Ctrl-click in Layers picks several) or the active one.

- **Transform** (Alt+F7): Position (x / y, Relative position), Rotate (angle, + = counter-clockwise), Scale & Mirror (%, proportional, ⇆ ⇅), Size (w / h, proportional), Skew (x° / y°) - about one of the 9 points of the box (Relative center), **Copies** (each copy one more step - 2 copies of a 30 px move = a row of three). Vector shapes / lines / paths exactly (a live shape stays live when only moved / scaled), pixel layers re-drawn, type moved and sized. Each Apply is one undo step.
- **Shaping**: Weld, Trim, Intersect, Simplify, Front Minus Back, Back Minus Front, Boundary - on the picked vector shapes; the active one is the target, the result takes its look; Leave original source / target.
- **Align and Distribute** (Shift+Ctrl+A): align left / centres / right / top / middle / bottom to the active object, the first picked, the selection's box, the page edge or the page centre; distribute left / centres / right / spacing, top / centres / bottom / spacing - over the selection or the page.
- **Object Properties** (Alt+Enter): the active vector shape's fill (none, uniform, linear / radial gradient with two colours and an angle - kept in SVG too), outline (width, colour, style, F12), transparency (opacity, blend mode).

## Drawing tools: shapes (F6), Artistic Media, dimensions and connectors (F8) (2.428.0)

Everything they draw is a vector line layer - the outline pen (F12), the fill, the Shape tool (F10) and Convert to Curves (Ctrl+Q) work on all of it.

- **F6** (again = the next): **Rectangle** (corner radius per corner - changes all four - and Round / Scallop / Chamfer corners), **3-Point Rectangle** (drag one side at any angle, let go, click the height), **Ellipse** (Ellipse / Pie / Arc with start and end angles), **3-Point Ellipse**, **Polygon** (sides), **Star** (points, sharpness), **Complex Star** (points, sharpness - its middle open), **Spiral** (revolutions, symmetric / logarithmic, expansion), **Graph Paper** (columns x rows), **Common Shapes** (basic shapes, arrows, flowchart, banners, callouts). Ctrl = square / circle, Shift = from the centre. They stay **live**: pick one and the property bar changes it, until F10 edits a node or Ctrl+Q converts it to curves.
- **Artistic Media** (in F5): draw a stroke and it becomes a filled shape - **Preset** (Taper, Teardrop, Flare, Uniform) and its width, **Calligraphic** (nib width and angle), **Pressure** (a pen's pressure; with a mouse, slower = wider), **Sprayer** (stars, dots, leaves, hearts, bubbles or confetti along the stroke - size, spacing). It stays live too.
- **F8** (again = the next): **Parallel Dimension**, **Horizontal / Vertical Dimension** (click the two points, then where the dimension line goes - above / below = horizontal, beside = vertical), **Angular Dimension** (the vertex, a point on each arm, where the arc goes), **3-Point Callout** (the point, the elbow, the end - the text from the bar). Units px / mm / cm / in at a dpi, decimals, text size. **Connector** (Straight / Right-angle / Rounded right-angle): drag from one object to another - it snaps to the middle of their sides (or their centres) and **follows them when they move**.

## Actions and Batch (2.427.0)

The **Actions** tab sits next to History (Window ▸ Actions, Alt+F9). Sets () hold actions (▶), actions hold steps.

- **Record**: pick an action (or New Action - recording starts at once), then work: every menu command, shortcut or palette command is a step, with the settings of the dialog it opened when you press OK (Cancel = no step); filters and adjustments with their settings; the Layers panel's buttons, blend mode, opacity and fill. ■ stops. Painting and selecting by hand are not recorded - Select menu commands are.

- **Play**: ▶ plays the picked action, or from the picked step. ☑ switches a step off; ▢ (the dialog toggle) makes a step stop in its dialog so you can change it (OK carries on, Cancel stops the action). A step that cannot run (no layer, no selection) stops the action and says which step and why.
- **Edit**: ▲ ▼ move, deletes; double-click a step to record its dialog's settings again, an action for its name and function key (F2 … Shift+F12 - the keys the editor does not use), a set to rename it. : Insert Stop (a message, with or without Continue), Insert Menu Item, Duplicate, Button Mode (a button per action), Load / Save Actions (.json - .atn files cannot be read), Reset Actions, Batch. A **Default Actions** set comes with it (Vignette, Sepia Toning, Black & White Punch, Soft Glow, Sharpen + Flatten). Actions are kept with the app.
- **File ▸ Automate: Batch…** plays an action on many pictures: pick files or a folder, what to do on an error (stop, or log it and go on), where the results go (the project's batch folder, the image gallery, a download each, or nowhere), the folder name, a suffix for the file names, PNG or JPEG. A progress box (■ Stop) and a report at the end.

## Character and Paragraph panels, paragraph text, type styles (2.426.0)

Two tabs next to Color / Swatches (Window ▸ Character, Window ▸ Paragraph). They edit the active text layer - every change is one undo step - or, with no text layer picked, the settings the next text starts with.

- **Character**: font and style (Regular / Bold / Italic / Bold Italic), size, leading, kerning (Metrics / 0), tracking, vertical and horizontal scale, baseline shift, colour; Faux Bold, Faux Italic, All Caps, Small Caps, Superscript, Subscript, Underline, Strikethrough.
- **Paragraph**: left / centre / right, Justify last left / centred / right, Justify all; indent left, right and first line; space before and after a paragraph; Hyphenate.
- **Paragraph text**: drag with the Type tool (T) to draw a box - the text wraps inside it (a click still makes point text). Justified lines need a box. Text that does not fit is hidden and the box's corner shows ⊞ (the Paragraph panel says so - make the box larger with W / H). Layer ▸ Type: Convert to Paragraph Text / Convert to Point Text (lines that did not fit are left out). Image Size scales the box and indents too.
- **Character Styles / Paragraph Styles** (the lists in the two panels): makes a style from the text, a click applies it (the text remembers it), + after its name = the text was changed since (⌫ Clear Override puts the style back), Redefine updates the style from the text and every text using it, deletes, double-click renames. Styles are kept with the app.

## Vector lines: the Bézier, curve tools and Shape tool (2.425.0)

The keys: **F5** picks the curve tools (F5 again = the next one), **F10** the Shape tool, **F12** the Outline Pen, **Ctrl+Q** Convert to Curves. Every curve tool draws a **vector line** - a layer that stays sharp at any size, with an outline pen - or carries the active line on when you start on one of its open ends.

- **Bézier** (F5): click = a cusp node (straight segments), drag = a smooth node (a curve; while dragging **C** makes it a cusp so the next segment can turn, **S** smooth again). Ctrl = 15° steps. Click the first node to close it; double-click, Enter or Space = done; Esc drops the line being drawn.
- **Freehand**: drag = a freehand line (Smoothing in the bar); click, click = a straight line.
- **2-Point Line**: drag from start to end. **Polyline**: clicks = straight segments, a drag = a freehand stretch, double-click ends. **3-Point Curve**: drag the chord, let go, click where it bends through. **B-Spline**: click control points - the curve follows them smoothly, and stays a B-spline for the Shape tool. **Node Pen**: the Bézier with the next segment shown, and nodes added / deleted with a click on the active line.
- **The property bar** (every curve tool and the Shape tool): outline width, colour, style (solid, dashed, dotted, dash-dot, long dash, custom), start and end arrowheads (arrow, triangle, open, half, circle, square, diamond, bar), fill for closed curves, ✒ F12 and ⇢ (to a path).
- **Shape tool** (F10): click / Shift-click / drag a box round nodes; drag nodes, handles (cusp, smooth and symmetrical nodes - square, round and diamond markers) or a segment (it bends).

Double-click the line = add a node, a node = delete it; + / - / Delete; C / S / Y = cusp / smooth / symmetrical; arrows nudge. The bar: add, delete, join two nodes, break curve, to line, to curve, the node types, reverse direction, extend curve to close, extract subpath, auto-close, reduce nodes (with a smoothness slider), select all. It works on any shape layer and on paths; a B-spline shows its control points.

- **Outline Pen** (F12, Layer menu): colour, width, style + custom dashes (in widths), corners and miter limit, caps, position (outside / centred / inside), arrowheads + size + swap, the fill, behind fill, scale with object. With no shape layer active it sets the outline for the next lines.
- **Convert to Curves** (Ctrl+Q): a rectangle, ellipse, polygon, line or custom-shape layer becomes an editable vector line (its look kept).
- **Vector line ⇄ path**: Layer ▸ **Vector Line: Convert to Path…** puts the line in the Paths panel as a saved path that remembers its outline pen (keep the layer or not); **Vector Line: Make from Path…** (or the Paths panel's ) turns a path into a vector line - one that came from a line comes back exactly (name, width, dashes, arrowheads), any other path takes the curve tools' outline. Every step undoes.
- **Files**: Export Path as SVG… writes a vector line with its dashes and arrowheads (and its outline pen, so Place SVG as Shape Layer… brings it back as a line). In a PSD it is a vector shape layer with a PSD stroke (width, colour, dashes, caps, corners, position); a PSD has no arrowheads, so bitGen keeps the outline pen in the file's XMP and restores it when it opens the PSD.

The path side of it: the **Curvature Pen** (P, Shift+P cycles) - click points and the curve bends smoothly through them; double-click a point = corner / smooth; drag one to move it; Enter / Esc ends. The Pen's **Rubber Band** option shows the next segment before you click. **Path Selection** (A) can **align** the picked components (left, centres, right, top, middle, bottom - to each other or to the canvas) and **distribute** them evenly.

### PDF files: open, edit, save (2.424.0)

**File ▸ Open PDF…** (or drop a .pdf on the editor) opens a PDF in the editor; **File ▸ Open PDF from Project…** opens one saved before. The **Pages** strip comes up on the left (✎ = a page you changed); click a page to open it. A page opens as:

- a **Background** - the page's picture *without its text* (the text is taken out of the page itself, not painted over), and
- one **type layer per line of text**, where it was, with its font matched (serif / sans / mono, bold, italic), its size, its colour and its width.

Edit with every tool - retype a line, move it, paint, add layers. Each page keeps its own layers and undo while you move between pages - also when you open another picture in between (File ▸ PDF Pages brings the strip back). dpi in the strip sets how sharp pages not opened yet open (72 - 300, 150).

**Save PDF** (File ▸ Save PDF) saves the changed pages back into the original - the project's copy of it in its pdf folder - and downloads it; **Save as New…** makes a new file. Pages you did not change stay exactly as they were (still vector). A changed page becomes its picture with its type on top as **real PDF text** (Helvetica / Times / Courier in the matching weight and style, colour, size and spacing) - selectable and searchable. Type those fonts cannot write (other alphabets, warped / 3D / path text, layer styles, masks, a blend mode) is drawn into the picture instead - the save says how many. pdf.js and pdf-lib do the reading and writing in the page; nothing goes to the internet.

## Music, stems and voices

- **Music** docker — a song from lyrics and a style (MiniMax Music3 through ComfyUI, or YuE2), covers and sheet music.
- **Stems** — split a song into vocals / drums / bass / other (demucs).
- **Voices** — clone a voice from a short clip or a waveform region, then speak text with it (OmniVoice); transcribe speech with faster-whisper; **Speak** dictates into the prompt.

## Timeline and export

Drag clips, songs and pictures onto the **Timeline** layers, trim and move them, add transitions, and compile the timeline into one video in the project folder.

## The menu bar

The row of buttons under the title bar: **✚ New**, load, save, screenshot, record, recycle bin, ↺ reset project, ⚙ settings, ⏏ eject every loaded model. It stays put whichever docks are shown or hidden.

## Path layers (2.387.0)

- **Path layer** → draw the path with **(Shift+P)** (click points, drag to move, Alt-click to remove) → in its panel write what follows it (animal / person / vehicle), Start / Length, Size at start → end, pace, facing → **Generate**.
- **In place + follow path**: picture on green → video on the spot (your video style) → green cut away → clips moved along the path with keyframes (mirrored when it turns back), looped as needed. **Place again** after editing.
- **Along the path (Wan ATI)**: needs a Wan 2.1 style and `Wan2_1-I2V-ATI-14B_fp8_e4m3fn.safetensors`; the model makes it travel the path; one full-frame see-through clip.
- **Cut out**: AI matte (⬇ Install AI matte: venvs/matte, rembg + BiRefNet) or chroma key. Each layer is see-through.

## The camera path: pan, tilt, roll, dolly, height, a 3D path (2.399.0)

**Camera** on the timeline bar opens the Camera panel. Like Basic Settings, it is a docker of its own: float it, or drop it beside or inside another docker. The tool in the canvas toolbar (**Shift+C**) draws the camera's frame on the picture at the position marker.

**Making the move**

- **Preset ▸ Apply**: push in, pull out, truck left / right, pedestal up / down, pan, tilt, roll, orbit, crane up / down, zoom in / out, fly in.
- **Camera / Top / Side** shows what the camera sees, and the path from above and from the side. In Top and Side, drag a point to move it, or click empty space to add one. **Point** and **× Point** add and remove points.
- ▶ and the slider play and scrub the move. The timeline's marker follows.
- **Pan, Tilt, Roll, Height, Dolly, Lens**: the values at that moment. Changing one writes a **◆ key** there, and the camera moves smoothly between keys. **◆ Key**, **× Key** and **◀ ▶** add, remove and step between keys.
- **Aim**: straight ahead, at the picture's centre (an orbit keeps looking in), or along the path. **Ease**, **Length** (= **Seconds** matches Basic Settings) and **From** (where it starts on the timeline).
- **With the tool on the canvas**: drag to pan and tilt, Alt+drag to roll, Shift+drag to change the height, the wheel to dolly, Shift+wheel to zoom. Each one writes a key at the marker.

**Telling the video models**

Tick **Use in Generate**, and the prompt docker's Generate passes the camera on. None of the three models takes a free 3D camera path, so each gets what it can follow:

- **MiniMax H3** gets its own camera sentence, for example "The camera pushes in with large amplitude at slow speed." It takes **one move per shot**, so it is told the main move.

- **Wan** gets the moves in words. With a **Fun Camera** model in ComfyUI (`wan2.2_fun_camera_high/low_noise_14B`, or a Wan 2.1 Fun Camera model) and a picture in the reference dock, it also gets that model's move: Zoom In/Out, Pan Left/Right/Up/Down, or a clockwise or anticlockwise roll.
- **LTX** gets the moves in words. With the matching **LTX-2 camera-control LoRA** in ComfyUI's loras, it also gets that LoRA: dolly in, out, left or right, jib up or down, or static. For example, `ltx-2-19b-lora-camera-control-dolly-in.safetensors` comes from `Lightricks/LTX-2-19b-LoRA-Camera-Control-Dolly-In`.

The panel's **What the models are told** shows all of this, plus what ComfyUI has installed.

**The exact path (guide video)**

1. **Use picture** takes the first reference picture, or the timeline canvas at the marker. It is kept in Assets.
2. ◐ **Depth** makes its depth map with Depth Anything V2 through ComfyUI. This needs comfyui_controlnet_aux. **Relief** sets how far the near parts stand out.
3. **Make guide** flies the picture along the path and saves two videos to Assets: `camguide_<id>_rgb.mp4` (what the camera sees) and `_depth.mp4` (its depth).
4. Tick **Exact path**. Generate then sends the guide too:

   – **MiniMax H3**: the RGB guide becomes a reference video, and the prompt says to follow its camera. This works in References renders only (a First / Last render takes no video) and is **experimental**.

   – **Wan**: the depth guide becomes **VACE**'s control video, with the first picture as its reference. This needs a VACE model.

   – **LTX**: the depth guide runs through the **style-transfer** mode as its depth guide, with the first picture as the first frame.

If you change the path or the picture, the guide is marked ⚠ and Generate leaves it out until you make it again.

## Upscaling a video with SeedVR2; the queue's running card (2.400.0, Enhance 2.401.0)

**SeedVR2** on the preview bar upscales the video you are watching (a gallery video, a Video asset or an export) with ComfyUI's own SeedVR2 nodes:

- **Size**: the short side (720p, 1080p, 1440p, 4K, keeping the shape) or a factor (×2, ×3, ×4). The panel shows the result size before you start.
- **Colour match**: lab (the most faithful), wavelet, adain or none.
- **Temporal split**: auto cuts a long clip into pieces that fit your graphics card's free memory and blends them back together; or a fixed piece length; or off.
- **Model**: *best available* uses `seedvr2_7b_sharp_fp16.safetensors` when ComfyUI has it, else another SeedVR2 7B, else the 3B. **Setup → Models → Upscaling** downloads it (16.5 GB), the smaller 3B int8 and the SeedVR2 VAE.
- **Denoise**: 1 restores fully; lower keeps more of the original texture.

**Upscale** queues it as its own job. The result keeps the original's sound and lands in the gallery as `<name>_seedvr2_<size>p.mp4`. Your choices are kept for the project.

**For the scene board**: in the StoryBoard's ⚙, set **Upscaler** to **SeedVR2 (video)**. A scene's then sends its take (the lossless master when there is one) through SeedVR2 at the ⚙'s **Upscale resolution**, and files it as the scene's upscaled take. This works for any video style. With **Upscale every render** ticked, each take is queued for SeedVR2 as soon as it lands.

**Enhance** in the prompt docker opens the same panel for the **selected video**: the last one you clicked in the gallery, the Video assets or the reference dock. The tile gets a dashed ring, and the button's tooltip names the video and where it is. If nothing is selected, the panel asks you to click one. Click another video while the panel is open and it switches to that one. (The LLM prompt rewrite

moved to **Enter** in the prompt box.)

**The queue docker** shows a render that is running as **one card**: its status and ▲ ▼ × buttons, the prompt, the job's id, mode and size, a progress bar, and "chunk 1/2 · step 3 of 8 · 1:11 · 19%". Click the card to follow it in the console and the preview. The job list below no longer repeats it.

## The video style in Basic Settings (2.401.0)

The top of Basic Settings shows the video style the prompt docker's Video dropdown has picked. Pick another style there and it changes in both places. The card shows:

- what kind of style it is (MiniMax H3, Wan 2.1 / 2.2, LTX 2.5) and its workflows;
- **Model**, with one row per phase (Wan 2.2: high noise and low noise), and the model it actually renders with. A blank model means the workflow's own, and the card names that file. Wan picks its own files from what ComfyUI lists;
- each phase's steps, cfg and load precision, plus the text encoder, VAE, LoRAs and negative prompt.

Pick another model in a row and it is **saved into the style**, so the next render uses it. browses ComfyUI's model folders. ⚙ opens the full style editor in Settings → Video.

## The statusbar's docker buttons, the 3D toolbar (2.386.0)

- Every docker has a statusbar button (Stems, SFX and Chat now too). A button is **lit while its docker is on screen** (open or collapsed); a click hides the docker, another shows it again.
- Select a 3D layer: a **3D toolbar** appears along the top of the preview canvas - widget (✥ ○), snap 15°, views (front / left / right / top / bottom / back, 0), spin, reset depth + scale, material preset, ☀ studio lights + brightness, add a light, ◇ Key, Blender, ⚙, Bake.

## Tools & Properties, keyframes, 3D widgets, lights, materials, Blender (2.385.0)

- **Tools & Properties** float in their own window: **1** shows / hides it (or in the timeline bar, × on its titlebar); drag it by the titlebar, resize by the corner.
- ◆ **keyframes** drag along their clip (never past their neighbours: first ◆ 0 .. next − 1 frame, last ◆ previous + 1 frame .. the clip's end). Right-click / Alt-click / Delete removes one.
- **3D widgets** (Move tool, a 3D layer selected): **G** move (X / Y across, blue Z toward the camera), **R** rotate (ball = tumble, rings = X / Y only, outer ring = roll), **S** scale (its own X / Y / Z, centre = even). Same key again hides it.
- **Material**: presets (gold, chrome, glass, neon …) or colour / metal / rough / glow / opacity / coat / glass / wireframe / flat / texture; a model's parts can each keep their own, use the layer's or a preset.
- **Lights**: studio lights on/off + brightness, and Point / Spot / Sun / Ambient / Sky with colour, brightness slider and position.
- **Blender**: install the **bitgen-blender-addon** zip in Blender (Preferences → Add-ons → Install from Disk) → sidebar (N) → bitGen: Send to bitGen (glTF, "Add as 3D layer"), Live link (re-send on Save), Get from bitGen. A 3D layer's **Render with: Blender** renders it in Blender (Eevee / Cycles) for the compile; ⚙ sets Blender's path. (2.402.0) **Render scene → bitGen** renders a whole Blender layout through its camera and has LTX 2.3 + 3DREAL make it photoreal - see *LTX 2.3 and 3D render → real*.

## Seeds and render details

- **Basic Settings → Seed**: -1 = a random seed every render; type a number to use that seed; = random again; ♻ = the last seed used (shown under the box).

- **Queue**: a running job shows *step n of total · time*. A finished job has — its seed, CFG, steps, sampler, model, LoRAs, size, render time and prompt; ♻ **Use** puts its seed in Basic Settings.
- **Preview dialog** (click a gallery picture or clip): the same details in a pane on the right ( hides it).
- **StoryBoard ⚙ → Seed**: *Random for each scene* or *Same seed for every scene* (the seed box; blank = the last seed used); ♻ sets the last seed used as the seed.
- **Each scene card** has its own seed box (it wins over the ⚙); ♻ beside it reuses the seed its last take used. While a scene renders it shows *running step n of total*, a progress bar and the time; a finished one shows its render time and seed.
- The pins are lit until a dock is pinned, then dim. **on a pinned dock** sets its max-height back to 0: drag it to any height, then again to pin that height. A pinned dock can still be made smaller by its seams, never taller than its pin. A pinned video dock keeps its height (it stops taking the left-over room until unpinned).

## The position marker, layer colours

- **Drag the red marker** (its head or its line) to move around the timeline at will: a playing preview carries on from where you drop it; stopped, the previews show that frame. **Double-click a time** on the ruler or a track to jump there and play from there. Play / pause / stop are under the preview canvas.
- Each layer has its own colour; the selected layer is outlined. The F/L and REF marker rows grow with the zoom.

## Layer names

Double-click a layer's name in the timeline canvas's Layers list and type (Enter keeps it, Esc cancels), press F2 for the selected layer, or use the **Name** box in its properties. Clicking the name on a timeline track works too.

## Dock sizes, pins and maximize

- Every dock remembers whether it is open, closed or hidden, its height and width, its pin and whether it is maximized — in `docker_status.json` beside the app, the same layout in every project, loaded before anything else appears.
- (the first button in each dock's header) pins the dock's height as it is now: it can be dragged smaller but not taller. Click again to unpin. On the side docks the pin keeps the width.
- Opening a dock puts the other pinned docks back at their pinned height; the room comes from the unpinned docks.
- **Maximize** gives a dock all the room the other open docks leave — they stay open at their own height (or their pin). Every splitter still works. **Esc** or restores.

## Docker configs: a saved layout for each set of dockers (2.392.0)

⊞ (Docker configs) is the icon button at the right end of the menu bar. It keeps your docker layout tidy, so the dockers you open together never end up squashed or cut off.

1. Open the dockers you work with together, for example Music, Prompt chat and Prompt. Size them the way you like.
2. Click ⊞ **Docker layout ▸ Save layout**. The size of every docker is saved in **docker.cfg**, a file in the install folder - and (2.432.0) **which dockers are on screen** (open, collapsed to their header or hidden), which **side docks** are shown (left dock, References, Assets, queue, gallery), and the **places and sizes of the floating panels** (Basic Settings, LLM tokens, the ⊖ negative prompt, the camera, the floating prompt) and of Karaoke / Tools beside the timeline canvas (docked left / right or floating, shown or not, the columns' widths).
3. From then on, whenever exactly those dockers are open together, they take those sizes again.

Opening a fourth docker looks for a layout saved for those four. If there isn't one, the dockers stay as they are, so you can size them and save again. Closing the fourth docker brings back the layout for the three.

**Different screens.** Each set can keep a layout per window size (up to six). On a screen you haven't saved for, the nearest saved layout is used and fitted to the window, so every docker stays in view.

The panel lists every saved layout:

- **Load** opens that set of dockers with its sizes; the dockers that were on screen collapsed come back collapsed, the side docks and the floating panels go back to how they were saved.
- × forgets a saved layout.
- **Load saved layouts automatically** turns the automatic loading off or on.

The button is highlighted while a layout is saved for the dockers that are open now.

## ▾ Which picture the prompt docker works from: references or layers, and Compose (2.543.0)

The prompt docker's dropdown ( Image mode) now picks the picture by where you are working. The AI panel in the image editor no longer has its own Generate / Refine / Edit / Background / Compose tabs; the dropdown chooses. A chip beside it says what the button will use.

**With the image editor minimized or closed**, the dropdown has Generate, Edit, Refine, Replace background and Compose, and they work from the **References docker's pictures** (up to 3). Fill and Remove leave the list, because they need a selection in the editor. Your choice comes back when the editor opens again.

- ✏ **Edit**: with one reference, the edit model changes it. With two or three, they are composed together.
- **Replace background**: the edit model is told to replace the background and keep the subject as it is.
- **Refine**: redraws reference picture 1 at the slider's strength.
- **Compose**: one picture made from the references ("put the dog from picture 2 on the sofa in picture 1").
- The results land in the gallery like any picture.

**With the image editor open**, Fill and Remove are back, and the picture comes from the **selected layer**:

- ✏ **Edit**, **Refine** and **Replace background** work from the selected layer, even if other layers cover it. An empty layer uses the picture as you see it. Each result comes in as a new layer.
- **Several layers picked** (Ctrl-click in the Layers panel) are all used: Edit and Replace background compose them, and **Compose** makes one picture from them.
- With a **selection**, Refine and Replace background work on the selection as before, and Fill and Remove need one.

## A Blender layer: the timeline's scene tools in the image editor (2.542.0)

on the image editor's menu bar (beside ), or **Layer ▸ New Blender Layer (Scene Tools)…**, puts the timeline's Blender scene tools over the canvas. They are the same tools, the same scene and the same edits as in the timeline:

- **Open a .blend**, or carry on with the scene that is already open. **Build a scene with AI** works here too.
- **Scene camera** looks through the .blend's camera. **Free view**: drag to orbit, right-drag to pan, use the wheel to zoom, and press F to frame everything. **/** or **Alt+drag** (forward = in, back = out) zoom, and **Zoom to object** (Z) goes to the picked object (2.546.0).

- In the image editor there is no player bar and no Auto-key: the scene is one still picture there. They are still in the timeline (2.546.0).
- **Click an object** to pick it, then ✥ (G, R, S) to move, rotate or scale it. You can also key it, hide it, duplicate it, delete it, or add a model with Model.
- 2.550.0: **a rigged figure** (a Daz character, anything with an armature) is picked by its **rig** - a click on its body (or its mesh in the object list) picks the armature, because a skinned body is drawn by its bones: moving the mesh alone only moved the widget. A figure the click ray missed (its bounds were the rest pose) is found by its posed box.
- **Save** writes the edits into the .blend, the same way as in the timeline.

Their settings are in the **Blender** tab. The scene becomes a **Blender layer** that holds the view as you see it. ✕ (or again, or Esc) closes the tools, and the layer keeps the view. It is an ordinary layer: hide it, move it or delete it. Pick it and press **Scene tools** to open the tools again.

**Making a picture from the scene.** Pick the Blender layer and choose ✏ **Edit** (or Refine) in the prompt docker's dropdown. The button reads "✏ Edit · Blender". Type what the picture should be and press it. The scene goes to the edit model, and **each result comes in as a new layer** above the Blender layer. Nothing is left over the canvas, and the Blender layer stays picked. The Blender tab's **Edit from** sets which picture of the scene is used:

- **The view as shown** (instant): the live view while the tools are open, else the layer's last view.
- **Blender render - Solid** or **EEVEE**: Blender renders that view at the picture's full size first.

The 3D layers from Layer ▸ New 3D Layer work the same way now: an Edit from the scene is a new layer.

**The References docker's pictures with the scene** (2.546.0). Name a reference picture in the prompt and it goes to the edit model together with the scene - for example "*photo real blonde woman on a beach with the face of the woman in picture 1*". Picture 1 is the first picture in the References docker, picture 2 the second, and so on ("image 2", "pic 2", "ref 2" work too). At most two go along with the scene, because the edit models take three pictures.

- The scene is always the model's first picture, so bitGen renumbers your references for the model, and it uses the model's own word: FLUX.2 / FLUX 3 Klein are told "image 2", Qwen Image 2.1 "<image2>", Qwen Image Edit 2511 "Picture 2". You write "picture 1" either way.
- The Blender tab's **References** setting: **When the prompt names them** (the default), **Always** (the ones named, else the first ones), or **Never**. It works for Blender layers and for 3D layers.
- A prompt that names no picture sends the scene alone, as before.

## ▾ Generate, Edit, Refine, Fill, Replace background, Remove, and Blender mode (2.541.0)

In Image mode, the prompt docker's menu bar has a dropdown that says what its button does. It works like the Krita AI plugin, on the picture open in the image editor:

- **Generate**: a new picture from the prompt, as before. With the editor open it lands on the canvas as a layer.
- ✏ **Edit**: the edit model follows the instruction ("make her jacket red") on the selection, else the whole picture.
- **Refine**: redraws the selection, else the whole picture. A slider appears on the menu bar for how much it changes (5 – 95 %). It is the same setting as the AI panel's strength.
- **Fill**: fills the selection from the prompt. Select the area first.
- **Replace background**: keeps what is selected and makes everything else new.
- **Remove**: takes out what is selected and continues the surroundings. The prompt is optional.

The button's words follow the choice (" Refine 40%"), and the AI panel's tabs follow it too. If the editor is closed, the button opens it. The results come into the AI panel: click one to compare, and its ✔ keeps it as a new layer.

**Blender mode.** Pick a 3D layer (Layer ▸ New 3D Layer, a Daz or Blender scene), and a Blender chip shows beside the dropdown. Edit and Refine then work from the scene: Blender renders it at the picture's full size with the layer's engine, and that picture goes to the edit model with the prompt. The 3D layer itself is left as it is.

**The model.** The 3D tab has a **Model** section under the camera:

- **Object**: pick one of the scene's objects (cameras are not listed).
- **Move m**, **Turn °** and **Scale %** move it on top of where the file has it. **hidden** leaves it out.
- **Drag the object**: click an object on the canvas to pick it, then drag it along the ground as the camera sees it. Shift + drag moves it up or down, and Ctrl + drag turns it.
- **Reset object** and **Reset all** put things back. Each change is one undo step.

The original .blend file is never changed.

## Update bitGen Studio from GitHub (2.540.5)

**Settings ▸ General ▸ Updates** shows your version, how bitGen Studio was installed (a git clone, or the full zip) and the GitHub repository it updates from.

- **Check for updates** asks GitHub for the newest version and lists the new changes.
- **Update now** puts the newest version in place. It asks first, and the log appears in the section.
  - **A git clone** moves to GitHub's version. If you changed any of the app's own files, they are copied to `backups\update-<time>\` first.
  - **An install from the zip** downloads GitHub's copy and writes the files that changed.
  - **Either way**, your projects, settings, styles, models, ComfyUI and saved quick prompts are not touched. When the Node or Python package lists change, they are installed too.
  - A folder with commits of its own (a developer's copy) is not updated. Use git there instead.
- **Restart now** finishes the update in the desktop app. In a browser, close the window running `start.bat` and start it again.
- **A note on start:** a little after start, bitGen Studio checks quietly. If GitHub has a newer version, it says so once.

## Settings ▸ Add-ons: optional engines installed in the app (2.540.4)

**Settings ▸ Add-ons** lists the engines that are not part of the main install. For each one it shows what it is for, what it needs, how big it is and whether it is installed. **Install**, **Reinstall** and **Remove** work there, and the install log appears in the tab. One install runs at a time.

- **YuE2 music**: the "YuE2" style in the Music docker (songs from lyrics plus a style caption).
  - Install makes its own Python environment in the app's `yue2` folder.
  - It then installs PyTorch 2.10 with CUDA for your card and the pinned YuE2 pipeline (yue2-infer 0.1.6), about 5 GB.
  - The model, m-a-p/YuE2-3B, downloads on the first song.
  - It needs an NVIDIA GPU with BF16, about 24 GB of VRAM, and the app's Python 3.10 - 3.13.
  - On Windows, PyTorch comes without FlashAttention. bitGen Studio gives YuE2 another attention kernel (cuDNN, then PyTorch's own, then the slower no-graph mode), says which one in the log, and remembers the one that worked (2.540.7).
  - Remove deletes the `yue2` folder.
- **AI fill models (the Krita AI way)** (2.557.0): what the image editor's Generate / Fill / Remove in a selection uses per model family (see the 2.555.0 fill). Tick what you need - each with its size, ✓ downloaded when it is there:

  - – Fooocus inpaint (SDXL / Pony), MAT (Remove) and the NoobAI inpainting ControlNet (Illustrious / NoobAI) are ticked; the FLUX.1 and SD 1.5 inpainting ControlNets and the FLUX.2 Klein 4B outpaint LoRA are there to tick.
  - – **Download ticked** installs the node pack comfyui-inpaint-nodes into your ComfyUI (and comfyui_controlnet_aux when a ControlNet is ticked), then downloads the files into ComfyUI's models/inpaint, models/controlnet and models/loras (resumable; your Hugging Face token from Settings is used). Restart ComfyUI once after the first install.
  - – **Remove models** deletes the downloaded files (the node pack stays).
  - – It needs ComfyUI's folder set in Settings ▸ ComfyUI.
- **Viggle (native)**: starts its own installer. Its progress shows in the Queue.

## Blender and Unreal renders made real with the reference docker's pictures (2.540.0)

Each object in a Blender or Unreal scene can be matched to a picture in the References docker. The grey block called "Car" then becomes the red sports car in your reference, and 3DREAL animates it.

- **How objects find their picture**
  - – **By name**: an object called Car, SM_Car_01 or Vehicle.002 finds a picture whose description or name says car / sedan / truck…, and Sofa finds "a green velvet chesterfield". Walls and floors find wall and floor pictures.
  - – **By hand**: every object has a dropdown, where *auto* uses the name match, *none* leaves it as it is, or you pick a picture.
- **Timeline ▸ Blender scene ▸ Render to real ▸ References**
  - – Tick **Use them** and pick the edit model (the one that takes the most pictures comes first).
  - – renders the segment as before, plus its first frame. That frame goes to the edit model as Picture 1, with the references after it ("the grey shape on the left (the object "Car") becomes a red sports car in Picture 2").
  - – LTX 2.3 **3DREAL** then animates the render, starting from that real first frame.
- **Image editor**
  - – On a **Blender 3D layer**, the References section lists the layer's meshes. Generate then makes the layer's picture real with the matched references as a new layer.
  - – On an **Unreal layer**, the Unreal tab has **Find the objects** (Unreal lists the mesh actors this camera sees) and **Make it real**.
- **Timeline ▸ UNREAL ▸ Render to Real** works the same way for an Unreal clip: Find the objects, then OK. The first frame is made real, and 3DREAL follows the clip.
- Unreal needs **bitGen Bridge 1.3.0** ( Load UE project updates it).

## Reference descriptions, the house types, references in the house builder and the image editor (2.539.0)

> **2.630.0: the House builder is gone.** Its furniture, materials, cameras (shots, depth / normal maps, 360° locations), > Furnish and people are in the Sketcher; File ▸ A house from the House builder… brings a saved house in.

- **A description for every reference** - a short box under each picture in the References docker's Image tab, each video and each sound ("a green velvet chesterfield", "a slow waltz", "her voice, calm and low"). It is saved with the project and with a reference group, it goes into the mapping lines ("<subject 2> furniture is in <Picture 2> (a green velvet chesterfield)"), and the prompt chat and Enhance use it (it beats the vision model's guess).
- **New picture types**: wall, floor, furniture and light in the Type dropdown.
- **House builder** - drag a picture from the References docker onto the plan:

  – on a **wall** or a **room** it becomes that wall's / that floor's picture: the 3D view, the shots and the 360° panoramas show it. **Tile (m)** in the panel says how many metres one copy covers.

  – on a **piece of furniture** or a ◯ **light** it is what the piece really looks like: the 3D view keeps the simple shape, and **Make it real** sends the picture along with "make the sofa look exactly like the one in picture N".

  – Or select the wall / room / piece and use **From References…** (wall / floor / furniture / light pictures first) or **From disk…** in its panel; × takes it off. The pictures are kept with the house.

- **Image editor**

  – drop a reference picture on an open picture: it comes in as a **new layer**, named by its description.

  – AI → **Edit** has a **reference** dropdown: the edit model gets that picture as Picture 2 ("put the lamp from Picture 2 on the table").

## Civitai downloads into each type's folder, the folders, Sync (2.538.0)

- **on a Civitai card** downloads the newest version's main file. The first time for a *type* (for example SDXL LoRAs, Pony models, Wan LoRAs) the **Select Folder** dialog asks where that type goes; after that every model of the type goes straight there - no dialog. **Shift+click** opens the dialog again to change the folder. The buttons in a model's versions list work the same way.
- **The types**: the main category (image, image-edit, video, music), the model type (sd1, sdxl, pony, illustrious, noobai, flux, flux2, flux2klein, flux3klein, krea, qwen, z-image, chroma, hidream, sd3, anima, wan, ltx, h3, hunyuan, music …) and the kind (models, LoRAs, VAEs …). They are kept in **model_folders.json** in the app's folder, so every project uses them.
- in the Models docker lists every type's folder: *Change…*, × forget (the next asks again), or pick a folder for any type before you download.
- A folder outside ComfyUI's model folders still downloads, but ComfyUI only lists it once it is in extra_model_paths.yaml - the downloads list says so.
- **Sync** fetches Civitai's details, thumbnails and example pictures for **every** model and LoRA on this computer (all tabs) that has none yet or is out of date. A model Civitai already named (a .civitai.info, .metadata.json or our card) is asked for exactly by its version id, then by SHA-256, then by the file name. Shift+click syncs all of them again.

## ◯ Lights in the house builder (2.538.0)

> **2.630.0: the House builder is gone.** Its furniture, materials, cameras (shots, depth / normal maps, 360° locations), > Furnish and people are in the Sketcher; File ▸ A house from the House builder… brings a saved house in.

- ◯ **Light** on the toolbar: press where the light hangs and drag out how far it reaches - the plan shows its circle.
- ⬚ **Select** moves it; the dot on its circle sizes the reach; Delete removes it. The panel: name, height over the floor, reach, brightness, colour, Copy.
- Placed lights are always lit in the 3D view, the shots and the panoramas (the lamps tick is for the furniture's lamps).

## Maximize beside the side dockers (2.538.0)

Maximizing a floating docker now fills the room between the side dockers that are open - the left docker, References, Assets, the Queue and the Gallery stay visible. Close one and the next maximize uses its room too.

## Models: pages, folder tabs, card size, the model info page and Civitai info for every model (2.537.0)

The Model manager is built for hundreds of models now:

- **Pages** - a page holds as many cards as fit the docker (*auto*; resize the docker and it refits), or 24 / 48 / 96 / 200 a page; ‹ 1 2 … › under the cards.
- **Folder tabs** - under Models / LoRAs: one tab per folder you keep your models in (checkpoints/SDXL -> **SDXL**, loras/Pony -> **Pony**), so the types are apart. **This project** lists the models + LoRAs this project's renders used.
- ⇲ **Edit** - drag a card's corner (or the slider) to size the cards; the columns refill the docker. It is remembered.
- **A click on a card** selects it (the model to use, or a LoRA to add). **Hover** shows its description card - move onto it and **click it** for the **info page**: the picture, every detail, trigger words, the description and the **example pictures with their prompts** (*Use this prompt*), ✓ Use this model, ✎ Edit card, Civitai ↗. ‹ Back or Esc.
- **Civitai info** - details, a thumbnail and example pictures for every card on the tab that has none yet, found by the file's name (Shift+click: fetch them all again; By SHA-256 on the info page is exact). They are kept in the app's **model_info** folder, so every project sees them, and nothing is written into your model folders. It runs in the background, one model at a time (a few seconds each); ■ Stop ends it.

## Veda sparse attention - a faster MiniMax H3 (2.536.0)

**Veda** (veda-sparse/Veda-on-ComfyUI) is a learned sparse attention for MiniMax H3: a small predictor decides which ~10 % of the attention matters and a Triton kernel skips the rest - about **2-3x faster end to end** at its trained sizes (1344x768, 768x1344, 768x768, 1024x768; 5 / 10 / 14 s), faster than Sage. It is a preview: faces can come out a touch softer, and other sizes use the nearest trained size's plan - compare a hero shot with Veda off.

1. Settings -> ComfyUI -> **Video accelerators -> ⬇ Install Veda** (it clones the pack and pip-installs its requirements; triton-windows on Windows). It needs **ComfyUI 0.38 or newer**.
2. Settings -> Models -> **Model catalog -> Veda predictor (MiniMax H3)** (275 MB, into ComfyUI/models/veda). Restart ComfyUI.
3. Settings -> Video styles -> a MiniMax H3 style -> **Veda sparse attention**: **On** (fastest, the authors' 90 %), or **Quality** (denser - 75 % / 50 % and full attention on the first step). The predictor field can stay blank: the app picks the one ComfyUI lists (an R2VA one for reference renders when you have it).

Veda replaces attention, so the style's Sage setting is skipped while Veda is on; it is skipped itself when Long video is on. If Veda fails in a render the app drops it and renders again without it (the log says so).

## FLUX 3 Klein needs ComfyUI 0.41 or newer (2.535.0)

FLUX 3 Klein's text encoder loads with a CLIPLoader *type* (`flux3`) that only ComfyUI **0.41.0 or newer** has (0.41.1 or newer is best). On an older ComfyUI the job now says so - '*flux3*' *is a CHOICE of CLIPLoader.type, not a file: this ComfyUI does not offer it*, which version you have and how to update (the portable build: `update\update_comfyui.bat`; a git install: `git pull` + `pip install -r requirements.txt`; or ComfyUI-Manager -> Update ComfyUI) - then restart ComfyUI. The Style doctor says the same. The model catalog now downloads FLUX 3 Klein under its real file names (`flux3-image-klein-int8-convrot`, `flux3-image-klein-base-int8-convrot`).

## Test mode, and new renders joining the open preview (2.534.0)

**Test mode** (Settings -> General, under Testing - or the box at the top of the Testing docker). While it is on:

- a small **Try next** box (bottom right) suggests the next test *where you are* - in the image editor it starts with Gaussian Blur, then the brush, the eraser, selections, layers …; in the House builder the house tests; in Settings the Settings ones. ✓ **Tried it** asks whether it worked, **– Skip** marks it not tested, **Later** shows the next one, × stops the reminders in that area for this session;
- when the app sees a test work by itself (you applied the blur, a job of that style finished, you picked a workspace …) a **Did it work?** box asks you: ✓ **It worked** / ✗ **It didn't** / Later, with *what happened* and **Suggestions to change this feature**. Your answer and suggestion go in the test list and at the top of the log you save ( Save log) under SUGGESTIONS;
- the docker's ↺ on a row tests it again.

While it is **off** nothing is ticked, nothing is kept and nothing pops up; your own ticks stay.

**The preview follows new renders.** If the picture preview is open when a render finishes, the new picture joins its strip at once (the one you are looking at stays) and a **1 new** button in its top bar takes you to it.

## Dropdown lists inside a dialog open in front of it (2.533.0)

A long dropdown opens its own list with a search box (Settings -> General -> Dropdown lists). Inside a dialog - the *Select a LoRA* / *Select a ComfyUI model* browser, Settings, any other - that list now opens in front of the dialog and takes the mouse and the keyboard; before, it opened behind it. An open list also no longer closes by itself while a video preview plays or the log scrolls.

## Tests tick themselves, docker title bars, selecting and walking a camera in the House builder (2.532.0)

> **2.630.0:** the House builder parts of this section are gone with it (see the Sketcher).

**The test list ticks itself.** When the app sees something on the list work - a job of that style finishing, a workspace picked, the palette used, a room furnished, a docker minimized - its line is ticked and the tick is **kept** (it shows *auto* ✓), so it is still there after a restart. Your own ✓ / ✗ / – always win; a note on an auto tick keeps it.

**_ × on every floating docker. _** shrinks it to its title bar (▭ or a double-click on the title opens it again), fills the window between the menu bar and the statusbar ( puts it back where it was, docked or floating), × closes it.

⬚ **Select in the House builder.** Click a piece: drag it; its corner squares size it (Shift keeps its shape); its ↻ handle turns it in 15° steps (Shift = free). Drag on an empty spot for a box that selects everything inside; Shift+click adds or takes one off. Several selected: drag one to move them all, R / Shift+R turns them about their middle, the arrow keys nudge them, Delete removes them (Ctrl+Z brings anything back).

**Walk a camera.** Drag a camera through the plan - the 3D view looks through it as it moves. With it selected (or while the 3D view looks through it): ← → turn it, ↑ ↓ tilt it, hold **Shift** to rise (at most 3 m over the roof), hold **Alt** to sink (down to the ground floor). Its floor follows its height.

## A missing model file says where to get it (2.531.0)

Before a job is sent, every file a style loads - the model, the text encoders, the VAE, LoRAs, ControlNets - is looked up in ComfyUI's own lists. One sitting in another subfolder (for example `Anima\qwen_3_06b_base.safetensors`) is used under the name ComfyUI gives it. One that is in no list at all makes ComfyUI refuse the job; the message now also says when the app's **model catalog** has it: *Settings -> Models -> Model catalog -> "Anima text encoder (Qwen3 0.6B base)" (1.2 GB) downloads it to ComfyUI/models/text_encoders* - then restart ComfyUI. The Style doctor says the same.

## Find anything - the Ctrl+K command palette and Help (2.530.0)

Press **Ctrl+K** (or in the menu bar) and type what you are looking for - words in any order:

- every **docker** (a hidden one comes back on screen) and every **floating window** ( House, LoRA, Style doctor …);
- every **button** of the menu bar and the statusbar, even those the current workspace hides;
- every **Settings field** - the dialog opens on its tab with the field lit;
- the **workspaces**, the **Generate modes** and your **picture / video styles**;
- every **section of this guide** - it opens in the **Help** window, where any other section can be picked;
- every **shortcut key** - its group's key table opens in Help.

↑ ↓ pick, **Enter** runs it, **Esc** closes. What you run often comes first next time. Over the timeline's layers Ctrl+K still splits a clip, and in the image editor it is the editor's own palette.

## House builder extras - roof, trace a plan, furnish, .glb, shot list (2.529.0)

> **2.630.0: the House builder is gone.** Its furniture, materials, cameras (shots, depth / normal maps, 360° locations), > Furnish and people are in the Sketcher; File ▸ A house from the House builder… brings a saved house in.

With nothing picked, the House panel has two new parts:

- ⌂ **Roof** - none, flat, gable or hip over the top floor, with its pitch, overhang, material and colour. The shots, 360°s and exports always have it; the **roof** box at the top shows it in the orbit view (untick it to see in).
- **Plan picture to trace** - load a drawn or photographed floor plan; it sits under your walls. **Set the scale**: click two points you know the distance between and type it (metres). **Move it** drags it into place, takes it away.

Pick a room for **Furnish this room**. Type what should go in (or leave it blank). When an LLM is running it picks the pieces from the furniture library; without one, the room gets the usual set for its kind (bedroom, kitchen, bathroom, living, dining, office, laundry, garage) plus any piece you name ("a piano", "plants"). The pieces go against the walls, clear of the doors, never on top of each other. Ctrl+Z takes them out again.

In **As a location**:

- **.glb** - the house as one binary glTF file with its materials, for Blender, Unreal, Godot and most 3D viewers.
- **Every camera** - a shot and depth map per camera in the Image assets, and (ticked) a StoryBoard scene per camera with the shot as its first frame and the room as its prompt. **the list** downloads the shot list as .md.

## Characters in House shots (2.528.0)

> **2.630.0: the House builder is gone.** Its furniture, materials, cameras (shots, depth / normal maps, 360° locations), > Furnish and people are in the Sketcher; File ▸ A house from the House builder… brings a saved house in.

The House builder has a **Person** tool. Press where the person stands and drag the way they face. In the properties pick:

- **Character** - one of the project's characters (the StoryBoard's cast), or none for "a person";
- **Pose** - standing, sitting, walking or waving; their **height** and which way they face;
- **LoRA** - optional, a character LoRA with its weight.

A grey mannequin stands in for them in the 3D view, the shots, the depth and normal maps (for ControlNet) and the 360° Location.

**Make it real** then puts the real person in: the shot goes first, each character the camera sees goes with it as the next picture (picture 2, 3 …), and the prompt says which mannequin is who - for example "the mannequin in the middle in the foreground is the person in picture 2 (Mira, 29, red

coat), sitting". A person behind a wall is left out; a door or an opening lets the camera see through. Their LoRAs ride along like Basic Settings' temporary LoRAs - a LoRA must be made for the style's model family.

Use a style that takes several pictures for people: **FLUX.2 Klein edit** takes 3 (the shot + 2 characters), **Qwen Image 2.1 edit** takes 8. With a style that takes fewer, the extra characters' pictures are left out and the message says so.

## The Style doctor - which styles work, and why the others don't (2.527.0)

in the menu bar opens the Style doctor. It lists every image style. ▶ **Check** makes a small test picture with each ticked style, one at a time, through the same path as Generate:

- **Quick check** - 512 × 512, 4 steps. Does the style load and run? A few seconds each.
- **Real render** - the style's own steps and size, slower.

Each row ends ✓ **works** (with its time and the test picture) or ✗ **failed** with the line from the log that matters and what to do, for example:

- a model ComfyUI does not list -> which models folder to put it in;
- a missing node pack -> its name, and Install Missing Custom Nodes;
- ComfyUI not running, out of video memory, a half-downloaded file, a text encoder that does not fit the model.

A style with a missing field fails at once, without rendering. An edit style (one that takes a picture) is given a small test picture. ■ **Stop** cancels the render running now. ↻ checks one style again. The test pictures do not stay in the gallery or the Image assets unless you tick **Keep the test pictures**. The last run is kept; **Report** downloads it as a .md file, clears it.

## Workspaces - Basic, Image editing, Video editing, Music video, Expert (2.526.0)

The **Workspace** dropdown in the menu bar sets the app up for one kind of work. Each workspace shows the dockers that work needs and hides the statusbar and menu-bar buttons it doesn't. Nothing is disabled - Expert shows everything.

| Workspace | Shows | Generate is set to |
|---|---|---|
| ◯ Basic | Preview, Prompt, References, the queue and the gallery - the advanced buttons are hidden | (unchanged) |
| Image editing | The image editor (maximized), Prompt, References, Assets | Image |
| Video editing | Preview, Timeline, StoryBoard, SFX, Prompt | Video |
| Music video | Preview, Timeline, StoryBoard, Music, Stems, Prompt | (unchanged) |
| ◆ Expert | Every docker and every button | (unchanged) |

**Your changes are kept per workspace.** Hide a docker, resize one, open House or Basic Settings - when you go to another workspace and come back, it is as you left it. The first time you leave Expert, the layout you had becomes Expert's, so nothing you set up before is lost. ↺ next to the dropdown puts the current workspace back to its default. The app starts in the workspace you were last in.

## A model in another ComfyUI folder is still found (2.525.0)

ComfyUI's loaders each list their own folders: **Load Diffusion Model** (UNETLoader) lists `models/diffusion_models` and `models/unet`; **Load Checkpoint** lists `models/checkpoints`. A model downloaded as a Civitai "Checkpoint" often lands in `checkpoints`, where a diffusion-model style (Krea 2, Anima, Qwen Image…) could not see it.

Before a job is sent, the app now asks ComfyUI which list really holds the style's model:

- the same file in another subfolder -> the name ComfyUI lists;
- a `.safetensors` only Load Checkpoint lists -> that node becomes **Load Checkpoint** (it loads a model-only file too); the workflow keeps its own text encoder and VAE loaders.

The job log says so: `node 70.unet_name: Krea2/… -> as ComfyUI lists it: … loaded by Load Checkpoint`. If the file is in no list at all, the error says so and tells you where to put it (`ComfyUI/models/diffusion_models`, a subfolder is fine, or a folder added to extra_model_paths.yaml - then restart ComfyUI).

## The House builder - a floor plan you can use as a Location (2.524.0)

> **2.630.0: the House builder is gone.** Its furniture, materials, cameras (shots, depth / normal maps, 360° locations), > Furnish and people are in the Sketcher; File ▸ A house from the House builder… brings a saved house in.

**House** on the statusbar opens a floating docker with a floor plan on the left, a 3D view in the middle and the properties on the right. Everything is in **metres** on a 5 cm grid. Houses are saved in the project.

**Drawing**

- ▭ **Room** - drag a rectangle; its walls come with it (two rooms side by side share one wall). **Polygon room** - click the corners, then click the first corner again (or Enter).
- ╱ **Wall** - click, click, click…; Enter, double-click or Esc ends it. Walls snap straight; hold Shift for any angle.
- **Door, Window, ⇋ Glass sliding door, ▢ Opening, Garage door** - click on a wall.
- **Furniture** - pick a piece from the library (living, dining, kitchen, bedroom, bathroom, office, lights, outside), click to place it; **R** turns it. Its colour and size are in the properties.
- ⇗ **Stairs** - add a floor above first ( next to the floor tabs); the stairs cut their hole in the floor above.
- **Camera** - press where it stands and drag where it looks. Its eye height, tilt and lens are in the properties.
- ⬚ **Select** - drag to move (drag a wall's end to move the corner), **R** turns, arrows nudge 5 cm, **Delete** removes, **Ctrl+Z / Ctrl+Y** undo / redo, **Ctrl+S** saves.

**Materials and light** - pick a room to set its floor (oak, walnut, tiles, marble, carpet, concrete…) and its walls; pick a wall for brick, stone, wood, paint… ☀ **Time** moves the sun (it stands in the north at noon - the southern hemisphere), **North** turns the house, **Lamps** switches the ceiling and floor lamps on (always on at night).

**3D** - orbit with the mouse, or pick a camera in the view menu () to see what it sees; drag in that view to aim it.

**Using it as a location** (pick the camera in As a location):

- **360° location** - renders a 4096 × 2048 panorama from the camera and makes it a **Location** (the Locations docker, its @tag in the prompt, its view starting where the camera looks).
- **Shot + maps** - the camera's picture plus its **depth map** (white = near) and **normal map** go into the Image assets, for the reference docker and ControlNet.

- **Make it real** - sends the shot to an image style that takes a picture (Qwen Image Edit, FLUX.1 Kontext, FLUX.2 Klein…) with a prompt written from the room ("a living room (27 m², 6.0 × 4.5 m, 2.7 m ceiling), tan oak floor, …"). Edit the prompt first if you like.
- **.obj for Blender / Unreal** - house.obj + house.mtl in a zip (metres, Y up; in Unreal import at scale 100).

## A style's model can be a .gguf or a .safetensors (2.523.0)

A picture style's **Model** can be either kind of file. The app picks the matching ComfyUI loader for it:

- a `.safetensors` model uses Load Diffusion Model (UNETLoader);
- a `.gguf` model uses the GGUF loader (the ComfyUI-GGUF pack).

So "Krea 2 Raw GGUF" can render a `.safetensors` fine-tune, and "Krea 2 Raw", "Krea 2 Turbo" and "Anima" can render a `.gguf`. The job's log says when it switched, for example `model: node 70 UnetLoaderGGUF -> UNETLoader`.

Both loaders read the same folders: ComfyUI's `models/diffusion_models` and `models/unet`, and any subfolder in them. A separate `unet` folder is not needed.

## Reporting a bug (2.522.0)

Press **Ctrl+Alt+Shift+B** anywhere in the app (it works while typing too). The app takes a screenshot of its window first, as it was, then opens the **Bug report** docker. Press it again to hide the docker. You can also open it from Settings ▸ General ▸ **Report a bug…**.

1. Fill in:
   - **Title**: in a few words, what broke.
   - **Severity**: crash / freeze, something does not work, ⚠ wrong result, looks wrong, or idea.
   - **Where**: the docker you used last is picked; change it if needed.
   - **What happened** and **what you expected**.
2. **Steps to reproduce**: **Use the recorded steps** puts your last clicks, choices and shortcut keys in, with the docker each was in. Edit them as you like.
3. **The screenshot**:
   - ✏ **Pen** and ▭ **Box** mark the problem in red; ↶ **Undo** takes the last mark off.
   - **Again** takes a new screenshot (the docker hides for it).
   - **A picture…** uses one of your own.
   - In a web browser, asks which window to capture.
4. **Attached** (tick or untick each):
   - the screenshot;
   - the **logs**: the app console, ComfyUI, the vision model, and the last jobs with failed ones first;
   - the **system + settings**: version, OS, graphics card, RAM, ComfyUI version;
   - the **recorded steps**.
5. **What is included** shows all of it before you save.
6. **Save report** writes the report into the app folder's `bug-reports` folder and downloads **bitgen-bug-<date>-<title>.zip**. That one file is what you send. It holds:
   - `report.md`, to read;
   - `report.json`, everything;
   - `screenshot.png`;
   - the `logs`.

**Earlier reports** lists what you saved: downloads one again, deletes it. A report you have started but not saved is kept in this browser until you save it.

**Privacy**:

- The recorder keeps only what was pressed and where. A text box only says "edited", never what was typed.
- Every setting that looks like a key, token or password is hidden as •••, and so are token-shaped text in the logs (`hf_…`, `ghp_…`, `sk-…`, `token=…`).
- The recorder also keeps page errors and requests that failed (the address and status, never what was sent).

## Fine-tunes in the trainer: checkpoints, the assistant (LLM) and the vision model (2.521.0)

The statusbar's **LoRA** button opens the **LoRA & fine-tune trainer**. Every job now has a **Type**, the first row of the Job tab:

| Type | What it trains | Engine | The result |
|---|---|---|---|
| LoRA | a small add-on for a picture / video model | ai-toolkit | ComfyUI's `loras/trained` |
| Checkpoint fine-tune | every weight of a picture model - a new model | ai-toolkit | ComfyUI's `diffusion_models/trained` |
| LLM fine-tune | the app's assistant, on your own chats | Unsloth | a `.gguf` in the LLM folder |
| Vision fine-tune | the app's vision model (captions, picture questions) | Unsloth | a `.gguf` + its `mmproj` in the vision folder |

The base-model list marks the recommended ones with ★ and says how much graphics memory each needs compared with your card. A model your card is too small for can still be trained on a bigger machine: **Export job**, or Settings ▸ Remote GPU ▸ RunPod.

### The recommended base models

**The assistant (LLM)**:

- ★ **Qwen3.5 4B**: the best start (a 12 GB card, ~10 GB for a 16-bit LoRA).
- ★ **Qwen3.5 9B**: the strongest that fits a 24 GB card.
- **Gemma 4 E4B / E2B**: Google, good writing; E2B fits an 8-10 GB card.
- **Gemma 4 31B**: as a 4-bit QLoRA on a 24 GB card.
- **Qwen3.5 0.8B / 2B**: small and quick; the 0.8B can take a full fine-tune.
- **Qwen3.8 27B**: the newest, for a 64-80 GB pod.

All are Apache 2.0. Qwen3.5 trains in 16-bit: Unsloth advises against 4-bit for it.

**The vision model**: ★ **Qwen3.5 4B vision** (12-16 GB) or ★ **Qwen3.5 9B vision** (24 GB); Gemma 4 E4B / E2B.

**Pictures**:

- **A LoRA** stays the best way to teach a person, a style or an object, on any card. New: **FLUX.2 klein base 4B** (Apache 2.0). It fits a 24 GB card, learns fast, and its LoRA works with the fast distilled klein 4B.
- **A checkpoint fine-tune** (every weight) needs a big card:
  - Lumina-Image 2.0: 24 GB, one of ai-toolkit's own examples.
  - Flex.1-alpha: 48 GB, or less with **parameter swapping**.
  - FLUX.2 klein 4B and SDXL: experimental.
- **Bake** gives you a new checkpoint on any card: train a LoRA, then bake it into its base model.

### LLM fine-tune (the assistant)

1. ⚙ **Install Unsloth** (once). A queue job makes Unsloth's own Python with PyTorch for your card, plus llama.cpp's GGUF converter (about 8 GB).
2. **Job tab**:
   – **Base model** and **Method**: LoRA (16-bit, merged into the model), QLoRA (4-bit, less memory) or Full fine-tune (every weight, about 4× the memory).
   – **LoRA rank / alpha**, **epochs** or **max steps**, **learning rate**, **batch**, **gradient accumulation**, **max length** (tokens) and **warm-up**.
   – **System prompt** (who the assistant is) and **Model file size** (Q4_K_M is the usual).
   – **Config** shows Unsloth's run as JSON; edit it and press ✎ **Use mine**.
3. **Dataset tab**: each example is a short conversation.
   – **Example**: type what someone asks and the answer you want. **a follow-up turn** adds more turns.
   – **Import…** reads:
   – JSONL / JSON: `{"messages": [...]}`, ShareGPT `conversations`, `instruction` / `input` / `output`, `prompt` / `completion`, `question` / `answer`;
   – a CSV with a header row.
   – **chat.jsonl** saves them all.
   – About 100 good examples teach a style or a task; a few thousand teach knowledge.
4. **Run & samples**: ▶ **Start the fine-tune**. The queue shows the steps and the loss. The finished model is merged, converted to `.gguf` and put in the LLM folder (`<name>-Q4_K_M.gguf`); Settings ▸ LLM picks it.

### Vision fine-tune (the captioner)

Add pictures in the Dataset tab and write, under each one, **the answer** the vision model should give. Write the question in the Job tab's **Instruction**, for example "Caption this for a storyboard."

**Answer the empty ones** lets the vision model you have now write a first answer for you to correct. Pictures without an answer are left out.

The `.gguf` and its `mmproj` projector land in the vision folder (`llm-models/vision/<name>/`, or the vision folder picked in Settings), where Settings ▸ LLM ▸ Vision model lists them.

### Checkpoint fine-tune (pictures)

The same pictures and captions as a LoRA, but every weight of the model is trained.

- **Settings**: adafactor with a small learning rate, saved in diffusers format.
- **Parameter swapping** trains part of the weights each step; it needs much less memory but is slower.
- **The result**: the saved files are joined into one `.safetensors` in ComfyUI's `diffusion_models/trained`, with a Model manager card. Load it with Load Diffusion Model.

### Bake a LoRA into a new checkpoint

When a picture LoRA has finished, the Run tab offers **Bake into a new checkpoint**:

1. Pick the base model it was trained for (ComfyUI's checkpoints and diffusion models; ★ = the same family).
2. Set the strength and the name.
3. Press **Bake**.

ComfyUI merges and saves it; the new file is moved into `checkpoints/trained` (or `diffusion_models/trained`) with a card. Baking needs this computer's ComfyUI, not a remote one.

## The LoRA trainer, peak / off-peak prices, the usage log, Remote GPU, packages in Settings (2.520.0)

## The LoRA trainer

The statusbar's **LoRA** button opens the LoRA trainer docker. It trains a LoRA from your pictures with **ai-toolkit** (by Ostris), the trainer many LoRAs are made with.

1. ⚙ **Install ai-toolkit** (once). A queue job downloads ai-toolkit into the app folder, makes its own Python environment and installs PyTorch for your card. It is about 10 GB and takes a while; follow it in the Queue.
2. **New job**: give the LoRA a name.
3. **Job tab**:
   - **Base model**: Z-Image Turbo (the easiest start), Z-Image, FLUX.1 dev / schnell, Qwen-Image, SDXL, SD 1.5, Chroma or Wan 2.1 (video). Each one says how much graphics memory it needs and whether your card has it.
   - **Your own model file** (optional): a path instead of the Hugging Face download.
   - **Trigger word**: a made-up word, e.g. `t1m_style`. It is put in front of every caption.
   - **Rank / alpha, steps, learning rate, batch, optimizer, sizes** (512 / 768 / 1024…).
   - **Caption dropout, flip, Low VRAM, quantize**.
   - **Save every / keep**, **samples every** and the **sample prompts** (`[trigger]` is your trigger word).
   - **YAML** shows the ai-toolkit config the form makes. Edit it and press ✎ **Use my YAML** to train with yours; ↺ **Back to the generated one** returns to the form's.
   - **Save** keeps the job.
4. **Dataset tab**: add 10-30 pictures with **Pictures…**, by dragging them in, or with **From the gallery**. Write a caption under each one, or let the assistant write them: **Caption the empty ones** / **all** (writes every caption again).
5. **Run & samples tab**: ▶ **Start training**. The queue shows step N / M and the loss, and the samples appear as ai-toolkit makes them. **Stop** cancels the run.

When the run finishes, the LoRA is copied into ComfyUI's `loras/trained` folder with a Model manager card (the trigger word as its keyword) and the last sample as its picture. It is ready to pick in the Model manager.

**Export job** downloads config.yaml plus the dataset as a .zip, to train on a bigger machine (a RunPod pod's ai-toolkit).

## Peak and off-peak prices

Settings ▸ General ▸ Energy cost:

- **Peak price per kWh** and **Peak times**: days (Mon-Sun) plus from-to times. Add as many windows as your tariff has; a window like 22:00-02:00 runs through midnight.
- **Every minute outside the peak times is off-peak**, at the normal price per kWh.

The power meter files every reading as peak or off-peak, so a job that ran across both is split:

- its ⚡ card and its `[power]` log line show peak Wh at the peak price + off-peak Wh at the off-peak price + its share of the daily supply charge;
- "⚡ since start" says whether it is peak now.

## The usage log

**Usage…** (Settings ▸ General ▸ Energy cost), or a click on the ⚡ figure in the statusbar, opens the usage docker:

- **Ranges**: today, 7 days, this month, last month, everything, or your own dates.
- **Totals**: the bill for the range (energy + supply + remote GPU), the energy while the app ran (peak / off-peak), the jobs and their energy and cost.
- **Days**: kWh, peak / off-peak, jobs, hours, energy, supply, remote, total.

- **Jobs**: every finished job with its mode, what it was, status, minutes, kWh, peak kWh, average watts, cost and the remote GPU it ran on.
- **CSV** downloads the table you are looking at.

The log is kept in the app folder's `usage` folder: one file a month.

### Settings ▸ Remote GPU

Generate on another machine's graphics card:

- **This computer** (the normal way).
- **Another machine's ComfyUI**: its address (e.g. `http://192.168.1.20:8188`, started with `--listen`) and what it costs an hour (optional).
- **RunPod**: your API key (runpod.io ▸ Settings ▸ API Keys) lists your pods with their card and price. Start / stop a pod and pick it; the app uses its ComfyUI through RunPod's proxy (the port, 8188 by default, must be exposed as HTTP).
- **SSH tunnel**: user@host, port and key file. ▶ **Open the tunnel** forwards the machine's ComfyUI to this computer.

✓ **Test** asks that ComfyUI for its card and version. **Use it** points the app at it (the app then does not start its own ComfyUI); **Use this computer** puts everything back.

The models a job uses must be on that machine. The power meters see only this computer, so a remote job's cost in the usage log is its time × the hourly price (a RunPod pod's own price).

### Settings ▸ Models: This computer & package

The top of the Models tab shows:

- your graphics card, RAM and processor;
- the package installed and the one for this computer;
- the four packages, with what each lets you use (✓ ~ ✗, in it / add later).

✎ **Not right?** corrects the hardware, the same way setup asks for it.

⬆ **Upgrade to …** moves to a bigger package without running setup again. In the background it installs what the package adds (ComfyUI and its node packs when there is none yet, the assistant, voices, speech to text) and downloads its models; gated models need your Hugging Face token from Settings ▸ General. The log and the progress show under the button.

### Grouped downloads

On the models page (setup's last step and Settings ▸ Models ▸ Model downloads), every group has its own checkbox. It ticks or unticks the whole group and shows how many files the group has to get and their size. A part-ticked group shows a dash.

## Setup asks for your hardware and picks a package; the daily supply charge (2.519.0)

**Setup's first page** shows your graphics card, RAM and processor. When it cannot find one of them (a card that is not NVIDIA, a card whose memory Windows does not report, a processor without a name), it asks:

- **Graphics card**: pick it from the list (NVIDIA RTX 50 / 40 / 30 / 20 series and workstation cards, AMD Radeon, Intel Arc, Apple Silicon, "No graphics card", or "Another card" with its name and memory).
- **System memory (RAM)** and **Processor (CPU)**.

Windows' Task Manager ▸ Performance shows all three. **Not right? Tell setup your hardware** opens the same form when setup did find something but got it wrong.

**Your package** (setup's second page) offers four packages, with the one for your computer picked:

| Package | For | Installs |
|---|---|---|

| | | |
|---|---|---|
| Editor | any computer | the full video and image editor, CAD and 3D sketching, sound and delivery - no ComfyUI, no models |
| Editor + small AI | 6-12 GB graphics card | + ComfyUI, Anima and SDXL pictures, background removal, speech to text, voices, a small assistant |
| Editor + mid-size AI | 12-20 GB | + Krea 2 / FLUX 3 Klein pictures, Kontext and Qwen Image 2.1 editing, MiniMax H3 at a smaller size, songs, upscaling |
| Everything | 20 GB+ | the whole studio at full size |

Under the packages, **What you'll be able to use** lists every feature for the package you picked:

- ✓ works well; ~ works, but slower or at a smaller size; ✗ not on this computer, with the reason (for example "needs about 14 GB of VRAM (this card has 12)").
- **in this package** / **add later** (Settings ▸ Models adds it any time).
- The editing features work on every computer. The AI's memory needs are estimates.

The Install button names the package and the download size. A package bigger than your computer runs well says **Install anyway**. The Editor package installs no ComfyUI and no models and opens the studio straight after.

From a terminal: `node scripts/setup-cli.js --packages` prints the same list, and `--package editor|light|standard|full` with `--gpu ID --vram GB --ram GB --cpu "NAME"` installs it.

**Daily supply charge** (Settings ▸ General ▸ Energy cost): the fixed amount per day on your electricity bill. A job's cost adds its share of it for the time it ran (a 30-minute job carries 1/48 of a day's charge):

- the job's ⚡ card shows the total (for example "⚡ 125 Wh · $0.06");
- its tooltip and its `[power]` line split it into energy and supply;
- "⚡ since start" adds the share since the app started.

## Queue presets, the Model manager, Civitai downloads, energy cost, the Testing docker (2.518.0)

**Queue presets** (the menu bar, beside the project buttons) set how the job queue runs:

| Preset | Power limit | Rest between jobs | Waits while a card is hot |
|---|---|---|---|
| Normal | the card's own | none | never |
| Quiet (overnight) | 70 % | 20 s | from 80 °C until 70 °C |
| Eco | 60 % | 10 s | from 78 °C until 68 °C |
| Cool-down between jobs | the card's own | 60 s | from 75 °C until 65 °C |
| Max performance | 100 % (the default put back) | none | from 90 °C until 80 °C |
| Custom | your four numbers (in ) | | |

- says what the preset does, whether the power limit was set, a job it is holding ("rest between jobs: 12 s left") and warnings ("GPU 0 is 86 °C", "probably throttling").
- The badge beside the dropdown shows while a job is held and ⚠ with a warning.
- A power limit needs the app run as administrator (Windows) or with sudo (Linux), and lasts until the computer restarts. Without the rights it says so, and the rest of the preset still works. Picking Normal puts the cards' default limit back.
- The job that starts after a hold says so in its log: `[queue] waited 20 s - …`. A hold for heat gives up after 20 minutes, so a stuck sensor never stops the queue for good.
- Compiles (ffmpeg only) never wait.

**The Model manager** ( Models in the statusbar) is a floating docker: float it, or dock it beside or inside another docker.

- **Tabs**: Models (ComfyUI's checkpoints and diffusion_models folders, with extra_model_paths.yaml), LoRAs, Civitai, Model paths (2.580.0, below).
- **Filters**: search (name, type, keywords), category, type, sort (A-Z, newest, rating, size). reads the folders again.
- **A card** shows the thumbnail, name, ★ rating, release date, the model type (SDXL, Pony, Illustrious, Flux, Qwen, Krea, Anima, Wan, LTX …) and the category (image, image edit, video, music). LoRA cards add their keywords; click one to put it in the prompt.
- **Hover a card** to see its description card beside it: the description, base model, cfg, steps, sampler, VAE, text encoder, keywords, size and file. It closes when the pointer leaves.
- **Where a card's details come from**, later ones winning:
  - the file itself: its name, folder, safetensors header or GGUF header;
  - what other tools left beside it (`<name>.civitai.info`, `<name>.metadata.json`);
  - `<name>.bitgen.json`: the Civitai answer and your own edits.

The thumbnail is `<name>.preview.png` / `.jpg` / `.webp` beside the model.

- ✎ **on a card** edits it: name, your rating, type, category, cfg, steps, VAE, text encoder, keywords, release date and description. They are saved beside the model.
- **on a card** looks the file up on Civitai by its SHA-256. The file is read once and the hash is kept.
- **Select**: click a model card for the model, and click LoRA cards to add or remove them (each has a weight).
- ☐ **Override the style's model + LoRAs**: ticked, Basic Settings renders with the selection. This turns Override style on, sets the checkpoint override to the model, adds the LoRAs as temporary LoRAs, and uses the card's steps and cfg. Unticked, everything is put back as it was.
- **+ New style from it**: a new style from the selected model and LoRAs. The style that renders its type is copied (its workflow, text encoder, VAE, sampler and negative), or another you pick; the model, the LoRAs and the card's cfg, steps, VAE and text encoder replace those. A video model makes a video style, with the model in its first sampler phase.
- **A ComfyUI that is installed but not set in Settings** (2.622.0): when Settings ▸ ComfyUI ▸ Folder is empty, bitGen looks for a ComfyUI on this computer - $COMFYUI_PATH, beside bitGen Studio, your home folder (ComfyUI, the portable build, Documents, Desktop, Downloads), Pinokio, Stability Matrix, the top of each drive, ComfyUI Desktop - and its **checkpoints** and **diffusion models** (and unet) fill the Model manager, Basic Settings' checkpoint list and the video Model list. The status line says where it was found; Settings ▸ ComfyUI ▸ Folder shows it with **Use this folder** to set it for good.

**Civitai** (Settings ▸ General ▸ Civitai, then the Model manager's Civitai tab):

- Paste your API key (civitai.com ▸ Account settings ▸ API Keys) and **Test key**.
- Pick **civitai.red** (everything your account's content level allows) or **civitai.com** (safe for work only). **Mature results** adds mature results and pictures where your account allows them.
- **Search** by words, type, sort and base model, then click a result to see its versions. on a file downloads it straight into the right ComfyUI folder:

| Civitai type | Folder |
|---|---|
| Checkpoint | checkpoints (a GGUF, or a file with no VAE / text encoder inside → diffusion_models) |
| LoRA / LoCon / DoRA | loras |
| VAE | vae |
| Embedding | embeddings |
| ControlNet | controlnet |
| Upscaler | upscale_models |

A subfolder you type is kept. There is no moving and no Save As. Its card (picture, base model, keywords, the example pictures' cfg and steps) is written beside it. The same file already there is not downloaded again.

- The key is saved in `custom.settings` and sent only to Civitai.

**Energy cost** (Settings ▸ General): your electricity price per kWh and the currency. Every finished job's ⚡ card, its `[power]` line and the System stats' "⚡ since start" then show what it cost (for example "⚡ 125 Wh · $0.04").

**Testing** (Settings ▸ General ▸ Testing…) opens a floating docker with the tests this version needs, release by release.

- **auto** items tick themselves as the app sees them work: a job of that style finished, nvidia-smi answered, a Civitai download landed in loras, and so on.
- The others have ✓ (works), ✗ (does not) and – (not tested) buttons, and every item has a note.
- **Save log** downloads `bitgen-test-log-<version>-<date>.txt`. It has the computer, every item with how it was decided, your notes, the failed jobs' last log lines, and the same as JSON. Upload that file to Claude.
- Ticks and notes are kept in `custom.settings`, and ↺ **Clear** starts again.

## Power draw and clock speeds, the energy a job used; Anima image styles (2.517.0)

**System stats** (the left dock):

- **Each graphics card's frame** has two new graphs:
  - **Power**: the card's draw in watts, scaled from 0 to its power limit.
  - **Clock**: its core clock, scaled from 0 to its top clock, with the memory clock beside it.
  - Its title adds the watts and the GHz.
- **CPU clock**: the processor's current speed.
  - On Windows this comes from the performance counter, so it follows boost and idle.
  - On Linux it comes from the cores themselves.
- **CPU power**: shown only when the computer reports it. Linux usually does (RAPL, readable by the app); Windows has no way to read it without a driver.
- ⚡ **since start**: the energy used since the app started.

The card readings come from nvidia-smi, which keeps running and reports once a second.

**The energy a job used.** When a job ends, the app works out the energy used from its start to its end. It records:

- the total in Wh or kWh: the graphics cards, plus the CPU where it can be read;
- the average and peak watts;
- how long the job ran.

This shows in three places:

- a **[power]** line at the end of the job's log;
- ⚡ **… Wh** on the job's card in the queue's Done tab (its tooltip has the details);
- the project's job list, so it is still there after a restart.

The figure covers the whole card and CPU while the job runs, so anything else using them then is counted too. A computer without nvidia-smi gets the CPU only, where the CPU can be read.

**Anima image styles** (in the image styles list): CircleStone Labs' 2B anime and illustration model, run through ComfyUI.

- **Anima** uses Aesthetic v1.1, the one to start with.
- **Anima base** uses Base v1.0.

- Both run 30 steps at cfg 4 with er_sde, and come with the model card's negative prompt.

Where the files go:

| File | Folder |
|---|---|
| `anima-aesthetic-v1.1.safetensors` / `anima-base-v1.0.safetensors` | `models/diffusion_models` |
| `qwen_3_06b_base.safetensors` (the text encoder) | `models/text_encoders` |
| `qwen_image_vae.safetensors` | `models/vae` |

All of them come from circlestone-labs/Anima, and the models setup lists them.

Prompting:

- Start the prompt with `masterpiece, best quality, score_7, safe,` .
- Danbooru tags, plain words or both work.
- About 1 MP works best: 1024 × 1024, 832 × 1216 and so on.
- The licence is non-commercial for the model and LoRAs, but the pictures it makes may be used commercially.

## Keyframes on any setting; Krea 2 image styles (2.516.0)

◇ **Keyframes on any setting.** A clip's settings in the timeline's Properties, and in the Colour dialog, now have a small ◇ beside them.

1. Move the playhead to where the change starts, set the value, and click ◇. It becomes ◆: a key at that moment.
2. Move the playhead and change the setting. That makes a second key by itself, because once a setting has keys any change to it is keyed where the playhead is.
3. A keyed setting has an orange edge and shows its value at the playhead. Click ◆ to take away the key at the playhead, or **Alt+click** to take away all its keys.

What can be keyed this way:

- **Colour**: exposure, contrast, saturation, temperature, tint, hue, LUT mix, and in the Colour dialog the wheels' brightness and the HSL ranges.
- **Effects**: lens, warp amount, size and speed, and the keyer's match, edge and spill.
- ✒ **Masks**: feather, expansion and opacity. A mask's shape keys with its own ◇, as before.
- **Text**: size and outline.
- **Time**: shutter, samples, posterize, and echo copies, gap, first and fade.

Position, scale, rotation, opacity, blur, sharpen, glow, vignette, grain, crop, generators, rays, distortions, shapes, text animators and 3D could be keyed already. Every keyed setting is listed in the **Graph Editor** with its value and speed graphs, eases and Bézier handles.

How ⚙ Compile handles each kind:

- **Colour** keys: the look is re-made every quarter second between keys and the looks are cross-faded.
- **Lens, warp and keyer** keys are animated by the compile itself, on V1 and on video layers.
- **Mask** keys go into the mask's video.
- A **picture or text layer** with keyed settings, and a **video layer with keyed time effects**, are rendered by the app frame by frame.
- Not yet covered: adjustment layers, and the colour wheels' colour (the puck), which is not a number box.

**Krea 2 image styles** (in the image styles list). These need ComfyUI with Krea 2 support (0.26 or later):

- **Krea 2 Turbo**: 8 steps, cfg 1.
- **Krea 2 Raw**: the full model, 52 steps, cfg 3.5, with a negative prompt.
- **Krea 2 Turbo GGUF** and **Krea 2 Raw GGUF**: the same, from a GGUF file.

If they are gone from the list (2.547.0): they come back by themselves once, the next time bitGen starts. Any other built-in style that went missing: Settings ▸ Image styles (or Video styles) ▸ ↺ **Built-in** lists the built-in styles that are not there and puts them back after you say yes. Your own styles and the ones you edited are never touched.

Where the files go:

| File | Folder |
|---|---|
| `krea2_turbo_fp8_scaled.safetensors` / `krea2_raw_fp8_scaled.safetensors` (Comfy-Org/Krea-2) | `models/diffusion_models` |
| `krea2_turbo-Q5_K_M.gguf` / `krea2_raw-Q5_K_M.gguf` (vantagewithai's Krea-2-Turbo-GGUF / Krea-2-Raw-GGUF) | `models/unet` |
| `qwen3vl_4b_fp8_scaled.safetensors` (text encoder) | `models/text_encoders` |
| `qwen_image_vae.safetensors` (VAE) | `models/vae` |

Notes:

- The models setup lists every file with its download.
- Any GGUF quant works; set the style's **Model** to the file you have. Q8_0 is 13.7 GB, Q6_K 10.6 GB, Q5_K_M 8.9 GB (fits a 12 GB card) and Q4_K_M 7.5 GB.
- The GGUF styles need the ComfyUI-GGUF custom nodes in a version that knows Krea 2. If ComfyUI says *Unexpected architecture type*, update ComfyUI-GGUF; if that doesn't fix it, use a fork that supports Krea 2 (molbal/ComfyUI-GGUF).
- Krea's style LoRAs (`krea2_*.safetensors`) work in the style's LoRA slots on both Turbo and Raw.

## Cut out a subject, solve the camera, remove an object; theme edit mode for dialogs (2.515.0)

Three new sections are in a video clip's Properties on the timeline, for V1 or a video layer: **Cut out**, **3D camera track** and **Remove**. Each one works on the clip's whole length in the background, with a progress line and ■ **Stop**.

**Cut out: a subject followed through the shot**

1. Pick the clip and go to the frame where the subject is clear.
2. Press **✚ Subject** and click the subject on the picture. Press **✖ Not it** and click anything next to it that is not part of it. Or press ▭ **Box** and drag a box round it. Click a mark to take it away.
3. If the cut-out goes wrong at another frame, move the playhead there and add marks. Each frame follows the nearest frame that has marks.
4. Choose how the subject is followed:
   - **Auto** uses the best one that is installed.
   - **SAM 2** (Segment Anything 2) is the best. ⬇ **SAM 2** installs it into the AI matte's venv: torch, the sam2 package and its checkpoint, about 1–3 GB.
   - **AI matte** (BiRefNet) uses the same install as Select ▸ Subject.

   - **Built in** uses OpenCV and needs nothing installed.
5. **Refine edge**:
   - **snap** fits the edge to the picture's own edges (hair, fur).
   - **feather** softens it.
   - **choke** shrinks the edge (or grows it, with a minus number).
   - **smooth** stops the edge flickering from frame to frame.
6. Press ▶ **Cut out**. The result is saved in the project's videos as `cut_<clip>_….webm`, with the subject's see-through edge and the clip's sound.

On a video layer, **use it** makes the layer see-through round the subject, on the canvas and in ⚙ Compile. On V1 the box only shows a preview, because nothing is below V1. The cut-out is also what **Remove** takes out and what **3D camera track** leaves out.

**Remove: content-aware fill for video**

1. Choose what goes: **the cut-out** or, on a video layer, ✒ **the masks** (drawn with the Mask Pen; they can move).
2. Set the options:
   - **grow**: the hole made bigger, to take an edge or a shadow too.
   - **feather**: the soft join.
   - **look**: how many seconds before and after are searched.
   - **Auto** fills the hole from the frames round it, lined up on this one. It paints in only what the shot never shows, and keeps that part still. **Paint in only** is faster, but it may shimmer.
3. **Reference** (optional): one frame you have filled yourself. ✎ **Paint one** opens the frame at the playhead in the image editor with the hole see-through. Fill it with Generative Fill or the Clone Stamp, press **Ctrl+S** to save it to the project's Images, then pick it here.
4. Press ▶ **Remove**. The clip now plays `<clip>_fill….mp4` (`.webm` for a webm clip). It is the same length and times as the original, with its sound. ↺ **Original** puts the clip back on its own file.

**3D camera track: put layers into the filmed scene**

1. Choose how the camera moved: **Auto**, **Moving camera** or **Tripod** (it only turns). Leave the lens at **0** to have it worked out, or type its across angle in degrees. Tick **leave out the cut-out** so that a person or a car moving on its own is not used.
2. Press ▶ **Solve**. The line shows how many frames were solved, the lens, the error in pixels and how many points were found. The points are drawn on the picture; when the solve is good they stay stuck to the scene as it plays.
3. **Pick**: click points (Shift adds more) or drag a box round them.
4. Choose a layer (or **New text**), then **flat on them**, **standing on them** or **facing the camera**, and a size (a share of the frame's width where it stands). Press **Place**. The layer becomes a 3D card in the scene.
5. **Drive the 3D camera** keys the 3D camera every frame from the solve: position, aim, zoom and the new **roll**. Place does this by itself, so every 3D card sits in the shot. The tracked clip should fill the frame across and be centred, as V1 is.

**Theme edit mode for dialogs**

- **Ctrl+Shift+Alt+E** turns edit theme mode on with the dialogs included. An open dialog such as Settings stays open, and its buttons, labels and boxes are picked and styled like the rest of the app. The Style panel, the outline and the handles go inside the dialog. Esc closes the Style panel, never the dialog.
- **Ctrl+S** in edit theme mode (either way in) saves the theme to `themes/<name>.json` and leaves edit mode. A theme with no name yet asks for one.
- Ctrl+Shift+Alt+E again leaves, with the usual box when there are changes.

## Edit theme mode: every button and its words (2.623.0)

In edit theme mode () every docker, panel and button can be picked and its words changed:

- **Double-click any words** - a button, a docker's title, a tab, a label, a heading, a hint - and a box opens over them: type the new words and press Enter (an empty box = its own words again), or Esc to leave them. A button keeps its icon, a docker's title keeps its ▾ and its buttons.
- **Dropdowns**: click one and the Style panel lists its **Options** - rename any of them (what it does stays the same).
- **Placeholder and Tooltip**: the Style panel changes the words shown in an empty box and the help shown when the pointer rests on anything.
- **The floating tool panels** (the timeline's stage panels, DLSS 5, SeedVR2, the voice chat) are picked and styled like the dockers.
- **Alt+click** gives the click to the app - open a collapsed section, a tab, a docker or a menu - without leaving edit theme mode, so the parts inside can be reached and edited too.

All of it is kept with the theme ( Save theme), and ↺ Clear element styles puts every word back.

## Edit theme mode: resize, move, hide, rename; leaving saves; folding dockers (2.514.0)

**Edit theme mode () can now change the layout.** Pick an element as before, then:

- **Resize** it with the eight handles round its outline. The left and top handles keep the opposite edge where it is.
- **Move** it by dragging inside it. The Style panel's **Layout** section shows the move as **Δx / Δy**.
- Type an exact **Width / Height** (4 to 4000 px) in the Layout section.
- **Hide** it. In edit mode a hidden element shows faint with a dashed outline so you can pick it again; once you leave edit mode it is gone.
- **Hidden in Expert mode** (2.544.0): the element is gone while Settings ▸ General ▸ Expert mode is on, and shown in Basic mode. In edit mode with Expert mode on, it shows faint with a blue dashed outline so you can pick it again.
- **Text**: change the words of a label or a plain-text button.
- **↺ Layout** puts the size, the move, the hiding and the text back.

**Your changes are kept as you go.** Every change is written to `themes/<theme name>.tmp`. If the app closes before you save, the next time you start edit mode a box offers **Bring them back** or **Throw them away**.

**Leaving edit mode** ( or Esc) with changes opens a box:

- **Save theme "<name>"**: saves into `themes/<name>.json`. A theme that has no name yet asks for one.
- **Save theme as…**: saves under a new name, which becomes the current theme.
- **↺ Reset theme**: goes back to how the theme was when edit mode began.
- **Not now**: leaves edit mode with the changes showing but not saved. The `.tmp` keeps them.
- **Cancel**: stays in edit mode.

**Folding the side dockers.** Each side docker's title bar has a ▾ at its left. Click it to fold the docker to a thin strip that keeps its title, which gives the rest of the window more room. Click ▸ to open it again. The app remembers which dockers are folded.

**The image editor's dockers.**

- Each group of tabs (Layers, Properties, History …) starts with ▾. Click it to fold the group to its tabs, and click a tab to open it again.
- Each group's ✕ closes it.

- **View ▸ Dockers** in the image editor's menu lists every image editor docker with a tick. Click one to show or hide it, or use **All Dockers** to bring every one back.
- The × on a floating docker window now works. It was covered by the corner you resize the window with.

## Load UE project, the timeline's frame size bar (2.513.0)

**Where to open an Unreal project.** Open it in **Unreal**, as always. bitGen links to the Unreal Editor through the bitGen Bridge plugin, and Unreal must have the project open for the link to work.

**Load UE project** (in the menu bar, after ):

1. The folder dialog opens. Pick your Unreal project's folder (the one with `YourProject.uproject`) and press **Select**.
2. bitGen then does the rest by itself:
   – It puts the bitGen Bridge plugin into `<project>\Plugins\bitGenBridge`, or updates an older one.
   – It switches on the plugins the bridge needs in the `.uproject`: Python Editor Script Plugin, Editor Scripting Utilities, Sequencer Scripting, Movie Render Queue and bitGen Bridge. The old file is kept as `.uproject.bitgen-bak`.
   – It closes Unreal if it has that project open. Unreal asks you to save first, so answer it.
   – It starts Unreal again with the project. Unreal's Output Log then says `[bitGen Bridge] listening`.
3. The **Unreal project** dialog lists each step. It also shows what the project has: the plugin version, the plugins switched on, whether Unreal is open, and where the editor is.

The dialog also has:

- **Restart Unreal**: restart Unreal with the project only, without touching the plugin or the `.uproject`.
- **Test connection**: check whether bitGen is linked to Unreal.
- **Also close other Unreal windows**: tick it if another project is holding the bridge's port.
- The projects you used before.
- If the editor is not found from your Epic Games installs, a field to type the path of `UnrealEditor.exe`.

**The timeline's menu bar** (at the top of the Timeline docker) sets the **frame**: the size the timeline is made at. It applies to the canvas, the bakes and ⚙ Compile.

- **width × height**: type a size.
- **Preset**:
  – **Auto** is the V1 video's own size, as before.
  – Or pick a size: 4K, QHD, Full HD, HD, SD, the vertical sizes (Reels, Shorts, TikTok), square, 4:5, 21:9, cinema 2.39:1, DCI 2K or 4:3.
- **Aspect**: Free, 16:9, 9:16, 1:1, 4:5, 4:3, 3:2, 2:3, 21:9, 2.39:1 or 1.85:1. The aspect is kept while you type: a new width works out the height, and a new height works out the width.
- **CAD toolbar**: shows or hides the Create / 3D / Sketch / Solid toolbar over the preview.

When the frame isn't the V1 video's size, V1 is fitted inside it with its own aspect, centred on black. The canvas shows it and the compile makes it the same way.

**The CAD buttons are hidden.** In the timeline, use the menu bar's **CAD toolbar** box instead. In the image editor, use **Window ▸ CAD Toolbar**. It still shows by itself while a sketch or a 3D body is picked.

## Lottie (JSON) export (2.512.0)

**Export → Lottie (JSON)** turns the timeline's picture and text layers into a Lottie animation: a JSON file for web pages, apps and any Lottie player. It is saved as `<project>_lottie.json` beside the movies, and Export lists it to download.

- **Real animated layers.** A layer that only moves, scales, turns or fades stays an animated layer, with its picture inside. Its ◆ keys keep their eases: linear, in, out, in-out, a custom curve, or hold. Its blend mode and the layer's opacity are kept. A text goes in as its picture.
- **Frames.** A layer the app draws itself goes in as its frames: one picture a frame, with repeats shared. That covers masks, effects and looks, generators and particles, warps, 3D, parents, expressions, a keyed text colour, entry or exit transitions, and a curved motion path.
- **Left out.** Video layers, the base video and track mattes are left out, because a Lottie has no video. The message names what was left out.

The export was checked by playing the file in lottie-web, the standard Lottie player. It drew the same picture as the timeline at every moment tested.

## Variable mask feather, data-driven animation and template fields (2.511.0)

✒ **Variable mask feather.** With the ✒ Mask Pen on a closed mask, **Shift+drag a point**. That point gets its own feather, as far as you dragged, and a dashed ring shows it. The edge softens by the feather of the nearest place on it: along each piece of the edge the feather glides from one point's to the next. The points without one keep the mask's feather. Animated mask paths glide the point feathers between keys too. **variable feather** × in the mask's row puts every point back to the mask's feather. The compile matches the canvas, video layers' mask videos included.

**Data.** Under **Data & fields** in any layer's Properties, **Import CSV / JSON**:

- A **CSV** (commas, semicolons or tabs; quoted values) uses its first line as the column names.
- A **JSON** file can be a list of records, an object holding one, or columns of values.

The file becomes a named **data set**, saved with the timeline. Each set has a current **row**; change the row and everything that reads it changes.

- **In a text**: `{{sales.region}}` shows the current row's region, and `{{sales.region.3}}` shows row 3's. A name the data doesn't have stays as written. The compile's text pictures carry the values.
- **In ƒx**: `data("sales", "amount")` gives the current row's amount as a number, and `data("sales", "amount", 3)` gives row 3's. For example, `data("sales", "amount", floor(t) + 1)` steps through the rows, one a second.
- **Data → keys**: pick the set, a column and a property (opacity, scale, x, y, turn), then **s per row**, the rows **from … to**, and **x** (a factor) **+** (an offset). **Make keys** keys one row every so many seconds, for bar charts, counters and the like.

**Template fields.** Expose a layer's properties with a label: its text colour, opacity, scale, x, y or turn. Every exposed field on the timeline is listed under **exposed on this timeline**, so you can change them in one place. A template saved from these layers offers the fields, as colours and numbers, when it is dropped in. A keyed property's keys move by the change.

## 2D layers in 3D: cards, a moving camera, depth of field, shadows (2.510.0)

**3D layer.** In a layer's Properties (a picture, text, shape, generator or video layer), tick **3D layer**. The layer becomes a card in 3D space:

- **x / y**: the layer's usual move.
- **depth z**: in pixels. A higher number is further away.
- **x turn °** and **y turn °**: tip it back or swing it round. Its usual turn is the turn about z.
- **casts shadows** and **accepts shadows**.

Depth and the two turns can be keyed (◇).

**3D camera.** All 3D layers are seen through one camera, set in the Properties of any 3D layer:

- **position x / y / z**.

- **aim at x / y / z**.
- **zoom**: the camera's lens. With the camera at z = −zoom, a card at z 0 is exactly its 2D size, so ticking 3D changes nothing until you move something.

Every number can be keyed at the playhead (◇). Once a number has keys, changing it makes a key, and between keys the camera glides. **reset** puts the camera back to straight ahead.

**Orbit** (Shift+O) moves the camera on the canvas:

- **drag**: orbit round where it aims.
- **Shift+drag**: dolly closer or further.
- **Alt+drag**: track (the camera and its aim together).

**Depth of field.** Tick **depth of field**, then set the **focus** distance and the **aperture**. A card at the focus distance is sharp. A card one focus distance away is blurred by the aperture in pixels.

**Shadows.** Tick **light (shadows)** and place the light (**x / y / z**). Cards that cast throw the shape of their picture onto the cards behind them that accept. A video layer casts the shape of its box. Set the **darkness %** and the **softness px**.

**Stacking and the compile.** Cards stack in their layer order, as the timeline's 2D layers do, so put the far ones lower. 3D picture layers are rendered by the page frame by frame. 3D video layers are baked whole with their sound kept. When the camera, the light or another card changes, they are rendered again, so the result matches the canvas.

## Motion sketch, the wiggler and the smoother (2.509.0)

All three are under **Motion** in the Properties of a picture, text, shape, generator or video layer. Each one makes plain keys that you can edit in the graph editor afterwards.

✍ **Motion sketch.** Pick a layer and put the playhead where the move should start.

1. Press ✍ **Sketch**, or choose the ✍ tool (**Shift+K**).
2. Press on the canvas and move the pointer. The timeline plays from the playhead and the layer follows the pointer. It starts from where it was, so it doesn't jump to the pointer.
3. Let go to stop. The sketch also stops at the end of the layer.

The path becomes position keys. Keys it passed over are replaced.

- **speed %**: how fast the timeline plays while you sketch. 100 is real time. Lower gives you more time for a careful move; it plays back faster.
- **smooth px**: only keys that change the path by more than this are kept. Higher means fewer keys and a smoother path.

≈ **Wiggler.** Adds random movement to a property.

- **property**: position (x, y), x, y, scale, turn, opacity, or a keyed generator or light-ray number.
- **per s**: how often it changes.
- **amount**: how far, either way.
- **noise**: smooth (a flowing curve) or jagged (a new value each time).
- **x, y apart**: for position, x and y wiggle on their own. Off, they wiggle together.
- **seed**: a different wiggle for each number.

The wiggle works between the property's first and last keys, riding on the move already there. If the property has fewer than two keys, it covers the whole layer.

**Smoother.** Calms a property's keys between its first and last key. It needs at least three.

- **frames**: the move is averaged over this many frames either side.
- **tolerance**: only keys that change the value by more than this are kept.

The result is fewer keys with the same overall shape. The ends stay where they were.

## Audio → keys, waveform and spectrum layers (2.508.0)

The app reads the timeline's sound: its loudness, its waveform and 64 frequency bands over time. The sound can be one clip or **All sound (the mix)**: every sound clip, and the sound of every video clip that plays, at its volume. A file is read once and remembered.

♪ **Audio → keys** is in the Properties of every picture, text, shape, generator or video layer.

1. Pick the **sound**.
2. Pick what to follow: **loudness**, **bass** (30–250 Hz), **mids** (250 Hz–2 kHz) or **treble** (2–12 kHz).
3. Pick the **property**: opacity (0..1), scale (1 = 100 %), x, y, turn, or the layer's own generator or light-ray numbers.
4. Set the value when it is **quiet** and when it is **loud**, and the **smooth** (frames either side to average over).
5. Press ♪ **Make keys**.

The property is keyed over the whole length of the layer. The quietest moment of that stretch gets the quiet value and the loudest gets the loud value. Only the keys that matter are kept, at most 400. Keys already on that property are replaced, and the keys can be edited afterwards like any others.

**Waveform.** With the Generator tool, **Alt+click** on the canvas. In the layer's Generator:

- **sound**.
- **style**: wave (filled), line or bars.
- **x / y** (from the frame's centre), **width**, **height**.
- **span s**: how many seconds of sound are shown around the playhead. Small is a close-up of the wave.
- **gain %**, **thickness**, and **colours** left → right.

**Spectrum.Alt+Shift+click** with the tool. Its frequencies run from low (left) to high (right). In the layer's Generator:

- **sound**.
- **style**: bars, line or circle (bars around a ring).
- **bands** (4–64), **gain %**, **gap %** between bars.
- **floor %**: anything quieter shows nothing.
- **thickness**, and **colours** low → high.

Every number can be keyed (◇) or given an expression (ƒx).

**ƒx audio().** In any expression, `audio()` is the loudness of the mix at that moment (0..1). `audio("bass")`, `audio("mid")` and `audio("treble")` follow the bands. For example, `value * (1 + audio() * 0.5)` pulses with the music. Both are in the ƒx presets.

**The compile.** Waveform and spectrum layers are rendered by the page frame by frame, from the same reading of the sound, so the result matches the canvas. The page waits for the sound to be read before it renders.

## Puppet pins and mesh warp (2.507.0)

**Puppet pins.** Pick a layer (a picture, text, shape, generator or video layer). Then choose the **Puppet** tool (**Shift+W**).

- **Click** on the layer to put down a pin. Put down a few: at the ends of an arm, the head, the feet.
- **Drag** a pin and the layer bends to follow it. The other pins hold the picture where they are. Near a pin the picture turns and shifts with it, without stretching.
- **Alt+click** a pin to remove it, together with its keys.
- The bent picture may reach past the layer's own edges.

**Animating the pins.** Press ◇ **key here** in **Warp** (in the layer's Properties). It keys every pin at the playhead. From then on, every drag makes a key at the playhead, and between keys the pins glide (the keys have the usual eases in the graph editor).

**Mesh warp.** Tick **Mesh warp** in Warp. A grid of points (**columns** × **rows**, up to 8 × 8) appears over the layer. Drag its points with the tool. The picture follows smooth curves through them, not straight lines. **reset** puts every point back. Mesh points are keyed by ◇ key here like the pins. Pins and the mesh can be used together.

**Warp settings:**

- **on**: turn the warp off and on.
- **falloff**: how far a pin's pull reaches. Low is wide and soft, high stays close to the pin.
- **detail**: how fine the triangle mesh it is drawn with. Higher is smoother on strong bends.
- ×: remove the pins, the mesh and their keys.

Pins and points are kept as fractions of the layer's own picture. A warp rides with the layer when it is moved, scaled or turned.

**The compile.** Warped picture layers are rendered by the page frame by frame. Warped video layers are baked whole by the page with their sound kept, the same as light rays (2.506.0). The result matches the canvas.

## Particles and light rays (2.506.0)

**Particles.** With the **Generator tool**, **Shift+click** on the canvas. A particle emitter appears where you clicked: a fountain of soft sparks that rise and fall back. Select the layer. In **Generator** (kind **Particles**) you can set:

- **emitter**: a **point**, a **line** or a **box**. Set its **x / y** (pixels from the frame's centre) and its **width / height**.
- **per s** (how many are born a second), **life s**, and **pre-roll** (the air is already full at the start).
- **speed px/s** and its random **± %**; **direction °** (0 = right, −90 = up) and its **spread °**; **gravity** and **wind**.
- **particle**: dot (soft), circle, square, star or spark (a streak along its motion).
- **size start → end** and its random **± %**; **colours** start → end; **opacity start → end %**; **seed**.

Every number can be keyed (◇) or given an expression (ƒx). Particles are worked out, not simulated: any frame looks the same whenever it is drawn, so scrubbing, playing and the compile all agree. Give the layer a blend mode such as Add or Screen to make it glow over the picture underneath.

☀ **Light rays** are in the Properties of any picture, text, shape, generator or video layer. The bright parts of the layer streak away from a source point. The rays can reach past the layer's own edges.

- **source x / y**: pixels from the layer's centre.
- **length %**: how far the rays reach.
- **intensity %**: how strong they are.
- **threshold** (0–255): only light brighter than this makes rays.
- **tint**: the colour of the rays.
- **rays only**: hide the layer and keep its rays.

Every number can be keyed (◇) or given an expression (ƒx).

**Video layers.** A video layer with light rays is baked whole by the page when you press ⚙ Compile. Each frame is taken from the clip at its own time and drawn exactly as the canvas draws it. The compile overlays those frames, and the clip's sound is kept. A long clip takes a little while to bake. It is baked again only when something about it changes.

## Generator layers and distortions: fractal noise, gradient ramp, turbulent displace, displacement map (2.505.0)

**The Generator tool** (in the canvas toolbox) makes a layer that draws itself:

- **Click** anywhere on the canvas for a **Fractal Noise** layer covering the frame.
- **Drag** for a **Gradient Ramp** running from where you pressed to where you let go.

Select the layer to see **Generator** in its Properties. Every number can be keyed (◇) or given an expression (ƒx).

- **Fractal noise** settings:
  - **type**: basic, turbulent smooth or turbulent sharp (creased).
  - **contrast**, **brightness**, **invert**.
  - **scale** in pixels, and **complexity** (how many layers of detail).
  - **sub influence** and **sub scaling**: how strong and how fine each finer layer is.
  - **evolution** (°) and **evolution speed** (°/s): the noise moves by itself.
  - **offset** and **drift** (px/s): slide the noise.
  - **seed**, and two **colours** (dark → light).
  - **detail**: ¼ (fast) or ½. Noise is smooth, so it is worked small and drawn scaled up.
- **Gradient ramp** settings: **linear** or **radial**, the **start** and **end** points (pixels from the frame's centre) and the two colours.

Lower the layer's opacity or give it a blend mode to lay it over other layers.

**Distort** is in the Properties of any picture, text, shape or video layer:

- **Turbulent displace** pushes the layer's pixels around with fractal noise. Set the **amount** (pixels), the **size** of the swirls, the **complexity**, the **evolution speed** (it moves by itself) and a **seed**.
- **Displacement map** pushes them by another layer's picture: a Fractal Noise or Gradient Ramp layer, or any picture layer. Mid grey leaves a pixel where it is. **use brightness** moves both ways by the same amount; **red ↔ / green ↕** moves across by red and up and down by green. Set the **max across** and **max up-down** in pixels.
- Pixels move whole pixels, up to 127 either way, and the edges are smeared. The compile does exactly the same.

**The compile.** Generator layers and distorted picture layers are rendered by the page frame by frame. A distorted video layer gets two map videos (across and up-down, stored losslessly). The compile moves every frame's pixels with them, so the result matches the canvas.

## DLSS 5: enhance, upscale and frame generation for videos (2.504.0)

⚡ **DLSS 5** runs a video through NVIDIA DLSS 5, using RunningHub's ComfyUI nodes (the same step Tim's "secret sauce" workflow ends with). It does three things:

- **Neural rendering.** It cleans up and sharpens the picture. Style picks the look: default, natural (closer to the source), cinematic (more contrast), or off (upscale only). Detail sets how much of the change is kept: 0 keeps the original, 1 is the full result, 2 is more. Structure sets the local detail reconstruction.
- **Upscaling.** The sizes are 1x (DLAA: same size, enhanced), NVIDIA's fixed factors 1.5x, 1.724x, 2x and 3x, or 1K / 2K / 4K / 8K. With 1K–8K, DLSS picks the smallest factor whose short side reaches 1080 / 1440 / 2160 / 4320; a video already that big stays at 1x. A size more than 3x away is refused in words; pick a smaller one.
- **Frame generation** (optional). Real in-between frames, not blends: 2x / 3x / 4x the frame rate, or a target such as 60 fps, up to 6 times the source.

**Where.**

- The preview bar's ⚡ **DLSS 5** button works on the video you are previewing. The panel says what it will make; ⚡ **Enhance** queues it, and the result lands in the gallery with the original's sound.
- In the StoryBoard's ⚙, set **Upscaler → DLSS 5**. A scene's then sends its take through DLSS 5, at the ⚙'s Upscale resolution (720 = DLAA, 1080 = 1K, 1440 = 2K, 2160 = 4K). With "Upscale every render" ticked, each take is sent as it lands.

**Setup.** NVIDIA RTX cards only. In Settings → ComfyUI → Video accelerators, press **Install RH DLSS 5**. Then copy NVIDIA's DLLs into ComfyUI/models/dlss5/ yourself; the pack's README names them, and it never downloads them. Restart ComfyUI. Frame generation needs its own worker files in models/dlss5/dlssg/ (also in the README).

## Long video: one MiniMax H3 run up to 30 seconds (2.503.0)

A MiniMax H3 clip used to be one generation of up to 15 seconds; anything longer was rendered in 15-second pieces and joined. **Long video** renders up to **30 seconds in one generation**. One run keeps the characters, the motion and the sound continuous, with no joins. The settings are the ones Tim's "secret sauce" workflow uses: three model patches in front of the sampler.

- **MiniMax low-VRAM attention**: the attention heads run in groups (4), and buffers are freed as soon as they are used.
- **Chunked feed-forward**: the feed-forward step runs in pieces along the frames (2 pieces once the sequence passes 4096 tokens). The result is the same; the memory peak is lower.
- **Comfy kitchen attention** (optional): ComfyUI's comfy-kitchen attention backend in front.

**Turning it on.**

- **The scene board:** tick **Long video** in the StoryBoard's ⚙. A scene then renders up to 30 seconds in one go. With **Comfy Kitchen** also ticked, the kitchen attention goes in too.
- **The prompt docker's Generate:** pick the **MiniMax H3 Long (30 s)** video style, or turn Long video on in any MiniMax H3 style (Settings → Video styles → Long video: On, or On + comfy kitchen attention). The plan line under Seconds then shows a 25-second clip as one 600-frame run.
- Clips longer than 30 seconds are still split and joined, in 30-second pieces.
- Sage attention is skipped while Long video is on, because Long video brings its own attention patch. Spectrum still works with it.
- It is for MiniMax H3 only; LTX and Wan styles ignore it.

**Install.** Long video needs a recent ComfyUI-KJNodes. Settings → ComfyUI → Video accelerators has an **Install / update KJNodes** button. The kitchen attention needs ComfyUI 0.32 or later with comfy-kitchen installed (the Comfy Kitchen section above it). If this machine has already learned a lower VRAM ceiling from a run that ran out of memory, that ceiling still applies.

The same panel can also install **Yusu H3 Unified** (a one-node front end for MiniMax H3, for imported workflows that use it) and **RH DLSS 5** (NVIDIA RTX enhance / upscale / frame generation). For DLSS 5, NVIDIA's DLLs go into ComfyUI/models/dlss5/ yourself; the pack never downloads them.

The export also ran its turbo LoRA at 8 steps. Add a turbo LoRA and set Steps in Basic Settings for the same speed.

## FLUX 3 Image Klein, and edit image mode lists only edit styles (2.502.0)

**FLUX 3 Image Klein** is Black Forest Labs' 5.6B open image model (October 2026). Three new image styles use it:

- **FLUX 3 Klein**: the distilled model, 16 steps at cfg 1 (4 to 16 steps work). Fast.
- **FLUX 3 Klein base**: the base model, about 50 steps at cfg 3.5, with a real negative prompt. Slower, and the one LoRAs are trained on.
- **FLUX 3 Klein edit**: edits a picture from up to 4 reference pictures. Picture 1 sets the output size. In the prompt the pictures can be named `<ref_image_0>`, `<ref_image_1>` and so on, in order.

The text-to-image styles also take the reference dock: with pictures in it they switch to their edit graph by themselves (the base style to the base edit graph). They never switch to a FLUX.2 graph.

**Models.** Settings → Setup lists the three files: the distilled and base int8 weights and the Qwen3-VL 4B text encoder. The VAE is FLUX.2's `flux2-vae.safetensors`. The Hugging Face repo is gated: accept the FLUX Kommunity licence there first and add your token. bf16 and nvfp4 builds are in the same repo; set the style's Model to use one. FLUX 3 needs ComfyUI 0.41.0 or later. It works best with long, specific prompts.

**Edit image mode.** While the image editor is open and the prompt docker's ▾ is on **Edit**, **Replace background** or **Compose**, the image style dropdown lists only styles that can edit a picture: the FLUX 3 and FLUX.2 Klein styles, Qwen Image Edit, FLUX.1 Kontext and the like. 2.549.0: on **Generate**, Refine, Fill or Remove EVERY style is listed (Krea 2, SDXL ...), and picking one that cannot edit while the ▾ is on Edit puts the ▾ on Generate. Close the editor and the style you had picked before is back. The edit style you used last is picked again the next time you edit.

## Time remapping on a curve (2.501.0)

A video clip's **Speed** section now has **Time remap**. It sets which second of the source shows at each moment of the clip.

- **Turn it on** and the clip gets a curve that plays it exactly as it plays now (its speed, ramp or reverse become keys). Speed, reverse and ramp are switched off while the remap is on, and come back when you turn it off.
- **The curve.** Across is the clip's own time on the timeline; up is the source second that shows.
  - Rising plays forward, falling plays backwards, flat is a freeze. Steeper is faster.
  - Drag a key to move it. Double-click the curve to add a key; double-click a key to remove it.
  - The last key's time is the clip's length on the timeline.
- ◇ **Key** adds a key at the playhead, on the curve where it is.
- ❄ **Freeze** holds the frame at the playhead for the seconds beside it; the rest of the clip moves later.
- **The key row** shows the chosen key's time and source second. Type new values, or × to remove it.
- **Trimming.** Shortening a remapped clip keeps the part of the curve inside. Lengthening it holds the edge frame.
- **Sound.** The clip's sound follows the curve: backwards where the picture runs backwards, silent during a freeze. The preview plays it the same way.

## Motion blur, Posterize Time, Echo (2.500.0)

A layer's Properties now has a **Time** section.

- **Motion blur** blurs the layer's movement (its position, scale and turn, from keys, a parent or an expression).
  - **shutter** is how much of each frame the blur covers: 180° is half a frame, 360° the whole frame.
  - **samples** is how many times a frame the movement is drawn. More samples give a smoother blur but compile more slowly.
- **Posterize time** holds the layer at a lower frame rate (for example 8 fps) for a jerky, stop-motion look. Both its picture and its movement are held.
- **Echo** draws copies of the layer where it was a moment ago, behind it, as a motion trail.
  - **copies** and **apart** (seconds between copies).
  - **first**: the nearest copy's strength. **fade**: how much each further copy keeps.
  - On a video layer the compile also shows the earlier frames in the copies; the canvas draws the current frame there.

**The compile.** Picture and text layers are baked by the page. On video layers the compile does the same sums:

- Motion blur: the movement sampled several times a frame and averaged.
- Posterize: the held frames.
- Echo: delayed copies laid behind the layer.

## Tracking and corner pin (2.499.0)

**Track (a video clip's Properties: V1 or a video layer).** Pick what to follow:

- ◎ **a point**: position.
- ◎◎ **two points**: position, scale and rotation.
- ▢ **corner pin**: 4 points followed separately.
- ▣ **planar**: a flat surface such as a screen, a sign or a page. Its 4 corners are carried by everything inside it, so it holds even when a corner is covered.

**Tracking**

1. Move the playhead to where the tracking should start.
2. Press ◎ **Place**, then drag the point(s) onto clear details. The square around each point is the patch the tracker looks for; **size** changes it.
3. Press ▶ **Track**. It follows them to the clip's end, to a fraction of a pixel, at the clip's own frame rate. The paths are drawn on the canvas, and any frames where a point wasn't found well are listed.

**Apply to** a layer, then **Apply**:

- With a point (or two points), the layer's position keys (and scale and rotation) follow the track. Apply it to a **null** to make other layers follow by parenting them to the null.
- With a corner pin or a planar track, the layer is **pinned** into the tracked corners on every frame. This is how to stick a picture or video onto a moving screen.

▢ **Corner pin (any layer's Properties).** Draws the layer into 4 corners.

- Tick it to start with the layer's own corners, then use ✥ **Edit corners** to drag them on the canvas.
- A pin with keys (from a track) gets a key at the playhead when you drag a corner.

**The compile.** Pinned picture and text layers are baked by the page. A pinned video layer is warped by the compile itself, with its corners as keys. Both match the canvas.

## Bézier masks (2.498.0)

Any picture, text, shape or video layer on the timeline can have **masks**: shapes that say which part of the layer shows.

**Drawing a mask with ✒ Mask Pen (Shift+M, in the canvas's tool column)**

- Pick the layer first (Move tool).
- **Click** to add a corner point. **Drag** to add a smooth point; the drag pulls out its handles.
- Click the **first point** again, or press **Enter**, to close the mask. **Esc** stops drawing.
- To change a closed mask, drag its points or their handles with the Mask Pen. **Alt** moves one handle on its own.
- The points are stored as positions on the layer's own picture, so the mask travels with the layer when it moves, scales or turns.

✒ **Masks (the layer's Properties)**

Each mask has:

- **on** / **off** and **invert**.
- **mode**: how it meets the masks above it in the list.
  - **add** shows more of the layer.
  - **subtract** cuts away.

  - **intersect** keeps only where they overlap.
  - **difference** keeps where exactly one of them is.
- **feather** (px): a soft edge.
- **expansion** (px): + grows the mask, − shrinks it.
- **opacity** (%).
- ◇: keys the mask's path at the playhead. With two or more keys the points glide from one shape to the next; dragging a point at another time adds a key there.
- × deletes the mask.

**The compile**

- Masked picture, text and shape layers are baked by the page.
- A video layer's masks become a grey mask video that the compile uses as the clip's transparency. It is a single frame when nothing in the mask moves.
- In both cases the movie matches the canvas.

## Expressions (2.497.0)

A canvas layer's Properties now has a **ƒx Expressions** section. An expression is a small formula that works out a property's value on every frame.

**Adding one**

1. Pick a property: position x / y, scale (1 = the layer's size), rotation (°), opacity (0–1), or the anchor point. A shape layer also lists its shape numbers, and a text layer lists its animator and on-a-path numbers.
2. Pick a preset or keep the first one, then press **ƒx**.
3. Edit the expression in its box. A mistake is shown straight away; until it is fixed, the property keeps the last good expression (or what its keys say).
4. × takes the expression off.

**The language** (not JavaScript; nothing else can run)

- **Sums:** numbers, + − × ÷ (`* /`), `%`, `**`, brackets, comparisons, `&& || !`, and `a ? b : c`.
- **Several lines:** separate them with new lines or `;`, and use `var name = …` for a named value. The last line is the answer.
- **Values you can use:**
  - `value`: what the keys or the setting say now.
  - `time`: seconds on the timeline. `t`: seconds into the clip. `frame` and `fps`.
  - `inPoint` / `outPoint`, `width` / `height` of the picture, `index`, and `PI`.
- **Functions:**
  - `wiggle(freq, amount)`: smooth random motion, the same every time you play.
  - `loopOut()` / `loopIn()` with `"cycle"`, `"pingpong"`, `"offset"` or `"continue"`: repeat the keys after the last key, or before the first.
  - `valueAtTime(time - 0.5)`: the value at another moment (a delay).
  - `linear` / `ease` / `easeIn` / `easeOut(t, tMin, tMax, from, to)`: map one range onto another.
  - `clamp`, `random(min, max)` (new each frame), `noise(x)`, `posterize(value, step)`.
  - `layer("Null 1", "x")`: another layer's x, y, scale, rot or op. This links layers together.
  - The usual maths: `sin cos tan abs min max round floor ceil sqrt pow …`. `Math.sin` works too.
- **Examples:**
  - `time * 90` turns 90° a second.
  - `wiggle(2, 20)` shakes 20 px.
  - `loopOut("pingpong")` plays the keys there and back for ever.
  - `layer("Null 1", "x") + 100` follows the null, 100 px to its right.

**The compile:** a layer that an expression moves or fades reaches ⚙ Compile as keys. They are worked out every frame and thinned to where the motion bends. Shape layers and animated text are baked by the page as before, so the movie follows the canvas.

## Freehand shapes, Merge Paths, text on a path, roving keyframes (2.496.0)

✎ **Freehand (Shift+Q, in the canvas's tool column).**

- Drag to draw a path. It becomes a **freehand shape layer**, thinned and smoothed.
- Ending where you began (or holding Shift) makes a closed, filled shape. Otherwise it is an open line with a 4 px stroke.
- **W** / **H** stretch it, and every shape operator works on it. On an open line, Trim Paths runs from one end to the other.
- **Alt** while drawing adds the drawing to the picked shape layer as another path.

**Paths and ⊕ Merge Paths (a shape layer's Properties).**

- **Path** adds another rectangle, ellipse, star or polygon to the same shape layer, with its own size, place and turn.
- Without Merge Paths, each path is filled on its own.
- With ⊕ **Merge Paths** on, the paths become one outline. Each extra path meets the ones before it by its mode: **add**, **subtract**, **intersect** or **exclude**. A path subtracted inside another makes a hole.
- The operators after it (Offset, Zig Zag, Trim and so on) work on the merged outline. Offset grows the outline and shrinks the holes.

**Text on a path (a text layer's Text Animators section).**

- Tick **On a path** and choose **an arc**, **a circle**, **a wave** or **a shape layer** (its outline, at the text's place).
- Set the radius, span, height or wavelength. **Start %** says where the text begins along the path; key it with ◇ to slide the text along.
- **Other way** runs the text the opposite direction (inside a circle).
- Animators still work: their x moves letters along the path, and y moves them across it.
- The compile bakes the text so it matches the canvas.

**Roving keyframes ( Graph Editor ▸ Rove).**

- Pick a position key in the Graph Editor and press **Rove**. Its time then follows the motion path, so the layer moves at an even speed between the keys around it that don't rove.
- Moving a key re-times the roving ones. The first and last position keys never rove.
- Anything else a roving key sets (scale, opacity) stays at its old time.

## Colour blend modes, and video layers that follow a parent (2.495.0)

**Hue, Saturation, Color and Luminosity.** A timeline layer's ◐ **Blend** list now has the four colour modes as well as the other 13. Each one splits a picture into its brightness and its colour, then takes one from the layer and the other from what is under it:

- **Luminosity:** the layer's brightness on the colours underneath (for example, a black-and-white texture that shades a scene without changing its colours).
- **Color:** the layer's colour on the brightness underneath (tinting or recolouring).
- **Hue:** the layer's colour family, at the strength and brightness of what is underneath.
- **Saturation:** how strong the colour underneath is becomes the layer's (a grey layer takes the colour out).

The canvas and the ⚙ Compile work these out with the same sums, so the movie matches the preview.

**Video layers can follow a parent. Parent** in a video layer's Properties now works like it does for picture, text and null layers:

- The video moves, turns and scales with its parent. Choosing the parent keeps the video where it is at the playhead.
- When you compile, the video's on-screen position, scale and rotation go into the movie as keyframes. They are checked every frame and only kept where the motion bends, so the movie follows the canvas.

## The CAD workings refined: the CAD button, Offset, the view cube, picking profiles (2.494.0)

**The CAD button.** The image editor's tool column has a CAD button at its foot, and the timeline's tool column has one too.

- **Image editor:** the CAD toolbar (Sketch · Shapes · Solid · Unreal) shows by itself while a sketch layer, a sketch tool or a 3D body is picked. The rest of the time it stays out of the way. Press CAD (or Window ▸ CAD Toolbar) to keep it on.
- **Timeline:** CAD shows or hides the toolbar over the preview.

**Sketching**

- **Select** leads the Sketch tab (S).
- **Create Sketch** hides while a sketch is being edited. It comes back once you finish.
- **Finish Sketch** picks the Move tool and moves the toolbar on to the **Solid** tab, ready to extrude.
- **Draw on from a line:** pick one line (or arc) with Select. A appears beyond each of its ends. Click one and the Line tool carries on from that end; click the next points as usual.

**Offset (O) is now a tool**

1. Click a line, arc or circle. Everything joined to it end to end comes too; Shift-click adds more.
2. Move the pointer to the side you want. A dashed preview follows it and the Distance box shows how far.
3. Click to make it, or type the distance and press Enter.

- **F** (or ⇄ Flip) uses the other side.
- **Esc** drops the pick.
- Lines drawn in any direction now offset to the same side, and a rounded corner stays joined (its arc grows or shrinks with the rest).
- The Offset… dialog in the Sketch tab still works on what is picked. It now says **Out** or **In**.
- An offset (or any sketch edit) that the sketch cannot take changes nothing.

**Extrude and Revolve: pick the profile**

- When the sketch has more than one closed region, Extrude / Revolve first asks you to click the regions to use:
  - Each region lights up under the pointer. Click to add it, click again to drop it, or use **All**.
  - Then **Enter** or ✓ **OK** opens the settings with those regions ticked. **Esc** stops.
- A sketch with one region goes straight to the settings.
- If you already picked a region's lines with Select, it is used as it is.

**The 3D viewport (a body picked)**

- **Shift + middle-drag** orbits the body, with any tool. **Middle-drag** pans and the **wheel** zooms, as before.
- **The view cube** sits at the top right of the canvas:

  - Click a face for that view, or a corner for the view from that corner.
  - Drag the cube to orbit.
  - Under it: ⌂ **Home**, **Orbit** (drag the body itself), **Pan** and **Fit**.
- A 3D view layer orbits with Shift + middle-drag too. With on, middle-drag pans its camera.

## Text animators (2.493.0)

A text layer's Properties panel has a **Text Animators** section. Animators move, turn, scale, fade, space out, blur or recolour the letters one by one, so a line can type itself, rise into place or ripple.

- **Animator** adds one. Pick a preset first if you like; each preset comes with its keyframes already set:
  - **Typewriter**: letters appear one after another.
  - **Fade up**: letters rise and fade in.
  - **Pop in**: letters grow from nothing.
  - **Slide in (words)**: words slide in from the left.
  - **Wave**: a ripple runs through the line.
  - **Blur in**: letters come into focus.
  - **Custom**: an empty animator to set up yourself.
- **What it changes:** x and y (px), scale (%), rotation (°), opacity (%), tracking (extra space, px), blur (px), and optionally a colour.
- **Which letters it changes (the range):**
  - **start**, **end** and **offset** (%) set the part of the text the animator affects. **amount** (%) sets how strongly.
  - It can work by **letters**, **words** or **lines**.
  - The shape sets how the effect is spread across the range:
  - **square**: on or off, with the edge letter partly in, so a typewriter runs smoothly.
  - **ramp up** / **ramp down**: a gradual build or fade across the range.
  - **triangle** / **round** / **smooth**: strongest in the middle of the range.
- **Animating:** every number has a ◇ that keys it at the playhead. Keying the offset from −(the range) to 100 % sweeps the effect through the text. The Graph Editor lists these keys too.
- Several animators can work on one text: their moves add up, and their scales and opacities multiply.
- ✕ takes an animator out, along with its keys.
- **The compile:** before ⚙ Compile, a text layer with animators is baked by the page, so the movie shows exactly what the canvas showed.
- Animators work on plain text layers. A text with a text-effect preset keeps its preset.

## Shape layers and their operators (2.492.0)

- ◆ **Shape tool** (Q, in the canvas toolbar): drag a box on the canvas to make a shape layer that size and in that place. Hold Shift for even sides. Afterwards the tool goes back to Move.
- A shape layer's Properties panel has these settings:
  - **The kind:** Rectangle (with a corner radius), Ellipse, Star (points, inner radius) or Polygon (points). Each has a width and height.
  - **Fill:** a colour, or a two-colour gradient, with its opacity.
  - **Stroke:** a colour, a width, and round, flat or square ends.
  - **The operators.** Tick one to turn it on and show its settings:
  - ✂ **Trim Paths**: start, end and offset (%). Only that part of the outline is drawn. Key the end from 0 to 100 % to draw a shape on.

  - **Repeater**: copies and an offset; each copy is moved (x, y), scaled (%) and turned (°) a step further. Opacity fades from a start value to an end value.
  - ⇲ **Offset Paths** grows the outline out, or in with a negative value.
  - ✳ **Pucker & Bloat** pulls the edges in or pushes them out.
  - **Twist** turns the outside more than the middle.
  - **Zig Zag** adds ridges, sharp or smooth.
  - ≈ **Wiggle Paths** makes the outline wobble, moving over time.
  - ◜ **Round Corners** rounds every corner.
- **Animating:** every number has a ◇ beside it, which keys that number at the playhead. Once a number is keyed, changing it keys it again at the playhead, the same as position. The Graph Editor lists the keyed shape numbers, so you can shape their eases.
- **The compile:** before ⚙ Compile, the page bakes each shape layer, frame by frame, exactly as the canvas draws it. An unchanged shape is not baked again.

## Blend modes and track mattes (2.491.0)

Select a clip on a video or picture layer. The Properties panel has two new settings, which apply to the clip's whole **layer**:

- ◐ **Blend** sets how the layer mixes with what is under it: Normal, Multiply, Screen, Overlay, Darken, Lighten, Color Dodge, Color Burn, Hard Light, Soft Light, Difference, Exclusion or Add.
  - For example, Screen a light-leak video over a shot, or Multiply a paper texture over it.
- ▣ **Matte** shows the layer only where the layer **right above it** is (the matte layer is named beside the menu):
  - **Alpha**: where the matte layer has picture (its transparency).
  - **Alpha Inverted**: where it has none.
  - **Luma**: where it is bright.
  - **Luma Inverted**: where it is dark.
- The matte layer itself is no longer drawn. It still works as the matte even when it is hidden.
  - For example, put a text layer above a video layer and give the video layer an Alpha matte: the video plays inside the letters.
- The canvas shows both while you edit. Playback uses the drawing path for these layers.
- The compile draws the same picture.

## Parenting and null objects (2.490.0)

- **Parent** (in the Properties of a picture, text or null layer) makes the layer follow another layer.
  - The child moves, turns and scales with its parent. It does not take on the parent's opacity.
  - Choosing a parent keeps the layer exactly where it is on screen: its position, rotation and scale (and its keyframes) are converted into the parent's space.
  - Choosing **none** does the same in reverse.
  - Chains work: a parent can have its own parent. A layer can never follow itself or one of its own children.
  - Video layers can be parents, but cannot follow one.
- **Null** adds an empty control layer, as long as the timeline.
  - It has no picture and is never compiled. The canvas shows it as a red dashed square with a cross.
  - Key the null (position, rotation, scale), then parent layers to it to move them all together.
- Dragging a parented layer on the canvas moves it the way you drag, whatever its parent is doing.
- **The compile:** before ⚙ Compile, each parented layer is baked. The page draws its frames exactly as the canvas shows them and saves them as a transparent video in the project

(video/tlb_….webm), which the compile overlays. A layer that has not changed since its last bake is not baked again.

## The Graph Editor, Easy Ease, the anchor point and curved motion paths (2.489.0)

Select a picture, text or video layer on the timeline's canvas. Its Properties panel now has these extras:

- ⊕ **Anchor X / Y**: the point the layer's position places, and that scale and rotation pivot on. It is measured in pixels from the layer's centre. Changing it keeps the layer where it is, because its position moves to match. If position is keyframed, the layer moves instead. The anchor can be keyframed too (in the Graph Editor, double-click the Anchor X or Anchor Y graph).
- **Easy Ease** (F9) eases the keyframe at the playhead in and out, so the layer slows into and out of it. **Ease In** and **Ease Out** (Shift+F9 / Ctrl+Shift+F9) do one side only.
- **Graph** opens the **Graph Editor**, a panel you can drag anywhere:
  - – Pick a property: Position X / Y, Scale, Rotation, Opacity or Anchor X / Y. Keyed ones are marked ◆.
  - – **value** shows the property over the clip's time; **speed** shows how fast it changes.
  - – Drag a ■ keyframe to change its time and value. Click one to select it.
  - – The selected keyframe's tween shows two ● handles. Drag them to shape the curve: a slow start, a fast finish, or even an overshoot. **Easy Ease**, **Linear** and **Hold** set the selected tween in one click.
  - – Double-click the graph to add a keyframe there. Delete removes the selected one. F9 Easy Eases it.
- ↝ **Smooth path** gives every position keyframe smooth handles, so the layer travels along a curve through them.
  - – The **motion path** shows on the canvas as a dotted line with a ■ at each keyframe.
  - – Drag a ■ to move that keyframe. Alt-drag a ■ to pull out its handles.
  - – Drag a ● handle to bend the path. Alt-drag a handle to bend one side only.
- The keyframe ease menu has a new **Bézier ( graph)** entry.
- The compile draws the same curves, anchors and paths that the canvas shows.

## PDF pages added, taken out and moved; Select Subject without a download - round H (2.488.0)

**PDF pages.** When a PDF is open, the Pages strip has a row of buttons under the pages. They act on the page that is open.

- **Page** adds a blank page, the same size as the open one, right after it.
- **PDF…** adds all the pages of another PDF right after the open one.
- ▲ / ▼ move the open page up or down. You can also drag a page in the strip to a new place.
- takes the open page out, and the page before or after it opens instead. If the page has changes, you are asked first.
- The same commands are under File ▸ Add / Remove PDF Pages.
- **Save PDF** writes the pages in their new order. Pages you didn't change are copied across as they were (text, vector shapes and all). Changed and new pages are saved as their picture plus real text.

**Select ▸ Subject** selects the picture's main subject in one step, with nothing to type.

- **Built in** works straight away, with no download. It learns the background from the picture's edges and the subject from what differs, then fits the selection to the real edges. It works best on a clear subject against a plainer background, and still works for subjects that stand on the bottom edge, like portraits.
- **AI matte** uses BiRefNet on this computer, the same install as the path layers' AI matte (about 1 GB, once). It handles hair, fur and busy backgrounds better.
- **Select ▸ Subject Settings…** picks the method: **Auto** (the AI matte when it is installed, built in otherwise), **Built in** or **AI matte**. It also picks the AI model and has **⬇ Install**.
- **Layer ▸ Remove Background** does the same thing but puts the subject into the active layer's mask, so the background is hidden, not deleted. Paint on the mask to fix any edges.
- Select Subject and Remove Background are each one undo step.
- Selecting by words (Segment Anything) is now **Select ▸ Subject by Words…**.

## Image ▸ Mode, Proof Colors, Gamut Warning, CMYK TIFF - round G (2.487.0)

**Image ▸ Mode** sets what kind of picture the document is. Each mode change is one undo step, and the mode is saved in the document's .bgi file.

- **Grayscale**: every pixel layer turns grey. Anything you paint afterwards shows grey too, on screen and when exported.
- **Duotone…**: a grey picture printed with one to four inks (monotone, duotone, tritone, quadtone).
  - Pick each ink's colour. Its curve slider gives that ink more (right) or less (left) of the midtones.
  - Presets: Sepia, Blue duotone, Cyanotype, Gold tritone, Warm quadtone and Black.
  - The layers hold the grey picture, so you can change the inks later.
- **Indexed Color…**: at most 256 colours. The layers are flattened into one **Index** layer.
  - Palette: Local (made from the picture), Web (216), Uniform, Grey, or Black and white.
  - Dither (diffusion or pattern) with an amount; keep transparency or put the picture on white.
  - **Color Table…** shows the colours. Click one to change it everywhere it is used, or save and load .act colour tables.
- **Bitmap…**: black and white only. The picture is flattened onto white with a 50 % threshold, pattern dither, diffusion dither or a halftone screen (cell size and angle).
- **CMYK Color…**: colours are limited to what a printing press can reproduce.
  - Choose coated, uncoated or newsprint paper, black generation (none to maximum) and the total ink limit.
  - Colours the press cannot print, like bright screen greens and blues, move to the nearest colour it can.
  - **File ▸ Export As ▸ TIFF (CMYK, for print)** writes the four inks for a print shop. The Info panel's C M Y K readout uses the same model.
- **RGB Color** goes back to full colour. The look of the mode you leave is kept in the pixels.
- **8 Bits/Channel** is the only depth here, because the browser's canvas holds 8 bits per channel. There are no 16- or 32-bit documents.

**View ▸ Proof Setup…** picks the press to simulate (paper, black generation, total ink), whether to simulate the paper colour, and the gamut warning's limit and colour. These only change what you see on screen:

- **View ▸ Proof Colors** (Alt+Ctrl+Y) shows the picture as that press would print it.
- **View ▸ Gamut Warning** (Shift+Ctrl+Y) paints the colours the press cannot print in the warning colour (grey by default). In the Info panel, a "!" after the C M Y K values means the same.
- The press is a simple simulation of process inks on paper, not an ICC colour profile. Use it to spot trouble, and use your print shop's proof for exact colour.

## Auto-Align Layers, Auto-Blend Layers, Photomerge, Merge to HDR - round F, part 2 (2.486.0)

These four work out how pictures fit together by themselves. They find small details (corners) in each picture, match them between pictures, and work out the move, turn, scale or perspective that lines them up. Pictures need some detail in common. Plain sky or a blank wall gives them nothing to match.

- **Edit ▸ Auto-Align Layers…** lines up the layers you have picked (Ctrl-click in Layers), or every visible pixel layer if you haven't picked any.
  - **Layout**: Auto or Perspective (move, turn, scale and perspective), Move, turn and scale, or Reposition (move only).
  - **Line up on**: the middle layer, the active layer or the bottom layer. That layer stays put.
  - Layers that cannot be matched stay where they are, and the status line says how many there were. It is one undo step.
- **Edit ▸ Auto-Blend Layers…** gives each layer a mask showing where it is used. You can paint on the masks afterwards.
  - **Panorama**: each spot comes from the layer it is deepest inside, with soft seams. **Seamless tones and colours** evens out brightness and colour between the pictures.
  - **Stack Images**: each spot comes from the layer that is sharpest there. Use it for focus stacking (the same shot taken several times, each focused at a different distance). Align the layers first.
- **File ▸ Automate ▸ Photomerge…** stitches a panorama. Choose files, or use the open documents.
  - The pictures should overlap by about a third.
  - The result is a new **Panorama** document with one layer per picture, placed and (with **Blend the pictures together**) masked.
  - Pictures that overlap nothing are left out, and the status line says so.
  - Very wide results are scaled to fit 8000 pixels.
- **File ▸ Automate ▸ Merge to HDR…** takes bracketed exposures (the same scene shot dark, normal and bright) and fuses them into one well-exposed picture.
  - Each spot takes most from the exposure where it is clearest: good contrast, good colour, neither too dark nor too bright.
  - With **Line the pictures up first**, slight camera movement between shots is corrected.
  - The result is an ordinary 8-bit picture, not a 32-bit HDR file.

## More file types, File Info, Print, Contact Sheet, Crop and Straighten Photos - round F (2.485.0)

- **File ▸ Export As** now also writes **AVIF**, **GIF**, **TIFF**, **BMP** and **TGA**, next to PNG, JPEG, WebP and JPEG XL.
  - GIF keeps up to 256 colours (dithered, so gradients stay smooth) and a clear colour for transparent areas.
  - TIFF, BMP and TGA keep every pixel and the transparency. The preview shows the picture for TIFF and TGA, since a browser cannot show those files itself.
  - AVIF is made by ffmpeg on this computer (it needs an AV1 encoder: libaom-av1, libsvtav1 or librav1e) and has a quality slider. AVIF files are saved without transparency.
- **File ▸ File Info…** (Alt+Shift+Ctrl+I): title, author, description, keywords, copyright and a source URL. It is kept with the document (and in its .bgi file) and written into exported PNG files (as text chunks) and JPEG files (as XMP), so other programs show it.
- **File ▸ Print…** (Ctrl+P): scale to fit the page, a size in cm or inches, or a percentage; portrait, landscape or as the picture. OK opens the system's print dialog, where you pick the printer, the paper and copies, or save as PDF.
- **File ▸ Automate ▸ Contact Sheet…**: puts pictures in a grid on a new document. Choose files, or use the open documents; pick the page (A4, Letter or 1920 x 1080), columns and rows, the margin

and captions with the file names. Each picture is its own layer; more pictures than fit start a new page.

- **File ▸ Automate ▸ Crop and Straighten Photos**: for a scan with several photos on it. Each photo is found against the plain page colour, turned straight and opened as a document of its own (named "<scan> photo 1", "photo 2", ...).

## Brush Settings, brush presets and .abr brushes - round E (2.484.0)

The **Brush** tab (the Properties group; also Window ▸ Brush Settings) is where you set up the brush the Brush, Pencil and Eraser tools paint with.

- **The presets** at the top: the 20 that come with bitGen, yours, and the ones you have imported. Click one to use it.
  - **Import .abr...** brings in the sampled brushes from a brush file (.abr versions 1, 2, 6, 7 and 10). Each becomes a preset that paints its picture.
  - **New Brush Preset...** keeps the current brush, with all its settings, under a name. Your presets live in **brushes/<name>.json** in the install folder; copy them to share them.
  - **Delete** removes one of yours; ↺ **Reset** puts a built-in preset back as it came.
- **Brush Tip Shape**: Angle, Roundness (a flat, calligraphic tip), Hardness, Spacing, Flip X / Y.
- **Shape Dynamics** (tick the section to turn it on): Size jitter + minimum diameter; Size control (off, pen pressure, or fade over N steps); Angle jitter + Angle control (off, the stroke's direction, pen pressure); Roundness jitter + minimum; Flip X / Y jitter.
- **Scattering**: Scatter (% of the size, across the stroke or both axes), Count, Count jitter.
- **Texture**: Noise, Canvas, Paper, or any pattern of the pattern library. Scale, Depth, Multiply / Subtract, Invert. The texture stays fixed to the picture.
- **Dual Brush**: a second tip (any preset) cuts into the first, with its size, scatter and count.
- **Color Dynamics**: Foreground / background jitter; hue, saturation and brightness jitter; Purity; per tip or once per stroke.
- **Transfer**: Opacity jitter, Flow jitter, Control by pen pressure.
- **Smoothing** (0-95 %): the brush follows the pointer on a string, for steadier lines.
- Each preset keeps its own settings: the built-in ones in the editor's settings on this computer, yours inside their file.

## Navigator, Histogram, Info, measuring tools, Grow / Similar / Focus Area, Matting - round D (2.483.0)

- **Panels** (the Color group's tabs, and the Window menu):
  - **Navigator**: the whole picture small, with the view as a red box. Click or drag on it to move the view; the slider zooms.
  - **Histogram**: RGB, Luminosity, Red, Green, Blue or Colors, of the entire picture or the selected layer (inside the selection when there is one). It shows the Mean, Std dev, Median and Pixels, plus the level, count and percentile under the pointer.
  - **Info**: under the pointer, the RGB, HSB and CMYK values and the X, Y position. It also shows the document's size, the selection's size and place, the ruler's length and angle, and each colour sampler's colour.
  - **Notes**: every note on the picture; goes to it, ✕ deletes it, and a double-click edits it.
- **Tools** in the Eyedropper's group (**I**, Shift+I cycles):
  - **Color Sampler**: click to place up to 10 samplers and drag one to move it; Alt-click removes it. The Info panel reads them, and Sample size can be a point, 3 by 3 or 5 by 5.
  - **Ruler**: drag to measure (Shift = 45° steps). ↻ **Straighten Layer** turns the active layer so the line is level (or upright); ↻ **Straighten Picture** turns every layer.

  - **Note**: click to pin a note (with its author); click it to edit it, Alt-click to delete it.
  - **Count**: click to drop numbered markers in coloured count groups ( Group, colour, size). The options bar shows the count; Alt-click removes the nearest marker.
- **Perspective Crop** (in the Crop tool's group, **C**): drag a box, move its four corners onto the edges of what should end up square (a sign, a document, a building's front), then press **Enter**. The whole picture is cropped and squared, every layer with it. One undo step.
- **Select ▸ Grow** (to touching pixels within the Magic Wand's tolerance), **Similar** (every pixel like the selected ones), **Focus Area…** (the sharp parts: In-focus range + Softness, previewed live), **Transform Selection…** (move, scale and rotate the selection itself).
- **Layer ▸ Matting**: **Defringe…** (edge pixels take the colour of the solid ones next to them), **Remove Black Matte**, **Remove White Matte**.
- Samplers, notes and count markers belong to each document and are kept in its .bgi.

## The Develop Filter and Lens Correction - the image editor's gap, round C (2.482.0)

- **Filter ▸ Develop Filter…** (**Alt+Shift+Ctrl+A**) is a photo developer in one dialog. It previews live, works inside the selection, is one undo step, and becomes a smart filter on a smart object. Its tabs:
  - **Basic**: Temperature, Tint, Exposure, Contrast, Highlights, Shadows, Whites, Blacks, Texture, Clarity, Dehaze, Vibrance, Saturation; **Black & White**; **Auto** sets exposure, contrast, whites and blacks from the picture.
  - **Curve**: Highlights / Lights / Darks / Shadows sliders and a point curve (RGB, Red, Green, Blue).
  - **Color**: the colour mixer: pick Red, Orange, Yellow, Green, Aqua, Blue, Purple or Magenta and change its Hue (±30°), Saturation and Luminance. In Black & White, Luminance sets how light each colour turns.
  - **Grading**: tint the Shadows, Midtones and Highlights (hue, saturation, luminance); Blending and Balance.
  - **Detail**: Sharpening (amount, radius, detail, masking: 0 = everywhere, more = only the edges), Noise reduction, Color noise reduction.
  - **Optics**: Distortion, Vignetting (+ midpoint), Defringe purple / green.
  - **Geometry**: Vertical / Horizontal perspective, Rotate, Scale, X / Y offset.
  - **Effects**: Grain (amount, size, roughness) and a vignette after the crop (amount, midpoint, roundness, feather).
  - **Presets**: Vivid, Matte, Warm film, Cool night, Portrait soft, Landscape punch, Black & White, Teal & orange. **Save as preset** keeps your own (they stay in the editor's settings), and **↺ Reset all** clears everything.
- **Filter ▸ Lens Correction…** (**Alt+Shift+Ctrl+R**): Remove distortion (barrel / pincushion), Fix red / cyan and blue / yellow fringes, Vignette (amount, midpoint), Vertical / Horizontal perspective, Angle, Scale, and what fills the **Edge** (edge extension, transparent, a colour). A **grid** over the picture while it is open helps straighten.

## 44 more filters - the image editor's gap, round B (2.481.0)

The **Filter** menu now has twelve submenus: Artistic, Blur, Blur Gallery, Distort, Noise, Other, Pixelate, Render, Sharpen, Sketch, Stylize and Texture. Every filter previews live, works inside the selection, is one undo step, can be repeated with **Ctrl+F**, recorded in an action, and becomes a **smart filter** on a smart object.

- **Blur**: **Surface Blur** (smooths while keeping edges: Radius + Threshold), **Smart Blur** (Normal / Edge Only / Overlay Edge), **Average**, **Lens Blur** (depth from transparency or brightness, a focal distance, the iris shape (circle, 3-8 blades), blade rotation, specular highlights for bokeh, noise).

- **Blur Gallery**: **Field Blur** (two or three pins, each with its own blur), **Iris Blur** (an ellipse that stays sharp and fades out; **click the picture to put its centre**), **Path Blur** (motion along a curve: start, bend, end, speed, taper), **Spin Blur** (round an ellipse by an angle; click to place).
- **Noise**: **Reduce Noise** (strength, preserve details, colour noise, sharpen details), **Dust & Scratches** (radius + threshold), **Despeckle**.
- **Sharpen**: **Smart Sharpen** (amount, radius, reduce noise; remove Gaussian, Lens or Motion blur at an angle; fade the sharpening in the shadows / highlights).
- **Other**: **High Pass**, **Minimum**, **Maximum** (square or round), **Offset** (wrap around / repeat the edge / see-through), **Custom** (your own 5 x 5 kernel with presets, a scale and an offset), **HSB / HSL**.
- **Distort**: **Displace** (a map from a layer or the merged picture: red moves pixels across, green up and down), **Polar Coordinates** (both ways), **Pinch**, **ZigZag**, **Shear** (bend through top / middle / bottom), **Glass** (frosted, blocks, canvas, tiny lens).
- **Pixelate**: **Color Halftone** (C / M / Y / K dot screens at their angles), **Crystallize**, **Pointillize**, **Facet**, **Fragment**, **Mezzotint** (dots, lines, strokes).
- **Render**: **Lighting Effects** (spot, point or infinite light; colour, intensity, where it is and where it aims, cone + hotspot, ambience, gloss; a height texture from the brightness or the transparency), **Fibers**, **Difference Clouds**.
- **Stylize**: **Diffuse** (normal, darken only, lighten only, anisotropic), **Tiles**, **Trace Contour**.
- **Artistic**: **Cutout**, **Poster Edges**, **Watercolor**, **Dry Brush**. **Sketch**: **Graphic Pen**, **Charcoal**. **Texture**: **Grain** (7 kinds), **Craquelure**.

## More adjustments and Apply Image - the image editor's gap, round A (2.480.0)

New in **Image ▸ Adjustments**. Each one previews live, works inside the selection, is one undo step, and can be repeated with Ctrl+F, used as a smart filter or recorded in an action:

- **Shadows / Highlights**: lifts the shadows and pulls back the highlights *locally*. **Amount** sets how much, **Tone** sets how far into the midtones it reaches, and **Radius** sets the size of the neighbourhood it looks at. **Color correction** restores the colour in the areas it changed, and **Midtone contrast** works in between.
- **HDR Toning**: the "HDR look" on one picture. **Edge glow** (radius + strength) evens the light across the picture, then **Gamma**, **Exposure**, **Detail**, **Vibrance** and **Saturation** finish it.
- **Selective Color**: pick a range (**Reds, Yellows, Greens, Cyans, Blues, Magentas, Whites, Neutrals, Blacks**) and add or take away **Cyan, Magenta, Yellow and Black** in it. **Relative** changes the ink in proportion to what is there; **Absolute** adds the amount itself.
- **Replace Color**: **click the picture** to pick the colour (or set it), set **Fuzziness** for how alike a colour must be, then shift its **Hue / Saturation / Lightness**.
- **Match Color**: give the layer the colour of another: **Source** = another layer, the merged picture or a picture file (…). Then set **Luminance**, **Color intensity**, **Fade**, and **Neutralize** to take a colour cast out.
- **Color Lookup**: a 3D LUT. Pick one of the timeline's **looks** or a **.cube** from the LUT library (shared with the timeline's Colour panel); **.cube…** adds your own. **Amount** mixes it.
- **Image ▸ Apply Image…**: blends another layer (or the merged picture), or one of its channels (RGB, Red, Green, Blue, alpha, luminosity), inverted or not, onto the layer. There are 11 blend modes, plus Opacity and Preserve transparency.
- **Adjustment layers**: **Selective Color** and **Color Lookup** are new (Layer ▸ New Adjustment Layer, the Adjustments panel); you edit them in Properties.

## JPEG XL (.jxl) pictures (2.479.0)

- **Open** a .jxl in the image editor like any picture: File ▸ Open, drop it on the canvas, Place, or open it from the project. Its pixels come in exactly as they are (8 bits per channel, sRGB; the first frame of an animated one).
- **Export As ▸ Format: JPEG XL**: **Quality** (1-100), or **Lossless** (every pixel kept exactly, and usually much smaller than PNG). Download, or **Save to Images**, which keeps it as a .jxl in the project's pictures.
- **The rest of the app**: .jxl pictures show in the Assets docker, the gallery, the media viewer, the file dialog's previews and on the timeline. The browser cannot show JPEG XL itself, so the studio sends a PNG of the picture to whatever displays it. Anything that reads the file itself gets the .jxl.
- **Generating and compiling**: a .jxl used as a reference is sent to ComfyUI as a PNG (ComfyUI cannot read JPEG XL). A .jxl still on the timeline is compiled from its PNG. A .jxl uploaded anywhere other than the project's pictures arrives as a PNG.
- Everything runs on this computer: the codecs (jxl-oxide to read, libjxl to write) are in static/vendor/jxl/.

## Search in every dropdown list (2.478.0)

- Every **dropdown list with 8 or more items** - in the dockers, the image editor, the timeline, Settings and every dialog - opens with a **search box** on top, like the node search:
  - **type** and the list narrows as you type, best matches first: the start of a word, then anywhere, then the letters in order ("flx2" finds "FLUX.2 [dev]"). The matched letters are lit, and a group's name finds its items. "12 of 340" shows how many are left.
  - ↑ ↓, **PgUp** / **PgDn** (Ctrl+Home / Ctrl+End for the first / last) move the lit row; **Enter** or a **click** picks it; **Tab** picks the lit row and moves on; **Esc** or a click outside closes the list with nothing changed.
  - On a list that has the focus, **any letter** opens it already searching for that letter; **Alt+↓**, **F4**, **Space** or **Enter** open it; ↑ ↓ still step through it without opening it.
- **Settings ▸ General ▸ Dropdown lists**: "Search in lists with N or more items" (8; **0** = always the plain list). Kept in this browser.

## The public beta: the repository, what is experimental, reporting a problem (2.477.0)

- bitGen Studio is now a **public beta** with its own repository: the source, the guides, the Feature Reference PDF, the changelog (**CHANGELOG.md**, every release) and the installers on the **Releases** page.
- **docs/BETA.md** says what is solid and what is **experimental**: the Unreal Engine bridge (written for Unreal 5.8 and tested against a stand-in, not yet inside a real Unreal Editor), the Daz Studio live link, transparent Unreal renders, and macOS (MiniMax H3 video needs NVIDIA CUDA).
- **Reporting a problem**: open an issue with the **Bug report** template. Give the version (package.json, or the release you downloaded), your OS / graphics card, what you did and what happened (a screenshot or a short recording), and the Console docker's last lines. For the Unreal bridge, add the `[bitGen Bridge]` lines from Unreal's Output Log. **Never** post your custom.settings (it has your folders and tokens).
- **Updating**: download a newer release, or `git pull`, then run start.bat / misc/bitgen-studio.sh again. Your projects, settings, models and styles are not in the repository, so an update leaves them alone.
- **Contributing**: CONTRIBUTING.md has the set-up, where code goes (routes/ + lib/, each docker an extension in ext/), the tests (`bash scripts/ci-units.sh` - what GitHub runs on every push) and the docs to update.

## Unreal lights, volumetric lights and fog - in the image editor and the timeline (2.476.0)

- **Update the plugin** to **bitgen-ue-bridge-1.2.0.zip** (it places the lights and the fog).
- **Image editor ▸ UNREAL ▸ Lights & Fog** (or the **Lights** tab in Properties, Window ▸ Unreal Lights) for an Unreal or MetaHuman layer:
  - **Lights from a preset**: Three-point (key, fill, rim), Golden hour (a low warm sun + sky), Night street (a warm spot + a cool fill), Neon (magenta + cyan rect lights with volumetric fog), Studio softbox.
  - **Point** / **Spot** / **Rect** / **Sun** / **Sky**: a new light is placed for the camera - in front, up and to the side, aimed at the subject.
  - Each light: **colour** or a **temperature** in kelvin, **intensity** (candelas; lux for the sun), **reach**, **soft size, a spot's** cone**, a rect light's** size**,** Volumetric** (how strongly it lights volumetric fog - light shafts), **shadows**, its **place** (X Y Z) and **aim** (roll, pitch, yaw); ☐ switches it off, ✕ deletes it.
  - **Fog**: height fog (density, falloff, colour, where it starts) and **volumetric fog** (albedo, extinction, how far it reaches), and fog presets (light haze, morning mist, thick volumetric, cinema smoke).
  - **Keep them in the Unreal level**: otherwise bitGen's lights and fog (named bitGen_*) are only there for the picture.
  - Every change renders the layer again - **one undo step**.
- **UNREAL ▸ Lights** is the **light tool**: every light shows as a marker where it is in the picture (a spot or a rect light shows where it points). **Drag** a marker across the picture (it keeps its distance from the camera), **Shift + drag** = nearer / further, **Alt + drag** = turn its aim; Del deletes the picked light.
- **Timeline ▸ UNREAL ▸ Lights & Fog…** (an Unreal, MetaHuman or Unreal camera clip picked): the same panel, plus ⇦ **The image editor's lights** to bring the lights + fog of the image editor's layer; **Render** makes the clip again with them.

## The Unreal camera in the image editor: move it, lens, f-stop, exposure, presets (2.475.0)

- **Update the plugin**: unzip **bitgen-ue-bridge-1.1.0.zip** (or newer) over the old one in your project's Plugins folder (the camera's lens, "To Unreal's viewport" and "Click to focus" need it).
- **UNREAL ▸ Camera** (with an Unreal or MetaHuman layer picked) is the **Unreal camera tool** - drag on the picture to move the camera in the scene:
  - **drag** = **Orbit** round what it looks at (the focus distance, else 5 m), **Ctrl + drag** = **Look** (turn it where it stands: yaw / pitch), **Shift + drag** = **Pan**, **Alt + drag** = **Roll** (tilt the horizon), **the wheel** = **Dolly** forward / back, **Ctrl + wheel** = **zoom** (the focal length).
  - The modes are also buttons on the options bar (Orbit, Look, Pan, Dolly, Roll, **Focus**: click what should be sharp and Unreal measures the distance).
  - While you drag, Unreal draws small previews; when you let go it renders at full size - **one undo step**. Thirds and the focus point are drawn over the layer.
- **The Camera tab** (Properties; **Window ▸ Unreal Camera**; UNREAL ▸ Lens & Exposure):
  - **Presets**: lenses from 18 mm to 200 mm, macro, an anamorphic look - and **Save** your own.
  - **Lens**: focal length (slider + number) linked to the **field of view**, the **filmback** (full frame, Super 35, APS-C, Micro 4/3, IMAX, phone).
  - **Depth of field**: **f-stop** (f/1.2 - f/22) and the **focus** distance (0 = all sharp), **Click to focus**.
  - **Exposure** in EV (-5 … +5).
  - **Place** (X Y Z, cm) and **turn** (roll, pitch, yaw, °) as numbers; ⇩ **From Unreal's viewport**, **⇧ To Unreal's viewport **(Unreal looks through this camera),** Render**.

- **Timeline**: UNREAL ▸ Keys… of an Unreal camera now has a **Lens** row (focal length, f-stop, focus, exposure) used by its render.

## No tool, the selection box and several layers at once (2.474.0)

- **Esc** puts the tools down: no tool, nothing picked. (A tool's own Esc - ending a pen path, cancelling a crop or a polygon lasso - still comes first; with no tool and nothing picked, Esc does what it did before, e.g. leaves full screen.) A tool's letter (V, M, B…) picks a tool again.
- **With no tool**, hovering an object outlines it blue; a **click** picks it (**Shift** or **Ctrl** adds it to / takes it away from what is picked). **Drag** on the picture and a **dashed box** follows the pointer:
  - **left to right** (blue) picks every layer **wholly inside** the box,
  - **right to left** (green) picks every layer the box **touches**,
  - **Shift** keeps what was picked and adds to it. A click on nothing picks nothing.
- **Layers panel**: a click picks one layer; **Shift-click** picks every layer between the last one clicked and this one; **Ctrl-click** adds a layer or takes it away. Picked rows are lit (their numbers 1, 2, 3 are still the order Compose and → References use).
- With several layers picked, the **Move tool** moves them all together (one undo step), and **Del** deletes them all (one undo step). With a pixel selection, Del still clears the selected pixels.

## The Feature Reference PDF (2.473.0)

- **docs/bitGen-Studio-Features.pdf** lists every feature of bitGen Studio so far - about 575 of them in ten areas (the workspace, generating video, images, music and sound, the timeline, the image editor, CAD and 3D, the bridges, delivery, keys): what each does, where it is and since which version. It opens with the areas at a glance (each a link) and has bookmarks per area and sub-area.
- It is made from **docs/FEATURES.md** for every release (`python3 scripts/make_features_pdf.py`), beside the Guide (step-by-step instructions + shortcut keys) and the brochure.

## The Unreal Engine 5.8 bridge: Unreal layers, MetaHuman layers, the Unreal camera (2.472.0)

- **Install once** (2.513.0: or let bitGen do it - Load UE project in the menu bar): unzip **bitgen-ue-bridge-1.1.0.zip** (or newer) into your Unreal project's **Plugins** folder (`<Project>\Plugins\bitGenBridge`), open the project and enable the plugins it asks for (Python Editor Script Plugin, Editor Scripting Utilities, Sequencer Scripting, Movie Render Queue). The Output Log shows "[bitGen Bridge] listening". In bitGen: **Settings ▸ 3D ▸ Unreal Engine ▸ Test connection**. It works on this computer only (127.0.0.1); the port is 30020 unless you change it on both sides.
- For **clear backgrounds** (MetaHuman layers) turn on Project Settings ▸ Rendering ▸ Post Processing ▸ "Enable alpha channel support in post processing" in Unreal (the README in the zip says how; "alpha is inverted" in Settings fixes a reversed one).
- **Image editor ▸ UNREAL tab** (on the CAD toolbar, or Layer ▸ New Unreal Layer… / New MetaHuman Layer…):
  - **Unreal Layer**: a level of the open project through one of its cameras (or the level viewport as it is) at the size you choose - a picture layer you can move, scale, filter and mask.
  - **MetaHuman Layer**: a MetaHuman of the project in the pose of an animation at a time, framed **Face / Bust / Full body** and turned, on a clear background.
  - The **Unreal tab** (Properties) nudges the camera (Turn, Tilt, Dolly, Field of view) or the figure (framing, turn, pose time) and **Renders again** - one undo step. **Use Viewport** takes Unreal's viewport camera now.
- **Timeline ▸ UNREAL tab**:
  - **Unreal Layer**: a **Level Sequence** of the project (or a level through a camera / the viewport, held) rendered by Unreal's **Movie Render Queue** at the timeline's size and fps -> a video layer **UE1** at the playhead.

– **MetaHuman Layer**: a MetaHuman playing an animation, framed and turned, on a clear background -> **MH1**.

– **Unreal Camera**: your own camera - the first key from Unreal's viewport (or a camera of the level); move the viewport in Unreal, put the playhead later and press **Key**; **Keys…** edits them (time, place, turn, field of view - the camera moves straight between them); **Render Again** renders the level through it -> **UE Cam1**.

– Every clip remembers how it was made: **Render Again** makes it anew after you change the Unreal project.

## Parametric 3D bodies: Extrude, Revolve, Fillet, Chamfer, Shell, Split Body (2.471.0)

- **SOLID tab** on the CAD toolbar (and Layer ▸ Extrude… / Revolve… / Fillet… / Chamfer… / Shell… / Split Body… / Change Parameters…). Draw a closed sketch (SKETCH tab), then:

  – **Extrude**: the sketch's closed profiles (all of them - holes cut out - or the ones you tick), a distance, One side / Symmetric / Two sides, a start offset. **New Body** makes a new **body layer**; **Join / Cut / Intersect** work on a body you pick.

  – **Revolve**: round the sketch's X or Y axis or one of its lines, any angle up to 360°.

  – **Fillet** / **Chamfer** the sharp edges - all, the top or bottom ones, the vertical ones, or the ones round the faces. **Shell** hollows the body, open at the top or the bottom.

  – **Split Body**: a plane (XY / XZ / YZ at a distance); this layer keeps one side and the other side becomes a **new body layer**. Both stay parametric.
- **Parametric**: every number is a sum you can type - `25`, `depth`, `depth / 10 + 2`, `1 in`, `30 deg` (the value shows as you type). **ƒx Change Parameters** names your numbers (each may use the others); change one and every feature that uses it follows. Edit the **sketch** later and its bodies are built again by themselves.
- **The Body tab** (Properties) lists the **features** in order: ☑ switches one off (suppress), ✎ or a double-click edits it, ↑ ↓ reorder, × deletes. A feature that fails is shown in red with the reason; the rest of the body stays. Below: **View** (Home / Front / Back / Top / Bottom / Right / Left, Turn / Tilt / Roll, **Orbit**

  – drag the body on the canvas), **Look** (colour, metal, rough, edges, detail) and **Export** (STL, glTF .glb, STEP, → Timeline). Every change is one undo step.
- A body layer is a **smart object**: move, scale, rotate, warp, filters and masks all work on it.
- **Settings ▸ 3D** picks the engine: **In the browser (OpenCascade)** - exact solids, nothing to install - or **Blender (on this computer)**. Both build the same body.
- **The timeline**: SOLID ▸ **Body → 3D Layer** puts a body on the timeline as a 3D layer (turn it, light it, key it). Change the body in the image editor and its 3D layers update by themselves (**Update Bodies** does it by hand); **Edit in Image Editor** picks it there.

## Picking like a drawing program + the CAD toolbar (2.470.0)

- **Hover / picked outlines**: with the **Move** tool, the shape, smart object, text, sketch, 3D layer or picture content under the pointer shows its outline in **blue** - it can be picked. The picked one has an **orange** outline (and the Move tool's handles). The background is the canvas, not an object.
- **Click** on an object = it is picked (press and drag = picked and moved at once). **Click on empty canvas** = nothing picked (the handles go; a drag that starts there moves nothing). **Esc** = nothing picked. A click in the Layers panel picks the layer again. With a selection active (or Auto-select on) the Move tool works as before.
- **After drawing a shape** (Shape, Custom Shape, Rectangle, Ellipse, Polygon, Star, Spiral, Graph Paper, the common shapes, 2-Point Line) the **Move tool** comes up by itself with the new shape picked. Switch it off with ⚙ on the CAD toolbar (or SHAPES ▸ AFTER DRAWING ▸ Then Move).
- **The CAD toolbar** runs along the top of the image editor, over the tool options:

  - – **SKETCH**: CREATE (Create Sketch, Line, 2-Point / Center Rectangle, Center / 2-Point / 3-Point Circle, 3-Point Arc, Polygon, Slot, Spline, Point), MODIFY (Fillet, Trim, Offset, Chamfer, Extend, Mirror, Rectangular / Circular Pattern, Construction), CONSTRAINTS (12 small buttons for what is picked), INSPECT (Sketch Dimension, Measure), INSERT (DXF in, DXF / SVG out), FINISH SKETCH (+ Profiles → Shapes).
  - – **SHAPES**: SELECT (Move, Pick Nothing), DRAW (the shape tools), AFTER DRAWING.
  - – Big buttons show the most used tools; **GROUP** ▾ lists all of them. The tab follows your work (a sketch tool or a sketch layer -> SKETCH). ⌃ folds it to its tabs; **Window** ▸ **CAD Toolbar** hides / shows it.
- **The timeline** has the same toolbar over the preview row: **CREATE** (Text, 3D Text, 3D Model…, Camera, Path, Move / Hand / Zoom / Fit / Select / Mask), **3D** (with a 3D layer picked: the widget, the views, ◇ Key, Bake) and **SKETCH** (**Sketch on This Frame** - the frame at the playhead opens in the image editor with a new sketch layer; **Sketch on a Blank Picture** at the timeline's size). With the Move tool the clip under the pointer is outlined blue on the preview; the picked one stays orange.

## Linked smart objects, PSD smart objects kept, .atn actions (2.469.0)

- **File** ▸ **Place Linked…**: a picture from your computer goes into the project's **linked** folder and comes in as a **linked smart object** ( in the Layers panel). Its contents live in that file: change the file (in any program, or save a new one over it) and the layer follows - when the editor gets the focus back, every 20 s, or Layer ▸ Smart Objects ▸ **Update Modified Content**. Its place, size, warp and smart filters stay.
- **Layer** ▸ **Smart Objects**: **Convert to Linked…** (an embedded smart object's contents saved into the linked folder, the layer and its copies linked), **Embed Linked** (the link dropped, the contents kept), **Relink to File…** (another picture of the linked folder). **Edit Contents** on a linked one: ✔ Done also writes the new contents to its file. A file that has gone shows ⚠.
- **PSD**: smart objects whose contents are embedded in the PSD (PNG, JPEG, GIF or PSD) now open **as smart objects** - their contents and transform kept, so they scale without loss; saving a PSD writes smart objects back as placed layers with their contents embedded (a warped one goes as pixels).
- **Actions** ▸ **Load Actions…** also takes **.atn** action files: the set and its actions come in; recorded steps become the matching steps here - Gaussian Blur, Unsharp Mask, Median, Invert, Desaturate, Equalize, Posterize, Threshold, Mosaic, Add Noise, Emboss, Brightness / Contrast, Hue / Saturation (with their settings), Duplicate / New / Delete Layer, Merge Down, Flatten, Select All, Deselect, Inverse, opacity, fill, blend mode, Rotate, Flip, Stop. A step with no match comes in **switched off**, named after the original step, so the rest plays.

## Actions: brush strokes + hand-made selections recorded, conditionals, Image Processor, droplets (2.468.0)

- **Recording** (Actions tab, ●) now also keeps:
  - – every **brush stroke** of the Brush, Eraser, Pencil, Smudge and the other brush tools - where it went, its size, brush, opacity, flow and colours. Played, it is drawn again at the same place on the picture (scaled with the picture's size); your own tool and colours are put back after.
  - – every **selection you make by hand** (marquee, lasso, magic wand, quick selection, quick mask, Deselect …) - its outline, so playing it on a bigger or smaller picture makes the same selection there.
- ▸ **Actions: Insert Conditional…**: If the document is landscape / portrait / square, there is a selection / none, the layer is a pixel / text / shape / adjustment layer, there are several layers - **then** play one action, **else** another. Conditionals can call actions that have conditionals of their own.

- **File ▸ Scripts: Image Processor…**: pick pictures (files or a folder); save each as **JPEG** (quality 1-12, resize to fit W x H) and / or **PNG** (resize to fit), optionally after playing an action - into the project's batch/<name>-JPEG and -PNG folders, or downloaded.
- **File ▸ Automate: Create Droplet…**: an action + where its results go (project / gallery / download, PNG or JPEG) as a **droplet tile** at the bottom of the Actions tab: drop pictures on it (or click it to choose some) and each is opened, the action played, the result saved (the Batch). ✕ on the tile deletes it.

## Editing single colour channels; spot channels (2.467.0)

- **Edit one colour channel** (Channels panel, next to Layers / Paths): click **Red**, **Green** or **Blue** - from then on painting, erasing, fills, filters and adjustments change **only that channel** (the panel marks it ✎ and shows it in grey). **Shift-click** another to edit two (shown in colour without the third). **RGB** (or Ctrl+2) = all again; Ctrl+3 / Ctrl+4 / Ctrl+5 pick Red / Green / Blue the same way. The layer's transparency is never changed while only some channels are edited.
- **Spot channels**: ◍ in the Channels panel (or Select ▸ New Spot Channel…) - a name, the **ink colour** and its **solidity** (0 = a see-through varnish, 100 = it covers); the selection becomes its ink. Its ink shows over the picture (it is not in the layers until merged); double-click its swatch for the options.
- **Paint an alpha or spot channel**: pick its row, ✎ - the brush adds to it, the eraser takes away (shown like a quick mask); ✔ (or Q) keeps it as one undo step. The selection is not touched.
- ⇣ **Merge Spot Channel** (or Select ▸ Merge Spot Channel): its ink becomes a layer on top, the channel goes. A .bgi keeps spot channels with their colour and solidity.

## OpenType features, optical kerning, type to outlines, text in a shape, round corners on any path (2.466.0)

- **OpenType** (Character panel): buttons for the font's own features - Standard / Discretionary Ligatures, Contextual Alternates, Swash, Stylistic / Titling Alternates, Ordinals, Fractions, Oldstyle / Lining / Tabular Figures, Slashed Zero, the font's Small Caps, Superiors / Inferiors - and a **Stylistic set** (ss01-ss20). The text is then shaped with the font's own file from your computer and drawn from its glyphs (the panel names the file). A font the computer has no file for is drawn as before, without them (the panel says so). Character styles keep them.
- **Kerning ▸ Optical** (Character panel): the letters spaced from their shapes (the white between each pair evened out to the font's own "nn" / "oo"), not from the font's kerning pairs - also needs the font's file.
- **Layer ▸ Type: Convert to Shape**: the text layer becomes a shape layer of its letters' outlines (same name, colour, place, opacity, styles; edit the outlines with the Direct Selection tool). **Type: Create Work Path**: the outlines as the work path (the text stays). Both take everything you set - lines, paragraph text, scales, faux italic, baseline shift, underline / strikethrough, OpenType, a turned text.
- **Text in a shape**: with a shape layer picked, click **inside** its outline with the Type tool (or Layer ▸ Type: Text in the Picked Shape) - the text flows line by line inside that outline (alignment, justify, indents, spacing work there too; what does not fit is hidden). Convert to Point Text takes it out again.
- **Round corners on any path** (Direct Selection, A): ◜ **Radius** + **Round Corners** on the options bar rounds the picked corner anchors - none picked = every corner of the path. Works on a shape that was joined with another (combined, merged), on paths and on vector masks; a radius too big for a side is cut to fit.

## Puppet pin depth + rotation; the Patch tool's Content-Aware mode (2.465.0)

- **Puppet Warp** (Edit ▸ Puppet Warp): the picked pin (the last one added or clicked) now has

  – **Pin Depth ⬆ / ⬇** on the options bar: where the warp folds the layer over itself, a pin set forward draws its part on top, one set back goes underneath (the number by the pin is its depth);

  – **Rotate Auto / Fixed** + an angle: Auto lets the content round the pin turn as the mesh needs (as before); Fixed holds it turned by that angle. **Alt-drag near the picked pin** (on its dashed ring) turns it - it becomes Fixed. Both are kept in a smart object's Puppet Warp (double-click it in the smart filters to change them).
- **Patch** (J group) has **Normal** and **Content-Aware** on its options bar:

  – **Normal** (as before - Source / Destination) + **Transparent** (the texture only half over what was there) + **Diffusion** 1-7 (how far the edge's light and colour spread in: low for grain or fine detail, high for smooth).

  – **Content-Aware**: the selection is rebuilt (no AI) from the place you drag it to - **Structure** 1-7 (7 = only from there, its pattern kept; 1 = from round there too) and **Color** 0-10 (0 = its colours as they are; 10 = blended into the surroundings).
- **Content-Aware Move**: **Structure** 1-7 (how thin the blended edge round the moved part is: 7 = 1 px) and **Color** 0-10 (how much the moved part's colours follow its new place).

## Sketch layers: typed sizes, the Measure tool, units, DXF / SVG files (2.464.0)

The rest of the CAD side of **sketch layers**: exact sizes while drawing, measuring, and files other CAD programs read.

- **Typed sizes while drawing**: once a shape has its first point, just **type a number** - a small box opens by the pointer. **Line**: Length, **Tab** = the Angle (degrees from level, anticlockwise); **Rectangle / Center Rectangle**: Width, Tab = Height; **Circle / 2-Point Circle**: Diameter; **Polygon**: Radius. **Enter** draws it - what you did not type follows the pointer (a line toward a level / upright pointer stays level / upright) - and the typed values are kept as **dimensions** (change them later like any other). A line chain goes on: type the next length straight away. Sums work (100/3). **Esc** closes the box.
- **Measure** (**M** with a sketch tool picked, or in the Sketch tab): click a point, line, circle, arc or spline = its sizes (length, angle, radius, diameter, circumference, area, sweep...); a second click = between the two (distance and ΔX / ΔY of two points, a point to a line or circle, the angle of two lines - parallel ones: how far apart -, two circles' centre distance and gap); a click **inside a closed region** = its **area** and **perimeter** (holes taken out; arcs exact). The numbers show in a box at the top right of the picture ( copies them); Esc clears.
- **Units** ( Sketch tab ▸ Measure + CAD files): px, or **mm / in** with "1 px = ..." - the Measure box and the files use them.
- **File ▸ Export Sketch as DXF...**: an R12 DXF any CAD, laser or CNC program opens - the sketch's origin is 0,0, y goes up, in the units chosen; construction lines (layer CONSTRUCTION) and dimensions (layer DIMENSIONS) if you want them; splines go out as polylines. **File ▸ Export Sketch as SVG...**: the picture's size (a real size in mm / in), the lines and (when the sketch fills them) the profiles. Both are kept in the project's **cad** folder (and downloaded).
- **File ▸ Import DXF...** / **Import DXF from Project...**: lines, circles, arcs, points, polylines (their curved bulges = arcs), splines and ellipses go into the picked sketch layer (or a new one); text, hatches and blocks are left out (it says how many). **Fit to the picture** or **real size round the origin** (1 drawing unit = so many px). Ends that meet are joined, so a closed outline is a profile at once (Fill profiles, Profiles → Shapes, Measure its area).

## Sketch modify tools: trim, extend, fillet, offset, mirror, patterns, polygon, slot, splines (2.463.0)

More CAD tools for **sketch layers** (the **N** tools and the Sketch tab). Everything they make is constrained, so the sketch keeps solving.

- **More drawing tools**: **Polygon** (centre, then a corner; the number of **Sides** on the options bar - a dashed construction circle keeps its corners on it, its sides equal), **Slot** (the two centres, then the width - two half-circles joined by tangent lines round a construction axis), **2-Point Circle** (the two ends of a diameter), **3-Point Circle** (three points on it), **Spline** (click points; Enter or a double-click ends it - a smooth curve through every point; drag the points later with Sketch Select).
- **Trim** (**T**): point at a piece of a line, circle or arc - the piece between the nearest crossings / points turns red - and click to cut it away (a circle becomes an arc; the cut ends stay on what they crossed).
- **Extend** (**E**): click a line near its free end to run it on to the next line or circle in that direction.
- **Fillet** (**F**) / **Chamfer**: click a corner (where two lines meet) or the two lines - a tangent arc with a **radius** dimension, or a straight cut with its distance; the value on the options bar, then type to change it.
- **Modify (what is picked)** in the Sketch tab:
  - ⇉ **Offset…**: a copy at a distance (px) to one side; a joined chain stays joined, lines stay parallel, circles / arcs stay concentric - the distance is a dimension you can change.
  - ⇋ **Mirror**: pick the entities, then the mirror line last - mirrored copies held **Symmetric** about it.
  - ▦ **Rectangular Pattern…** (columns / rows and their gaps) and ✺ **Circular Pattern…** (how many, over how many degrees; round the picked point or the origin) - copies with the same constraints as the original.
- Each one is one undo step; profiles (⬚ Profiles → Shapes, Fill profiles) see the new regions at once.

## Sketch layers: a CAD sketch with constraints and dimensions (2.462.0)

A **sketch layer** is a CAD-style 2D sketch: lines, rectangles, circles and arcs held in shape by **constraints** and **dimensions**. Change a dimension and the sketch follows; drag a point and everything stays as constrained.

- **Layer ▸ New Sketch** (or just draw with a sketch tool): a sketch layer ( in Layers) with a fixed **origin** (the red point) and two construction axes through the middle of the picture.
- **The sketch tools** (**N** in the tool column, N again = the next one). With a sketch tool picked the letters pick the others: **S** Sketch Select, **L** Line, **R** 2-Point Rectangle (also Center Rectangle), **C** Circle, **A** 3-Point Arc, **P** Point, **D** Sketch Dimension; **X** turns what is picked into construction (dashed, never drawn in the picture); **Delete** removes what is picked; **Esc** stops / unpicks.
  - **Line**: click point after point (a chain); **Esc**, a double-click or the chain's first point ends it. Nearly level / upright lines snap and get **Horizontal** / **Vertical**; ending on a point joins them (coincident), on a line / circle keeps the point on it (a line across a rectangle, ends on its sides, cuts it into two regions).
  - **Rectangle**: two corners (or the centre and a corner) - click twice or drag. **Circle**: the centre, then the edge. **3-Point Arc**: the start, the end, then a point on the arc.
  - **Sketch Dimension**: click a line (its length - placed above / below a slanted one = its horizontal size, beside = its vertical size), two points (their distance), a point and a line, two lines (their angle; parallel ones = their distance), a circle (its diameter) or an arc (its radius); then click where the number goes and type the value (sums work: 100-20). Double-click a number later to change it.
  - **Sketch Select**: click to pick (Shift adds); drag points, lines and circle edges - the constraints hold; drag a number to move it.
- **The Sketch tab** (with Properties / Adjustments / AI / ◈ Control): how many **degrees of freedom** are left (✓ **fully constrained** when none), the **constraints** for what is picked - Coincident (two points, or a point on a line / circle), Collinear, Concentric, Midpoint, Fix, Parallel, Perpendicular, Horizontal, Vertical, Tangent, Equal, Symmetric (two points about a line) - Construction, Delete, the drawing tools, and how the layer looks in the picture (line colour + width, **Fill profiles** = the closed regions filled, **Dimensions** shown).

- **Colours while sketching**: blue = still free, black = fully constrained, orange dashed = construction, grey numbers in brackets = driven (reference) dimensions. A constraint that would **over-constrain** the sketch, or that is already set by the others, is refused (a dimension becomes a driven one instead).
- ⬚ **Profiles → Shapes**: every closed region as a **shape layer** above the sketch (fill, outline, generate into it…). ✓ **Finish Sketch** goes back to the Move tool.
- Each change is one undo step; moving / scaling the layer moves its sketch; a .bgi keeps every constraint.

## Poses on the timeline, and the Daz live link (2.461.0)

**On the timeline**: a scene sent from Daz Studio (bitGen Bridge ▸ Scene) opens in the .blend preview over the preview canvas, where the camera already moves ( scene camera / free view). Its Properties now have **Pose**:

- pick the **figure** and a **bone** (type part of its name to find it) and turn it with **X / Y / Z** (degrees, on top of its own pose - or of its animation: the turn rides on the motion). The preview turns it at once; **Reset bone / Reset pose**; Ctrl+Z undoes it. **Save** and **Render to real** give the pose to Blender (keyed over the frames when the figure is animated).
- **To the image editor**: the same scene as a **3D layer** of the image editor with this pose and this view (the free view's place) - there **Generate from it** makes a new image of it.

**The Daz live link (experimental)** - bitGen moves the camera and poses in Daz Studio itself:

- In Daz Studio run **Scripts ▸ bitGen ▸ bitGen Live Link** (from the bitgen-daz-bridge zip, 1.1.0). A small window stays open while it is linked; it asks bitGen about once a second what to do.
- In the image editor's **3D** tab: **Camera → Daz** (Daz's viewport looks through a "bitGen Camera" placed like the 3D layer's view), **Pose → Daz** (the same-named bones of the selected figure turn by your turns), ↺ takes the turns back, ☐ **as I change** sends both on every change. The line above them says whether Daz is linked and which figure is selected there.
- On the timeline: **View + pose → Daz** in the Pose section (the free view + the turns).
- Render in Daz as usual and send it back with bitGen Bridge ▸ Render this frame -> a picture.
- It was written from Daz Studio's scripting documentation and could not be tried in a real Daz Studio when it was made; Daz's bones turn in Daz's own axes, which may not match Blender's. The live link window's log says what failed.

## 3D layers: a Daz / Blender scene in the image editor (2.460.0)

Bring a 3D scene into a picture, move its camera, pose its figures and use the view to make a new image.

- **Send it from Daz Studio**: Scripts ▸ bitGen ▸ bitGen Bridge ▸ **Scene** - the scene (figures with their rig, props, lights, cameras) arrives as a Blender scene in the project (Blender must be installed - Blender settings). Any **.blend** works too.
- **Layer ▸ New 3D Layer (Daz / Blender)…**: pick the scene (Daz sends are marked "Daz ·") or type the path of a .blend. A **3D layer** appears: an ordinary picture layer (masks, filters, moving and blend modes work) that Blender draws again whenever you change its view. The original files are never changed. With no picture open, one opens at the scene's size.
- **The 3D tab** (beside AI / ◈ Control):

  – **Camera**: **Scene camera** (the view Daz / Blender set), **Front / Back / Left / Right / Top**, or type **Turn**, **Tilt**, **Distance** and **Lens** (the field of view in degrees). **Drag the view**: on the canvas drag = orbit round the scene, **Shift**+drag = pan, **Ctrl**+drag or the **wheel** = zoom; a wire box shows the view while you drag and Blender draws it when you let go (about a second).

  – **Pose**: pick the **figure** and a **bone** (type part of its name to find it), then turn it with the **X / Y / Z** sliders (degrees, on top of the pose it came with). **Reset bone** / **Reset pose**.

  – **Frame**: which frame of an animated scene.

  – **Render**: **Quick** (fast, flat shading - what the view uses), **EEVEE** or **Cycles**, ☐ **transparent** background, ▶ **Render** draws the layer at its full size (Layer ▸ Render 3D Layer does the same).

  – **Generate from it**: type what you want in the prompt docker (e.g. "a photo of a woman waving in a sunny park"), then press it - the editor switches to **Edit** and the prompt docker makes a new image from the picture as you see it.

- Every change is **one undo step** (the picture and its camera / pose together). A **.bgi** keeps the 3D layer's scene, camera and pose.

## Tools named by what they do (2.459.0)

The help pages, tooltips, menus, messages, this guide and the brochure now name every tool, panel and feature by what it does - no other products' names. A few names changed on screen: the **Node Pen Tool** (F5 group), the **Shape Tool (nodes)** (F10), the **Dockers** panel group (Window ▸ Float Dockers) and **Layer ▸ Frame**. Files from other programs are still read and written the same way (PSD, Final Cut Pro 7 XML, EDL, OpenTimelineIO, AAF).

## Auto, floorplan and chain dimensions (2.458.0)

- **Auto Dimension** (Layer ▸ Auto Dimension, or ⊞ **Auto** on a dimension tool's bar): the picked object's overall **width** (above it) and **height** (beside it), as two dimension groups held in a group "Size of <name>".
- **Floorplan Dimensions** (Layer ▸ Floorplan Dimensions…, or ⌂ **Floorplan** on the bar): pick a closed shape - a room or the outline of a plan drawn with the shape / line tools - and every **wall** gets a dimension on its **outside**, plus the **overall width and height** further out; all in one group "Floorplan <name>", one undo step. The dialog sets the distance from the walls and whether you want the walls, the overall size or both. (A layer that is not a shape is measured by its box.)
- **The Chain Dimension tool** (F8, with the other dimension tools): click points along a wall - they snap to nodes and corners like the other dimension tools - then **Enter** or a **double-click**, then click where the dimension line goes: a dimension between every two points on one line, and the **total** further out. It runs horizontal or vertical the way the points run; **Shift** = horizontal, **Ctrl** = vertical. **Backspace** takes the last point back, **Esc** cancels.
- ↔ on the bar = how far auto / floorplan dimensions sit from the object. Every dimension they make is an ordinary dimension group: drag its parts, change the scale.

## Dimension groups (2.457.0)

A dimension is now a **group of parts** in the Layers panel: **Extension Line 1**, **Extension Line 2** and the **Dimension Line** (its two arrowheads and its number on it). Each part is its own vector line; the group moves, scales and turns as one, and the parts are always drawn again from the dimension's measurements, so the arrowheads stay on the dimension line and the extension lines keep their gaps.

**Drawing one** (the Parallel and Horizontal / Vertical Dimension tools):

- **Press on an object's edge and drag away** - that edge is measured and the dimension line follows the pointer.
- Or **click a node or an edge, then another node or edge** (an edge gives the point on it square to the first pick), then **click where the dimension line goes**.
- **Shift** = the dimension line horizontal, **Ctrl** = vertical (while drawing and while dragging it). Esc cancels.

**Editing one** (the Move tool, the Shape tool, the path tools or a dimension tool, with the group picked):

- **Drag an extension line**: its measured point slides along the dimension - the length and the number change live (on a snap point it lines up with it; Alt = free).
- **Drag an extension line's nodes** (the squares at its two ends): that extension line alone gets longer or shorter - its gap at the object or how far it runs past the dimension line.

- **Drag the dimension line** (with the Move tool: by the round dot in its middle) - nearer or further; Shift / Ctrl make it horizontal / vertical. With the Move tool the rest of the line or the number moves the whole group.
- One undo step each. A part clicked on the canvas picks its group. The size + unit on the property bar and Layer ▸ Dimension Scale… work on a group; a new scale measures every group again. Older one-layer dimensions still open and drag by their ends (now Shift = horizontal, Ctrl = vertical there too).

## The StoryBoard (2.456.0)

The **video docker is now the StoryBoard** (its header and the status bar button) and it **floats**: ⇱ in its header makes it a window of its own over the app - its title drags it, every edge sizes it, it docks as a tab in a named docker, ⇲ puts it back under the timeline.

- **The StoryBoard bar** (above the scenes): the **image model** the pictures are made with (the prompt docker's image style until you pick another), and what rides with each picture as **reference images**: ☑ **Character sheets** (of the characters the scene's prompt names), ☑ **Locations** (the locations it names), ☑ **Reference images** (the scene's own pictures and the project's References). **All missing** makes every scene's picture that is not there.
- **Each scene** has a **thumbnail**: **make** (↻ again later) renders it from the scene's prompt with that model - an ordinary image job (the Queue shows it); **→ First** / **→ Last** use it as the scene's **first / last frame** (its render starts / ends on that picture); ✕ removes it. The pictures are kept in the project's storyboard folder.

## Edit theme mode leaves dialogs working (2.455.0)

While **Edit theme mode** is on, **dialogs and popup menus work normally**: the Style panel's "a picture as the icon" opens the file dialog and you can browse and pick in it; the image editor's dialogs, Settings, menus, Liquify … take your clicks and keys as usual. They are not outlined and never picked for styling. Esc inside a dialog is the dialog's; elsewhere Esc closes the Style panel, then ends the mode (also with the button focused).

## The panel column is a docker; every tab group floats (2.454.0)

- **Every tab group** in the editor's right column floats with its ⇱: Colour (Color / Swatches / Character / Paragraph), Properties (Properties / Adjustments / AI / ◈ Control), Layers (Layers / Paths / Channels / History / Actions / Comps) and the Dockers (Transform / Shaping / Align / Object). Window ▸ Float … does the same.
- **The column is a docker with drop zones**: drag a floating group by its title over the column - an **orange line** shows where it will go (above or below a group, or at the end) - let go and it is docked there. A floating group can still dock as a tab in a named docker (Window ▸ New Docker…).
- **Resizable**: drag the column's left edge to make it wider or narrower (200 - 640 px).
- The order and the width are kept for next time.

## Frames lock their contents (2.453.0)

- **Locked contents**: what is inside a frame (Lock Contents to Frame - on by default) cannot be moved or transformed by itself in normal mode. Clicking or dragging it with the Move tool takes the **frame**, and the frame's scale / rotate handles move, scale, turn and skew the contents with it (shown clipped to the frame while you drag; one undo step).
- **Right-click** on the canvas: **Edit Frame Contents**, Extract Contents, Lock Contents to Frame (+ Duplicate / Delete Layer). While editing, the contents move / transform / paint on their own and a right-click offers **Finish Editing Frame** first (the ✓ bar on the canvas still works too). On a plain closed shape the menu offers Place Inside Frame….
- A double-click on a frame now gives the Move tool's rotate handles (like any layer).

## Move tool: scale / rotate handles, transform options (2.452.0)

With the **Move tool (V)**, the active layer has handles:

- **Click once** = the **scale handles** (8 squares): a corner scales both ways from the opposite corner - **Shift** keeps the proportions, **Alt** scales from the centre; a side handle stretches one way.
- **Double-click** = the **rotate handles**: drag a corner (curved arrow) to turn round the centre - **Shift** = 15° steps; drag a side handle (↔ / ↕) to skew. Click once again for the scale handles.
- While dragging you see where it goes; letting go applies it - one undo step. A drag anywhere else still moves the layer. Pixels are redrawn once, shapes stay vector, **type stays editable** (it can be turned now), smart objects keep their contents, a group transforms all of its layers.
- **Transform options** (the options bar): ∠ angle + ↻, 90 / 90, ⇋ / ⇵ flip, W % x H % ( together) + - all round the layer's centre.

## The editor's Edit / Generate tabs drive the prompt docker, Del, quick prompts (2.451.0)

- **AI ▸ Edit tab**: the prompt docker switches to **Image** by itself (even from Video), its style to **Qwen Image 2.1 edit**, and its big button reads ✏ **Edit** - type the instruction there and press it. The tab's own Edit button and model row are gone. Nothing open yet = it says to open a picture first.
- **AI ▸ Generate tab**: the prompt docker's button reads **Generate** and renders into the selection of the selected layer; ✔ Apply blends it in (like Krita AI). No picture open = a new picture, the usual way.
- Another tab (Refine, Remove …): the prompt docker goes back to the mode and style it had.
- **Del** deletes the current layer (with a selection it clears the selection; Shift+Del always deletes the layer).
- **Quick prompts** - in the prompt docker's menu bar: **Save** keeps the prompt (its first line names it; the same first line again replaces it), ⚡ **Quick prompts ▾** lists them - pick one to put it in the prompt box, deletes the one picked last. They are kept in quick_prompts.json in the install folder (every project).

## Warp grid + split lines, Liquify extras (2.450.0)

**Edit ▸ Transform ▸ Warp** - the options bar now has:

- **Grid**: Default / 3 x 3 / 4 x 4 / 5 x 5 / Custom (columns x rows, 1 - 10 each) - more cells = finer control. The warp you already made is kept.
- **Split Warp ✚** Crosswise / **┃** Vertically / **━** Horizontally: click on the warp where the split line goes - the picture does not move, you just get more points there. **Alt-click** a split line to take it away.
- Drag a grid point (where lines cross - its handles go with it), a handle, or anywhere inside to bend that cell. Enter applies; a smart object keeps the grid.

**Filter ▸ Liquify…** gains:

- **Smooth (E)**: evens out the distortion under the brush (hold or brush over it).
- **Push Left (O)**: drag up = the pixels go left, down = right (Alt = the other way).
- **Face-Aware Liquify**: the ☺ **Face tool (A)** - drag an oval round a face; its eyes, nose and mouth are placed inside and can be dragged where they really are. Then the sliders: Eye Size / Height / Width / Distance, Nose Height / Width, Smile, Mouth Width / Height, Forehead, Chin Height, Jawline, Face Width (-100 .. 100). Reset Face puts them back; OK applies the brushes and the sliders together. No face placed yet = a guess in the middle.

## Per-character type (2.449.0)

Different letters in ONE text layer can have their own settings:

- While typing (the Type tool's box is open), **select some letters**, then change the **font, B, I, size, tracking or colour** in the options bar - or anything in the **Character** panel (vertical / horizontal scale, baseline shift, faux bold / italic, All Caps, Small Caps, superscript / subscript, underline, strikethrough). Only those letters change; the typing box stays open with them still picked. Each change is one undo step.
- **Nothing selected** (just the caret) = the whole layer, as before.
- Typing inside a styled run takes its style (the letter before the caret's).
- Letters of different sizes share one baseline; each line is as tall as its largest letters. When sizes / fonts differ, the typing box floats above the text (like warped text) so the letters can be picked reliably.
- **Layer ▸ Type: Clear Character Overrides** puts every letter back to the layer's own settings.

The layer keeps the paragraph settings (alignment, leading, the paragraph box). Text on a path, vertical, warped, 3D and text-effect-preset text keep one style.

## The Content-Aware Fill workspace (2.448.0)

Select what to remove, then **Edit ▸ Content-Aware Fill…** - a workspace of its own:

- **The picture**: what is filled outlined in red, the **sampling area** (where the fill may take pixels from) in green.
- **Sampling**: **Auto** (a ring round the selection), **Rectangular** (the box round it) or **Custom** - paint it with the **Sampling Brush**: **+** adds, **−** (or Alt) takes away, its size. **↺ Reset** = Auto again; **show it** turns the green off.
- **Preview**: the result next to it, again after each change (after a short pause).
- **Colour Adaptation**: None / Default / High / Very High - the fill's colours and light blended into its surroundings.
- **Output To**: Current Layer / New Layer / Duplicate Layer. **OK** = one undo step. The choices are kept.

PatchMatch (no AI): only patches from the sampling area are used.

## Artboards (2.447.0)

Several **artboards** in one picture - each a page of its own size (a post, a story, a banner …).

- **Layer ▸ New ▸ Artboard…**: a name, a size (the picture's, a preset - Instagram post, Story / Reel, Full HD, 4K, A4, YouTube thumbnail, X post - or your own), its background colour (or none), and whether the picked / active layers go into it. The first sits at the picture's top-left; the next ones to the right of the last, and the canvas grows to hold them.
- **The Artboard tool** (in the Move tool's group - press V again): drag a rectangle = a new artboard there.
- **Layer ▸ New ▸ Artboard from Group**: the active group becomes an artboard round what is in it.
- An artboard is a group: its layers show **only inside its rectangle**, over its background; its name and outline are drawn above it. Moving it (Move tool, arrows) moves its layers with it. **Properties**: X / Y / W / H, the background, ⇱ **Fit** (the rectangle round what is in it). Canvas Size and Image Size move / scale the artboards too.
- **File ▸ Export ▸ Artboards to Files…**: each artboard as its own PNG (only its own layers) - into the project's Images as <picture>-<artboard>.png, and / or downloaded. A .psd keeps them as PSD artboards; a .bgi keeps them.

## Rulers, guidelines and snapping on the timeline's preview canvas (2.446.0)

in the timeline's menu bar (beside ⊞) shows **rulers** along the top and the left of the preview canvas - in the picture's pixels from its top-left corner, following the zoom and the pan.

- **A guideline**: drag from the top ruler (a horizontal one) or the left ruler (a vertical one) onto the canvas.
- **Move it** with the Move tool (the pointer turns into ↕ / ↔ over it); **drop it back onto its ruler** to remove it; **double-click it** to type its place. Guidelines belong to the timeline (saved with it) and are drawn in the guideline colour (⚙ Timeline settings ▸ Grids & Guides).
- **Snapping**: a layer moved with the Move tool snaps its edges and its centre to the guidelines, the picture's edges and centre, and - while the grid shows (⊞) - the grid's lines, within the snap distance. Hold **Alt** to move freely.

## Grid buttons, the Grids & Guides settings (2.445.0)

⊞ turns the grid on and off - on the image editor's top bar (before ) and in the timeline's menu bar (beside , the grid over the preview canvas).

The settings are a **Grids & Guides** tab - in the image editor's ⚙ settings and in the timeline's ⚙ **Timeline settings**:

- **Grid spacing** (picture pixels; 0 = it follows the zoom) and **Major grid every** n lines (drawn stronger; 0 = none)
- **Draw the grid as** lines or dots (a dot at each crossing, bigger on the major ones)
- **Grid colour** and how strong it is, **Guideline colour**, **Guideline snap distance** (screen pixels)

The editor keeps them with its other settings (View ▸ Grid and Snapping… opens the tab); the timeline keeps them in the settings file (the same for every browser), the ⊞ on / off too.

## The image editor's Edit / Generate run from the prompt docker, ⚙ editor settings (2.444.0)

With the image editor open and its **AI** panel showing:

- **Edit** tab: the prompt docker's image style switches to **Qwen Image 2.1 edit** and its button reads ✏ **Edit**. Type the instruction in the prompt docker ("make her jacket red", "turn it into a watercolor") and press ✏ Edit - the selection is edited (no selection = the whole picture). The panel's own Edit button, model list and prompt box are gone - the prompt docker is where you type. Leaving the Edit tab puts the prompt docker's style back.
- **Generate** tab: the prompt docker's button reads **Generate** and renders INTO THE SELECTION OF THE SELECTED LAYER (no selection = the whole picture). The results come in as before (click one to compare); ✔ **Apply** blends the shown one into that layer - only inside the (feathered) selection, one undo step - like Krita's AI. On a text / shape / group layer it becomes a new layer. (⚙ ▸ AI can make Apply always add a new layer.)
- Another panel tab showing (or the editor closed): the prompt docker works as before (a picture onto the canvas as a new layer).

⚙ at the right end of the editor's menu bar (or Edit ▸ Preferences…, Ctrl+,) opens the editor's settings: AI (results, context, feather, megapixels, what ✔ Apply does) and Interface (the look, rulers, panels, the options bar).

## Edit theme mode: style anything on screen (2.443.0)

in the top bar (next to ⚙ - or Settings ▸ Themes ▸ **Edit theme mode**) turns on EDIT THEME MODE: the element under the pointer is outlined, and a click PICKS it instead of using it (⚙ does not open Settings, a button does not run). The **Style** panel opens beside it:

- **Apply to** - this element only, all like it in this panel, all like it (the same kind with the same classes - every ghost button, say), or every element of its kind; the number it matches now is shown.
- **Text** - font, size, weight, colour, text shadow (x, y, blur, colour).
- **Box** - fill, border colour, corner radius, button shadow (x, y, blur, spread, colour, inset).
- **Icon** - a new icon (an emoji / a symbol, or a small picture - png, svg, jpeg, webp, gif), its position (left, right, above, below, icon only, hidden), its size and its fill (an emoji is tinted too). The words stay as they are.
- ⬆ picks the element around it, ↺ **Clear** removes the rule; drag the panel by its title.

Every change shows at once. **again** (or Esc twice) = LIVE mode: clicks work again and the styles stay. They are kept in this browser and with the theme: **Save theme** writes them into themes<name>.json, loading / importing a theme brings its own. Settings ▸ Themes lists the rules (× each, ↺ **Clear element styles**). In a dialog that is open on top, the panel opens inside it.

## Frames: layers inside a shape, Edit Frame, generate into a shape (2.442.0)

**A frame** is any closed shape - a rectangle, an ellipse, a polygon, a closed path - with layers INSIDE it: they show only within its outline (its fill behind them, its outline on top), and in Layers they are a tree under the shape (▾ opens / closes it).

- **Put layers in**: Ctrl-click the layers in Layers (pick them), make the shape active, then **Layer ▸ Frame ▸ Place Inside Frame…** - the dialog shows the frame (any closed shape can be chosen) and can centre the contents in it. Or drag a layer onto the MIDDLE of a closed shape's row in Layers.
- **The frame moves as one**: move, turn, scale or skew the frame (the Move tool, the property bar, the Transform docker, the path tools) - everything inside moves, turns and scales with it (live while dragging; one undo step). **Lock Contents to Frame** off = the frame moves alone.
- **Edit Frame Contents** (double-click the frame with the Move tool, or the menu): the contents show whole (what is outside the frame faint) and each one can be moved, transformed, painted like any layer; the bar on the canvas - ✓ **Finish Editing Frame** - goes back to normal mode. In normal mode a click on the contents picks the frame.
- **Extract Contents**: the layers come out, above the frame, where they are.
- **Generate into a shape**: with a closed shape active, AI ▸ Generate makes the picture in the shape's box and ✓ Apply puts it INSIDE the shape (a frame). Layer ▸ Frame ▸ Generate Into the Picked Shape turns this off.
- A frame goes to a .psd as a group (the shape + its contents clipped to it) and stays a frame in the .bgi.

## CAD dimensions: exact points, live ends, a scale (2.441.0)

**Exact points**: with a dimension tool (Parallel, Horizontal / Vertical, Angular) the pointer snaps like a CAD program - to a shape's nodes and the middles of its sides, the corners and side middles of every layer (a picture's too), the nearest point on a shape's outline, guideline crossings - the point it takes is marked and named while you hover (Alt = no snapping).

**Drag an end**: pick a dimension with the Move tool (or the Shape tool / the path selection tools) - its two ends and its line show handles. Drag an end: the dimension and its number follow live. **Shift** keeps the end level with the other end (horizontal), **Ctrl** straight above / below it (vertical) - since 2.457.0. The middle handle moves the dimension line. One undo step each. (With a dimension tool a click on an end starts a NEW dimension there.)

**A scale**: the property bar of a picked dimension shows its size and a unit. Type the real size and pick the unit (mm, cm, m, km, in, ft, yd, mi): that is the picture's **scale** - every dimension in it is measured again with it, and the ones you draw next use it too. ⚖ (or Layer ▸ Dimension Scale…) sets the decimals or clears the scale. A picture keeps its scale (in its .bgi too); each picture has its own.

## Rulers, guidelines and snapping (2.440.0)

**Rulers** (View ▸ Rulers, Ctrl+R) count in the unit of **View ▸ Ruler Units**: pixels, millimetres, centimetres, inches or points (at the document dpi set in View ▸ Grid and Snapping…).

**Guidelines**: drag one out of a ruler - out of the top ruler a horizontal one, out of the left ruler a vertical one. Move one with the **Move tool** (or hold Ctrl with any tool); drag it back onto a ruler (or off the picture) to remove it. View ▸ Guidelines (Ctrl+;) shows / hides them, **Lock Guidelines** (Alt+Ctrl+;) keeps them where they are, **New Guideline…** places one by typing its position, **Guidelines…** lists every one (change a position, delete, add, clear all), **Clear Guidelines**. A document keeps its guidelines (in its .bgi too). Double-click a ruler for the list.

**Snapping** - View ▸ Snap To: **Snap** (Shift+Ctrl+;) switches it on / off, and what to snap to: **Grid**, **Guidelines**, **Objects** (the other layers' edges and centres), **Nodes** (a shape's points), **Midpoints** (of its sides), **Intersections** (where guidelines cross, with the page edges), **Page** (its edges and centre). At first: guidelines, their crossings and nodes. The drawing, selection and path tools (the marquees, Crop, the Pens, the Shape tools, the vector lines and shapes, dimensions, connectors) snap the pointer; the **Move tool** snaps the layer's box - its left / centre / right and top / middle / bottom - onto what is near. What it snapped to is shown at the point (guideline, node, midpoint, centre, edge, intersection, grid). **Grid and Snapping…**: the snap distance (screen pixels), a fixed grid spacing (0 = the grid as drawn at this zoom), the document dpi, the guideline colour.

## The property bar, corner radii, Add / Subtract into a shape, line width and style (2.439.0)

The image editor has a second bar under the tool's options - the **property bar** of the picked layer: **X, Y, W, H** in pixels (its box) - type a value and press Enter; keeps the proportions (a new width changes the height with it, and back), changes one side only. Each change is one undo step; a vector shape stays vector (its corners and outline stay sharp), text is resized, pixels are resampled.

A **rectangle** (a Rectangle-tool rectangle, F6, or a Shape-tool rectangle, U) shows its four **corner radii** ⌜ ⌝ ⌟ ⌞ - changes all four together, unlinked each corner is its own. A **vector shape or line** shows its **outline width** (type it, or pick from the list: none, hairline, 1 … 24 px) and its **line style**, picked from a picture of each (solid, dashed, dotted, dash-dot …; Custom… opens the Outline Pen, F12).

The F6 shape tools (Rectangle, Ellipse, Polygon, Star …) have a **draw mode** at the start of their bar: □ **New** (each shape a layer of its own), ⊕ **Add**, ⊖ **Subtract**, ⊗ **Intersect**, ⊘ **Exclude**. In a mode other than New, a shape drawn while a vector shape is picked becomes a part of that shape - added to it, cut out of it … - and the shape it already was stays exactly as it was (both parts can still be edited as nodes; undo takes the new part away again).

## Floating dockers, named dockers, dialogs in the middle (2.438.0)

**The image editor's panel groups float**: ⇱ at the end of the Layers group's tabs (Layers / Paths / Channels / History / Actions / Comps) or the Colour group's (Color / Swatches / Character / Paragraph) - also Window ▸ Float Layers Panels / Float Colour Panels. The group becomes a window of its own inside the editor: drag it by its title, size it by any edge or corner; ⇲ or × puts it back in the right column (Window ▸ Panels Back in the Column puts both back).

**Named dockers**: Window ▸ New Docker… in the image editor, or ⊞ Docker layout ▸ ▣ New docker… in the menu bar - an empty floating docker with your name for it (double-click the name to rename). Drag any floating docker by its title over it - it lights up - and let go: it is docked there as a tab (click a tab to show it; its ⇱, or dragging the tab away, floats it again). Named dockers dock in named dockers too. ⚙ on a named docker: Rename…, **Main docker** (it floats over the whole app) or **Confined to** a docker (the image editor, the timeline, another named docker … - it stays inside that docker and hides with it), Delete (what is in it goes back where it came from). Where everything is - floating, docked, sizes, names, tabs - is kept in **panel_layout.cfg** in the install folder.

▣ **Docker - an empty docker the others drop into** (2.545.0): ▣ **Docker** in the statusbar (after Queue) or **Ctrl+Alt+D** shows / hides it. Float a main docker with ⇱ in its title bar (Preview, Timeline, Image editor, ComfyUI, Music, Stems, SFX, Chat, Console; the StoryBoard has its own ⇱), then drag it by its title over ▣ Docker - an orange line shows where it will go - and let go.

- **Side by side or stacked**: ⇆ in its title bar = side by side (horizontal), click = ⇅ stacked (vertical); ⚙ ▸ Layout also has **Tabs** (one at a time, as named dockers always were). Every named docker can do this.
- Side by side / stacked, each docker in it keeps a small title bar: drag it out (or ⇱) to float it, ⇲ puts it back in the main window. Drag the bar between two to size them.
- **Double-click the title** to rename it in place - Enter keeps it, Esc leaves it as it was.
- What is in it, the order, the sizes, the layout and the name are kept in panel_layout.cfg.
- 2.549.0: **drag a main docker in by its own title bar** - press on Music's (or Preview's, Timeline's …) title and drag it over the ▣ docker; a tag follows the pointer and the orange line shows where it lands. A plain click still folds the docker. (The ⇱ on the title bars was an empty button since 2.545.0 - it shows ⇱ again.)
- 2.549.0: the statusbar button carries the docker's **name** (▣ Audio). Its title bar has **Make permanent** - it becomes a regular docker in the main column with the regular title bar (▾ fold, ⇱ float it again, , maximize), its statusbar button shows / hides it, the grip under it sets its height, floating dockers still drop into it - and **Delete** (asks first; the dockers in it go back where they came from, the docker and its button go). Ctrl+Alt+D then makes a new one.
- 2.550.0: **right-click a ▣ docker's title bar** (floating, or made permanent) for Rename…, Side by side / Stacked / Tabs, Make permanent or ⇱ Float it again, and Delete docker. Only the dockers you made have it. A permanent docker goes where the window was (before the main docker under its middle) and takes room in the column (it shrinks with the others down to 180 px - it was added at the bottom and could sit below the room the column has).
- 2.558.0: a floating ▣ docker no longer sits **above every other docker**: it is one of the app's floating dockers (with the floating prompt docker, Basic Settings and LLM tokens), and the one you clicked last comes to the front. While you drag a docker by its title bar every ▣ docker shows a **dashed orange outline**, so you can see where to drop it.
- 2.558.0: more dockers go in: **Settings, References, Assets, Queue and Gallery** (the side columns - press on their title, not their ▾ / ) and the **StoryBoard** are dragged in by their title bar like the others. A side docker's column closes while it is in a ▣ docker, and ⇲ puts it back in its own place with its column open again. (The prompt docker, Basic Settings and LLM tokens dock with their own drop zones and do not go into a ▣ docker yet.)
- 2.559.0: every **folder filter** remembers the folder you picked until you pick another - the ComfyUI model dropdowns' folder filter (Settings, Basic Settings, the LoRA rows - each dropdown its own), the model browser, the character dialogs' LoRA folder and the Model manager's folder tabs (each tab its own). Kept in **folder_filters.cfg** in the install folder, so they survive closing and restarting the app.
- 2.559.0: **Basic Settings are kept in basic.cfg** in the install folder: every change (by hand, or by a style or a project) is written to it a moment later, and the app reads it back when it starts (after the open project's own settings), so you start with the Basic Settings you last had. The style card's model dropdowns are not in it (they save into the style). To start Basic Settings from scratch, close the app and delete basic.cfg.
- 2.560.0: a ▣ docker **docks like the other dockers**: drag a floating ▣ docker by its title bar near the edge of a docker

  – the same blue drop zone as Basic Settings shows ("Dock Docker above Preview") - and let go: it docks above / below a docker, left / right of it (side by side), or at the top / bottom of a side docker (Settings, References, Assets, Queue, Gallery). Its edge sizes it; drag its title bar away and it floats again (and can be dropped on another edge at once). Where it is docked comes back at the next start.

- 2.560.0: **Basic Settings, LLM tokens and the prompt docker go into a ▣ docker**: drag them by their title bar over a ▣ docker (floating or docked) - it is outlined and an orange line shows where they go - and let go. Drag their small title bar (or their tab) out of the ▣ docker, or press ⇲, and they float on their own again. They come back in their ▣ docker at the next start. (Near a docked ▣ docker's edge they dock beside it instead, as before.)
- 2.561.0: a ▣ docker can become a **column of its own**: drag it by its title bar onto the seam **between two columns** (Settings | References | Assets | the main column | Queue | Gallery - or the window's left / right edge). A tall blue strip shows ("New column: Docker between References and Assets"); let go and it is a full-height column there, with its own splitter to size its width. ▾ folds it to a narrow strip, its statusbar button hides it, and dragging its title bar away floats it again. The column, its place and its width come back at the next start.
- 2.562.0: a StoryBoard scene whose render (or upscale, or ✎ First frame) job was **interrupted by a restart** now says "interrupted by a restart - ↻ Resume it in the Queue docker (Pending tab) and it carries on here" and remembers the job. Press ▶ **Resume** on that job in the Queue docker's Pending tab and the scene takes it back: it shows as running again with its progress bar, and the take lands in the scene when it finishes. (Discard the job instead and the scene says so.)
- 2.562.0: **nothing plays by itself** - a finished job, a take opened from the Done tab or the timeline, the running job's joined preview, the lightbox, the StoryBoard's Watch and the swap dialog's preview load their video or song paused; press ▶ (or Space) to play.
- 2.563.0: **a scene's pictures can come from the other scenes**: the picture picker ( on a scene, ✎ First frame's / / , and the First / Last frame slots) opens on **Scenes** - every other scene's own pictures under its number (its First / Last frames, its reference pictures, its ✎ pictures) - and **Clips** takes a frame of any rendered take, for a scene's reference pictures too. A picked picture says where it came from ("scene 1 · First frame").
- 2.563.0: ✎ **First frame ▸ Picture A**: pick the picture the scene starts from and set *Start from* to Picture A. Its style, composition, camera framing and the people's poses are kept exactly; the place is the location picture if you pick one, else the location the scene (or the board's global prompt) names, with its view picture, else Picture A's own place. **Write** has the LLM write the instruction (it names the pictures as <image1>, <image2> …) - edit it if you like; ✎ Make first frame with Picture A and an empty direction writes it first. The edit style picked in the accordion makes the frame.
- 2.564.0: **Voice chat - talk to the app.** Press **Voice** in the statusbar (or **Ctrl+Alt+V**) and just talk - there is nothing to hold: it hears when you start and stop speaking, writes down what you said (faster-whisper on this computer, kept loaded while you talk), and the local LLM answers out loud (your computer's own voices) and DOES what you asked: write or change the prompt ("write me a prompt of a fox in the snow"), the negative prompt, pick a style, change Basic Settings ("make it eight seconds", "720p", "16:9"), what Generate makes, the video mode, press Generate, make a still, stop the running job, add or render a StoryBoard scene, show a docker. What it did is listed under its answer. While it speaks it does not listen. pauses listening, / its voice (and which voice), the box at the bottom lets you type instead, ✕ (or saying goodbye) ends it. It needs faster-whisper (Settings ▸ Audio) and an LLM (Settings ▸ LLM). 2.564.0 also fixes ✎ Write (2.563.0) and the phone's chat, which showed "[object Object]" instead of the LLM's words.
- 2.565.0: **the StoryBoard is a storyboard**: ▦ (the new default) shows every scene as a card like the Model manager's - its storyboard picture (else its First frame), "Scene n", its state and its text - in a grid with an ➜ from each scene to the next. On a card: makes its picture (↻ another), ▶ renders it, → First starts it on the picture. Click a card and its full scene card opens under the grid with everything it had (the prompt, Ref / First / Cont / Trans, the frames, its pictures, ✎ First frame, the filmstrip …); ✕ (or "All scenes" in the picker) closes it. shows the list as before.
- 2.565.0: **Write storyboard** (the StoryBoard bar): give it a brief - the LLM writes the scenes (your characters, the ticked references) and every scene gets its storyboard picture, made with the bar's image model and references (☑ Character sheets / Locations / Reference images). With ☑ **Start on it** each picture becomes its scene's FIRST frame (a Ref scene turns First) - change it with ↻ or the scene's First frame picker. The writer needs at least one character.

- 2.566.0: **MOSS-Image** (OpenMOSS's open 5B image model, Apache-2.0 - strong at text in pictures and layouts) is a model type: the image styles **MOSS-Image** (SFT - the one to use) and **MOSS-Image Base** (for LoRAs). **Settings ▸ Add-ons ▸ MOSS-Image** downloads its files from Comfy-Org/MOSS-Image into ComfyUI's folders - tick SFT / Base (int8, 5.4 GB; bf16 for more precision), the text encoder (Qwen3.5 9B) and the VAE are always included - and puts the styles back if you deleted them. It needs ComfyUI from 16 Oct 2026 or later (the add-on checks the running ComfyUI and tells you to update it if it is older); about 14 GB of VRAM with the int8 files. 25 steps, cfg 2.5 (ComfyUI's own template).
- 2.567.0: the **theme editor** ( Edit theme mode ▸ the Style panel) can line text up and space things out: **Text ▸ Align** ⇤ ↔ ⇥ (left / centre / right / justified) and ↕ (top / middle / bottom) - it works on buttons, rows and columns of items and blocks of words alike; **Text ▸ Padding / Margin** = the space around the words themselves (plain-text elements); **Box ▸ Corners** rounds each corner on its own (↖ ↗ ↘ ↙, over Radius); **Box ▸ Padding / Margin** = the space inside / outside the element's edge. Four boxes each (top, right, bottom, left); **=** copies the first value to all four; – (or an empty box) = its own. Saved with the theme like the rest.
- 2.568.0: the **StoryBoard's pictures are written by the LLM**: sends the scene back to the LLM, which writes the picture's prompt - the scene's opening frame (who, what, where, framing, light), naming the reference pictures. The references are the **character sheets** and the **last frame of the scene before** (when that scene has a rendered take - the picture continues from that moment); with no take before it, it is the characters + the scene's words. ☑ LLM writes it / ☑ Previous last frame on the StoryBoard bar (both on). **changes a picture** - a picture of another scene, a frame of a take, any project picture or a file (with ☑ Start on it, it becomes the scene's First frame too). In the grid **the picture is the whole card**: the scene's name and two lines of its text over the bottom, the buttons on hover; the tooltip holds the full text and the picture's prompt; a click opens the scene's full card.
- 2.569.0: **Zones in the image editor** - boxes on the canvas that say what the AI puts where ("a kite" here, "a dog" there, "a bench" there). AI panel ▸ Zones ▸ **Draw boxes** (the Zones tool, with the marquees): drag on the canvas for a box (each gets its colour and number), drag a box to move it, its edges / corners to size it, Delete removes the picked one; type what goes in each box in the list. Optional: the scene (the whole picture). Then pick HOW and **Generate zones**: ▣ **One box at a time** - a Generate (Add content) per box with the fill style, all queued at once into Pending; ☑ Apply as they come puts each box's first result in as its own layer. ✎ **Edit model, one pass** - the picture with the boxes outlined in their colours goes to the Edit model once ("Put a kite inside the red box …, remove the outlines"): the light matches best, the place is looser. ▦ **Regional prompt, one pass** - a NEW picture from the boxes with a ComfyUI image style: the scene's words over the whole, each box's words only inside it (ComfyUI's area conditioning - best with SDXL-type styles; FLUX / Qwen follow it more loosely). A picture starts on ▣, a blank canvas on ▦. The boxes are kept with the document (and its .bgi) and are never painted into the picture.
- 2.570.0: **Pen tablet** (XP-Pen, Wacom, Huion … through Windows Ink) in the image editor - the **Pen** tab next to Brush (Window ▸ Pen Tablet): a **test pad** that shows the pressure, the tilt, which end of the pen and the **pressure levels** your pen sends (~8192 for an XP-Pen); the **pressure curve** like the driver's (Extra soft, Soft, Linear, Firm, Extra firm, S-curve - or drag its points), **Lightest touch** and **Full pressure at**; ☐ **Pressure → size** / ☐ **Pressure → opacity** for every brush (and its smallest size); ☑ the **eraser end** erases (the brush comes back when you turn the pen round); the **side button** = Eyedropper; ☑ **tilt** turns the tip ( Brush ▸ Shape Dynamics ▸ Angle / Roundness control: Pen tilt); ☐ a mouse: pressure from speed. Seven **pen brushes** in the brush presets ▾: G-pen, Mapping pen, Brush pen, Real pencil, Fineliner, Technical pen, Calligraphy (a 45° nib that turns with the tilt). No pressure? XP-Pen's Pen Tablet settings ▸ tick **Windows Ink**, then restart the app.
- 2.571.0: **select several clips and drag them all onto the timeline** - in the Gallery, the Assets dock and the References tray: **Ctrl-click** adds / takes away one, **Shift-click** selects the range from the last one you clicked (Ctrl + Shift adds a range); a plain click works as before (one tile; the Gallery opens it in the viewer). Drag any of the selected and all of them go: dropped on the timeline (or the preview), they are laid down **oldest first** - the oldest on the top layer, the newest at the bottom, each on its own layer, one after the other from where you dropped them. **Sequential** on

the timeline's bar (next to ripple) arranges every clip one after the other with no gap, down the layers from the top (V1, the picture layers, the video layers), and keeps it that way while it is on: delete a clip and the ones below close up; put in a layer with a clip and the ones below make room; trim a clip and they follow. Sound layers, text, shapes and the karaoke layer stay where they are.

- 2.572.0: **Auto transition [N] frames [type]** on the timeline's bar - at every cut between two video clips on different layers the next clip comes in over N frames (dissolve, fade, wipes, slides, circle, zoom ...) **without moving anything**: every clip keeps its start, so the lip sync with the song stays frame-exact. The clip before the cut is held underneath for those frames (its own frames past its end when the file has them, else its last frame held). On = kept at every change (after Sequential); off = plain cuts again; a transition you set yourself is left alone. Clips that are all on V1 use V1's own join (Out), which overlaps them. / **Video sound** mutes or unmutes V1 and every video layer at once, so the full song on its sound layer plays with no cuts in it.
- 2.573.0: ✂ **cut duration** on the StoryBoard's song strip (the audio clip's menu bar, before Transition): the seconds the song is auto-cut into (2-60, presets 10 / 15 / 20 / 29.9). A change re-cuts the open song at once - segments you locked by typing a duration stay where they are - and the value is remembered for the next song; saves the .seg and the scenes as before. 29.9 keeps every scene inside ONE Long video run (⚙ Long video, MiniMax H3: 719 frames); 30.0 is 720 frames and would render as two joined runs.
- 2.573.0: **ComfyUI updates** (Settings ▸ ComfyUI ▸ Engine, under ▶ Start / ■ Stop): this ComfyUI's version and kind of install, the channel (Newest = master, what the portable build's update_comfyui.bat does - new models such as FastH3 Omni arrive there first; Stable = the newest release), Check and Update ComfyUI. The portable build runs ComfyUI's own updateupdate.py (it installs the new requirements itself); a git clone is fast-forwarded (or moved to the newest release tag) and pip installs requirements.txt. A ComfyUI bitGen Studio started is stopped first and started again; one started some other way has to be closed first. Node packs are not touched.
- 2.573.0: **the update check on startup** - 20 s after the app starts it asks GitHub about bitGen Studio AND ComfyUI; something newer puts a ⬆ in the status bar (a click opens the right Settings tab) and a small card once per new version (Open / Later / Don't check on startup). Settings ▸ General ▸ Updates ▸ "Check for updates on startup" turns it off or on. Offline = nothing at all.
- 2.573.0: **FastH3 Omni** - FastVideo's 8-step distillation of MiniMax H3's reference-to-video model (pictures, videos and voices in, video with sound out, several times faster). Settings ▸ Add-ons ▸ FastH3 Omni downloads it (22 GB int8; H3's text encoder and VAEs only when missing); ComfyUI 0.43 or later ( Update ComfyUI, Newest). Use it as the video style **FastH3 Omni**, or the StoryBoard's Workflow ▸ **FastH3 Omni · ref2va 8-step** (renders like H3_Video_Ref: every scene ref2va, scene n carries scene n-1's take). Any H3 graph whose model is a FastH3 file (Basic Settings ▸ Override style ▸ Model) gets its recipe automatically: sigma shift 12/3, VSA sparse attention, 8 steps, cfg 1, the base model's turbo LoRA taken out; Sage / Spectrum / Veda are skipped (they would replace VSA). Omni is a reference-to-video model - First / Cont / Trans (fl2va) scenes should stay on H3's own fl2va model.
- 2.574.0: **theme edit mode ▸ Text on any words** - a docker's title bar (pick it: Text shows its title, aimed at that docker only) and any element that has words of its own beside buttons or boxes (a label with its checkbox) can be given new words; the ▾ / ▸ caret, the and the buttons stay, a collapse keeps the new title, ↺ Clear brings the old one back. Elements with no words of their own say so - pick the words themselves.
- 2.574.1: **Apply to ▸ This element only** is the first choice for every element you pick in theme edit mode, and the default - each pick starts on it (the panel no longer keeps the last element's Apply to). New words always belong to the picked element only: with a wider Apply to (All like it, Every ) the rest of the style goes wide but the words stay on that one element. A text rule that finds several titles, or a bare tag (div, button), never renames them - a theme where every docker took one name heals by itself; rename the docker you meant again.
- 2.575.0: **Model manager - your own files of a model**: on a card's page, **Add...** pictures, videos or sounds (or drop them there from the gallery / Assets). Each one keeps the prompt, negative, seed, cfg and steps it was made with - read from this app's own render record, a PNG's ComfyUI graph or A1111 text, or a video's / song's tags - and ✎ edits them. A click on any picture (yours,

Civitai's examples, the hero thumbnail) opens it whole in the viewer; ✎→ sends its prompt with its seed, cfg and steps to the prompt box and Basic Settings; makes it the card's thumbnail (or ✎ Edit ▸ Thumbnail ▸ Change… a picture from disk; ↺ Its own goes back). Kept in model_info with the model's page - the model folders are never touched.

- 2.575.0: ✎ **Edit card**: **Your rating** is five stars in half steps - hover to see, click (the left half of a star = ½), ← → by halves, × clears; **Model type** (Checkpoint, Diffusion model, LoRA, LyCORIS, VAE, Text encoder, ControlNet, Upscaler, Embedding …); **NSFW** . The filter bar has **every model type** and **NSFW** (unticked = NSFW cards hidden, remembered).
- 2.575.0: ✎→ **To prompt** on gallery pictures / videos / songs, Assets, References (pictures, videos, sounds) and in the viewer's details: the file's prompt with its seed, cfg and steps (an image: Basic Settings ▸ Image's steps / cfg; a video: Basic Settings' steps / cfg; a song: the Music docker's lyrics and seed). A note at the bottom says what was set.
- 2.575.0: **The Civitai sync in the status bar**: " Civitai 12/80" while Civitai info / Sync runs (a click opens the model manager), then "✓ Civitai synced: … found · … no match" for 30 s.
- 2.575.0: **Dockers come back as they were left**: a docker put into a ▣ docker keeps its place, its tab order and the shown tab, and its status (open / collapsed / hidden) over a restart; minimized floating panels stay minimized; extension dockers reopen open or closed as left; a layout change made just before closing is saved; a saved ⊞ docker config no longer overrides the restored layout while the app starts.
- 2.576.0: **Sync finds renamed Civitai models**: a model its file name does not find is looked up by its SHA-256 (the file's content - exact, whatever it is called). Reading a big file takes a while; the status bar says " Civitai 3/9 · reading 45%". Models that were "no match" before are asked again on the next Sync, once.
- 2.576.0: **To model… in the viewer**: sends the picture, video or song you are looking at to a model's files (model_info, with its prompt, seed, cfg and steps). The model it was made with is picked first; tick **Make it the model's thumbnail** (ticked for you when the model has none).
- 2.576.0: **Ctrl+↓ = the model's thumbnail**: in the viewer on one of a model's own pictures (or a Civitai example) it becomes the thumbnail at once; on any other picture the picker opens with the thumbnail box ticked. In the model manager's page, click a picture / example, then Ctrl+↓.
- 2.577.0: **Your own pose sheets**: the six built-in pose templates are gone. Save your pose sheets (PNG, JPG or WebP; sub-folders are fine) in the **pose_sheets** folder of the install folder. In the Character creator, **Pose sheet** (where the Pose dropdown was) opens their thumbnails: click one and ✓ **Use** (or double-click it); **No pose sheet** = a natural standing stance; **Open folder** shows the folder, ↻ **Refresh** reads it again after you save new ones. The sheet keeps your pose sheet's panel layout and the pose and camera angle in each panel, with your character in them. The pick is remembered. The folder is yours - it is never in a release zip or the repository.
- 2.578.0: **SolidCraft docker** - SolidCraft (open-source parametric 3D CAD, MIT OR Apache-2.0, solidcraft.io) runs inside the app in its own docker (the SolidCraft button in the status bar), all of it: sketches with constraints, extrude, revolve, sweep, loft, fillets, chamfers, shells, holes, threads, patterns, sheet metal, plastic parts, assemblies with joints and motion studies, parameters, STEP / IGES / STL / OBJ / 3MF / glTF. **Install** it once in the docker ( Install, about 20 MB from SolidCraft's GitHub releases) or Settings ▸ Add-ons ▸ SolidCraft; offline: download solidcraft-web-<version>.zip from its releases page and use **Install from a zip…**. After that it works offline; a newer SolidCraft shows **Update** in the bar. The bar connects it to the app: **Designs** opens the project's designs and parts (projects/<project>/solidcraft) or one from the computer; **Save to project** keeps the design there - after that SolidCraft's own Save (Ctrl+S) keeps the project's copy current; **→ Image editor** puts a picture of the model (transparent background, the **Size** you pick, **Edges** on or off) into the image editor at once - **Shift**+click for SolidCraft's own lit render (slower, the bar shows its progress); **View** picks the angle (Iso, Front … Bottom, or a Named View you saved in SolidCraft - the way to picture your own angle); **→ Timeline** adds the model as a 3D layer at the playhead (sent again, it updates); ✏ **Sketch → SolidCraft** turns the image editor's selected sketch layer into a SolidCraft sketch to extrude or revolve; **Export** saves STEP, STL, OBJ or 3MF into the project.

- 2.579.0: **The SolidCraft docker shows only when SolidCraft is installed** (its status-bar button too) - install it in Settings ▸ Add-ons ▸ SolidCraft ( **Install**, or **Install from a zip…** offline) and the docker appears. **Send** buttons in its bar: **Send to Image editor**, **Send to Timeline**, **Send to House builder** (the part as a piece on the current floor at its own size in metres, in the middle of the rooms - move, turn and stretch it; it is in the 3D view, shots and the house's .obj / .glb; sent again, the same piece updates), **Send to Blender** (only when Blender is found: Blender opens in its own window with the part in metres, Z up, saved as projects/<project>/blender/solidcraft/<name>.blend) and **Send to Unreal** (only when an Unreal project or editor is set: the part is imported as a Static Mesh into /Game/bitGen/SolidCraft and placed in the open level - sent again it is replaced where it stood; it needs the bitGen Bridge plugin **1.4.0** - Load UE project updates it, or unzip **bitgen-ue-bridge-1.4.0.zip** into the project's Plugins folder).
- 2.579.0: **Delete a model** in the Model manager - on a card or **Delete** on its page. A confirmation lists what goes: the model file (deleted from the disk for good - not the recycle bin), the files beside it with its name (preview pictures, .civitai.info, .bitgen.json, its .yaml …) and its model_info page, and warns which styles use it.
- 2.579.0: **Settings ▸ Dockers**: every docker - the main column's, the side dockers, the floating windows (Basic Settings, Model manager, House builder …) and every extension docker, including ones you add later - with where it is now and **↺ Reset**: back at its default place and size (out of a floating window or a ▣ docker, not maximized, shown and open, its first height / width; a window at its first place and size). **↺ Reset all** does every one.
- 2.580.0: **Model manager ▸ Model paths**: every group of paths in ComfyUI's **extra_model_paths.yaml** (the file it reads - shown at the top), each with its base_path, is_default and one row per path (folder type + path, ✓ the folder is there / ✗ it is not).

  – **New group (other_ui1)**: pick the base folder (another UI's install, a model drive …); the group is named other_ui1, other_ui2 … (the first free number) and filled with the model folders found under it (models/checkpoints, models/loras, models/vae … - an A1111 / Forge install's models/Stable-diffusion and models/Lora too).

  – **Change a path**: type in it, or to pick the folder (inside the base it is written relative to it); **+ path** adds a row, removes one; rename the group or tick is_default; **Save** writes that group (**↶** forgets the changes). Several paths for one folder type are written as a list.

  – **Delete group** removes the group from the file (the folders and models stay on the disk).

  – Only the group you save changes - every other group, comment and blank line of the file stays as it was; the previous file is kept as extra_model_paths.yaml.bak. If the file was changed elsewhere since the tab read it, the save is refused and the tab reads it again.

  – **Restart ComfyUI**: ComfyUI reads the file only when it starts - this stops the ComfyUI bitGen Studio started and starts it again (not running: starts it; started by someone else: left alone, and it says so).
- 2.581.0: **Sync and Civitai info keep a model's videos and animated pictures too** (a video model's examples are usually clips): its examples come in Civitai's order - videos (at 512 px, at most 60 MB each), GIFs and stills - and the card's thumbnail is the first one as it is, so a video thumbnail plays on the card (muted, looping) and on its page; the examples show the video playing, GIFs marked GIF, and the viewer opens a video as a video. Models synced before are fetched again by their Civitai version id on the next Sync. A video can be the card's thumbnail (✎ Edit card, Ctrl+↓ on a picked example or one of your files, To model…).
- 2.581.0: **The selected LoRAs' keywords go into what the LLM writes**: Enhance and the prompt chat tell the LLM the keywords (trigger words) of the selected LoRAs - Basic Settings' LoRA rows for the Generate mode, where the Model manager's ✓ picks land, and the Model manager's own picks - and Enhance puts a keyword the LLM left out in anyway (at the end; the console says which). The keywords are the card's (yours from ✎ Edit, else Civitai's trained words, else the LoRA file's most used tags), up to 5 per LoRA.
- 2.581.0: **Generate in the SolidCraft docker**: describe a part (and/or give a picture), and it comes into SolidCraft as its own editable features - sketches (lines, arcs, circles), extrudes, cuts, holes, fillets and chamfers in its timeline, each one you can change.

– Install it once: Settings ▸ Add-ons ▸ **CAD generate** - CadQuery (needed: it runs the part's code) and **cadrille** (ticked: an open 2B model that writes the part from text or a picture; best with an NVIDIA GPU; its weights are CC BY-NC 4.0 - non-commercial use - downloaded from Hugging Face on the install).

– **Engine**: Auto (cadrille when it is installed, else the app's local LLM), cadrille, or the local LLM (a picture is described by the vision model first). Code that fails to run goes back to the LLM with the error, up to 2 times. cadrille takes a description or a picture (a picture wins when both are given); it learned from clean renders of parts, so a render or drawing of the part works much better than a photo.

– **into the open design** off (the default): a new design; on: added to the open one.

– The rebuild is checked: SolidCraft's volume must be CadQuery's. A step it cannot rebuild yet (revolve, loft, sweep, shell, mirror …) or a rebuild that does not match = the part goes in as one solid (the STEP) instead, and it says why.

– The part's STEP + OBJ are in the project's solidcraft folder, its code in solidcraft/ai/. ✎ **The code**: edit it and ▶ **Run again**. Ctrl+Enter in the description generates.

- 2.582.0: **Fibo 2.0 in the edit tools** (Bria AI's 8B model; its weights are CC BY-NC 4.0 - non-commercial use only). Two image styles: **Fibo 2.0 Edit Turbo** edits a picture from an instruction in 4 steps, and **Fibo 2.0 Dev** makes pictures from text and edits them in 30 steps. Both are in the image editor's AI ▸ Edit (the selection's picture is `<image_1>`), and both take up to 4 reference pictures (`<image_1>`..`<image_4>`) - the reference dock's `<Picture n>` tags and "picture 2" in the prompt are written that way for you.

  – **Low VRAM**: the styles load the w4a8 ConvRot files (6.6 GB) with the int8 Qwen3-VL 4B text encoder - about an 8 GB card, ComfyUI moving the rest to RAM. GGUF Q4_0 / Q5_0 / Q8_0 work too: pick the .gguf as the style's Model in Settings ▸ Image (the loader follows the file; it needs the ComfyUI-GGUF node pack).

  – **Install**: Settings ▸ Add-ons ▸ **Fibo 2.0** - tick the files (Edit Turbo w4a8, the text encoder and the VAE are ticked; a GGUF installs ComfyUI-GGUF too). Fibo 2.0 needs ComfyUI from 21 Oct 2026 or later.

- 2.583.0: **Team ▸ the render farm** (2.589.0: an optional add-on - Settings ▸ Add-ons ▸ Team render farm) - team members open the same project and render on each other's PCs, with the owner's permission. Settings ▸ **Team** (after Remote GPU):

  – **The team folder** is a folder on the NAS every PC can open (`\\nas\bitgen-team` or a mapped drive). The leader picks it, types the team's name and their own name and presses **Create the team**; everyone else types their name and presses ⇥ **Join**. The leader sees the request and presses ✓ **Approve**; **Remove** takes someone out (their key stops working at once). ⇤ **Leave the team** on any PC.

  – **Daily keys**: the leader's bitGen writes every approved member a new key in the team folder each day (it does this by itself while it runs; ↻ **Issue today's keys** does it now). A key is valid until midnight and only works together with the private key that stays on the member's own PC - copying the key file gives nobody access. If the leader's bitGen does not run on a day, nobody gets that day's key (the farm waits for it).

  – **The same project**: **Use the team's projects folder** makes this PC open the projects in the team folder (restart bitGen); every member does this once.

  – **Share this PC for team renders** opens the render port (8312 by default) - only while bitGen runs and the switch is on, and only the render-farm calls are on it (the app itself stays on this PC). Same network: nothing else to set; over **Tailscale**, type this PC's Tailscale name or 100.x address in *This PC's address for the team*.

  – **Access** is the owner's: a member's **Ask for access** shows under *Asks for access* - **Unrestricted** (any time bitGen runs here), **from - to** (two dates and times; outside them the PC refuses the job) or **Deny**. *Access given* lists who may render here; ↺ **Revoke** takes it back.

  – **Render on** (the status bar): **This PC**, a team member's PC (✓ with your access and its time; Ask; greyed when it is offline or not sharing) or ⚡ **Spread** (each new render to the least busy of this PC and the PCs you may use). The menu also shows every render the team's PCs are doing, with its progress. Generation jobs go (pictures, videos, songs, graphs, swaps, upscales …);

installs, downloads, training, the movie export and the quick ffmpeg jobs always run here. A job on another PC shows in your queue as usual (its log comes back), and the finished file is in the shared project - it lands in your assets like any render. A job the other PC refuses (no access, outside its time, not sharing, a file outside the team's projects folder) fails with the reason in its log.

- 2.584.0: **Compare LLMs** (the prompt docker's menubar) - type a prompt and press : every ticked LLM answers it in turn (the one in the LLM dropdown first - it is loaded already; each of the others loads when its turn comes, so a round takes as long as loading them). Each reply shows in the Prompt chat under its LLM's name and time; press ✓ **Use this one** on the reply you like - it becomes the chat's answer (stored in the chat, read aloud, a song goes to the Music dock, an image / video fence sets the mode) and the others fold away (show / hide). ✗ **None of them** records that none was good; **Stop** skips the LLMs not asked yet. The replies use everything a normal chat turn does (the styles, the LoRA keywords, the reference dock, the conversation so far).

  – ▾ picks which LLMs take part (vision projectors are never in the list). With an external LLM endpoint set (Settings ▸ LLM) there is only one LLM, so is off.

  – shows the best LLM for each job - screenplay, music video, song, image prompt, video prompt, chat (the job is read from the prompt's words, the same ones the buttons add) or every job: how often each LLM was picked, how often it took part, its win %, its average time, how often it failed. **Use** makes that LLM the chat LLM. Below: every round with the request and every reply ( one, Clear all), **Export CSV** for a spreadsheet.

  – The record is kept in **llm_arena/** in the install folder (one file per round) - this PC's own, never in a zip.

  – If an old llama-server is still running on the LLM port, it would answer for every model; such a reply is refused and said ("the LLM port answered as …") instead of being recorded under the wrong name.

- 2.585.0: **train an LLM on your Compare LLMs picks** - the picks become a training set for the LoRA trainer's LLM fine-tune, which writes a new .gguf into the LLM folder.

  – Each round now keeps the **full prompt** the LLMs were sent (bitGen's instructions - styles, guides, LoRA keywords, references - the conversation so far and the request), so a model trained on it learns to answer the way bitGen asks. ▸ a round's details show it. Rounds from before 2.585.0 have only the request.

  – ▸ **Train an LLM on your picks** says what your decided rounds give - the replies you picked as **examples** and one **preference pair** (picked vs not picked) per reply you did not pick - for the job chosen at the top or every job. Pick the trainer's LLM job (or type a name for a new one), examples + pairs / only one of them, with or without bitGen's instructions, and **Send to the trainer**. Sending again adds only what is new. The longest example is said in tokens: the job's **Max length** must fit it (a longer one is left out of the run and said in its log - never cut, which would lose the answer).

  – In the trainer (an LLM job): **Job ▸ Learn from** - **Examples (SFT)**, the answers you want; **Preferences (DPO)**, **"this, not that" against the base model;** Preferences (ORPO)**, the same without a reference model (less VRAM). Preferences use a much smaller learning rate (set for you) and **Beta** (0.1 - higher keeps it closer to the base). **Dataset ▸ Preference pairs**: the count, From Compare LLMs, prefs.jsonl, Clear the pairs. ▶ Start counts the pairs for DPO / ORPO; the log shows how often the picked answer already wins.

  – A useful run needs a few hundred picks, ideally of one job (screenplays, say). Training starts from the base model's original (Hugging Face) files - a .gguf cannot be trained - and the result is a new .gguf. Check the licence of each model whose replies you train on: some do not allow their output to train other models.

- 2.585.0: **which LoRAs' keywords the LLM writes into prompts** ( Enhance and the prompt chat): with **Override style** on in Basic Settings, only the **temporary LoRAs** there (of the Generate mode - image or video); with it off, only the **selected style's LoRAs** (the image style for Image, the video style for Video and Chat). LoRAs picked in the Model manager no longer count by themselves.

- 2.586.0: **Settings ▸ Add-ons ▸ LLM** - the chat / writing LLMs in one dropdown: pick one and **Download** - the .gguf goes into the LLM folder (Settings ▸ LLM) and shows in the prompt docker's LLM dropdown and in Compare LLMs. ✓ marks the ones you have; **Delete it** removes the picked one (not the one running).
  - – ★ **Qwen3.8 27B** (Alibaba, August 2026, Apache 2.0) is the base we recommend for **your own checkpoint**: UD-Q4_K_XL (17.6 GB) runs on a 24 GB card, Q5_K_XL / Q8_0 for more quality. In the trainer its base model trains as a 4-bit QLoRA on a 32 GB card (Unsloth's 4-bit checkpoint; a 16-bit LoRA needs more than 36 GB).
  - – **Gemma 4 31B** (Google, Apache 2.0) - the other strong writer, the same class; **Gemma 4 12B** (QAT, 6.7 GB) - fast, the quick one to train; **Qwen3.5 9B**; and the setup wizard's Qwen3 4B / 8B / 14B.
  - – Compare the ones you download with Compare LLMs on your own jobs, then train the winner on your picks.
  - – Qwen3.8 and Gemma 4 need a recent llama.cpp - update it with miscget-llama.ps1 if a model will not load.
- 2.642.0: **Credits** - Settings ▸ **About** shows the version, "Produced and Developed by Tim Paul", "Programmer - Claude Opus 5.5" and the credits to everyone whose code, models, tools and ideas bitGen Studio uses; the same credits are the last section of this guide (and on its cover).
- 2.641.0: **Sketcher: cameras picked, moved and turned like objects** - no box round a picked camera; it shows X / Y / Z move arrows (drag the camera or an arrow), a double-click swaps them for the rotate rings, and clicking anything else picks that instead.
- 2.640.0: **Sketcher: each part's own properties, and profiles** - a clicked wall / floor / ceiling / skirting / cornice (view or outline) shows its own panel (a wall's length, height and inside colour); skirting, cornices, door frames, window frames and window sills take a profile from a picture dropdown, and ✎ Profiles… draws your own.
- 2.639.2: **Sketcher: the 3D view never goes black silently** - a bad number in a model (a corner, a light, a piece) no longer blacks the whole view: that piece is left out, the camera is put back, and a red note at the bottom of the view says what was wrong (a render error or a lost graphics context says so too).
- 2.639.1: **Sketcher fix** - docked in a narrow column the new outline took the 3D view's width (it showed black); there the outline now starts off and floats it over the view, and the view never gets narrower than 160 px.
- 2.639.0: **Sketcher: Outline docker** (rooms ▸ walls, floor, ceiling, skirting, cornice, doors, windows; hide / show; room groups), skirting + cornice, Alt+drag a wall freely, Shift+click = the whole room.
- 2.638.0: **SolidCraft maximized = the whole window** - fills bitGen's window between the title bar and the status bar and closes every other docker; (or Esc) puts the layout back exactly as it was (which dockers were open, which were folded, their sizes).
- 2.637.0: **Shift+right-click leaves Artist mode** - anywhere on screen, no context menu (Ctrl+Esc opens the Start menu on Windows; Ctrl+Esc and Ctrl+Shift+F still work).
- 2.636.0: **Ctrl+Alt+S opens Settings; the bitGen Default theme** - Ctrl+Alt+Shift+T (or bitGen Default in Settings ▸ Themes, or `?theme=default` in the address) puts bitGen's own look back - Dark, its accent, no element styles, UI size 100 %; ↶ The theme before undoes it. The built-in bitGen Default can't be overwritten or deleted.
- 2.635.0: **Assets: Project | Global | All** - project assets in `projects/<name>/Assets`, global ones in `projects/Assets`, a folder = a group; uploads go into Assets; right-click Move to Global / Move to Project.
- 2.634.0: **Setup in colour** - done green, installing light green, warnings orange, errors red; a quiet step says it is still working (and why it takes long) so setup never looks stalled - the setup window and the install scripts.
- 2.633.0: **Sketcher: rotate rings (yaw / pitch / roll) for cameras + furniture, roll, lens presets, focal length / field of view**.

- 2.632.0: **Sketcher: cameras picked inside rooms, moved, turned (R); Esc / double-click deselect everything; the Orbit cursor**.
- 2.631.0: **Sketcher: camera views, open doors / windows, auto roof + floor** - View ▾ lists the cameras (the view from one); a door / window's Open % + direction; the Room tool's Auto roof / Auto floor.
- 2.630.0: **The House builder is gone** - its last parts in the Sketcher ( people, File ▸ its saved houses as Sketcher models); SolidCraft sends to the Sketcher.
- 2.629.0: **Sketcher: materials, cameras, 360° locations, Furnish** - the House builder's materials with textures, cameras (look through, shot + depth + normal maps, a 360° Location), Furnish a room; the furniture exported.
- 2.628.0: **Sketcher: Furniture** - the House builder's furniture library and the project's 3D models placed in the Sketcher; maximized closes every other docker (⇲ Dock opens them again).
- 2.627.0: **The Sketcher's real photo** - a clean render + its depth map go to the edit model, the prompt led by "Turn this 3D render into a photorealistic photograph of a building ..." (it came back as a shaded sketch before).
- 2.626.0: **PushPull is the Sketcher** - with the prompt docker: Image + an edit model, "create a real photo of the model in view", Generate = a real photo in the Image assets; → Image editor / → Timeline send a Sketcher layer.
- 2.625.0: **Sketcher: faces, edges and corners edited** - a face's Extrude (+ / - a cut) and Twist, dragged like Blender, Ctrl+drag twists; edges moved, Length, Extrude edge, Fillet, Shift+click more, Ctrl+click the face's loop; a corner moved; doors and windows resized / moved by their grips, a window's Elevation; keeps the status bar.
- 2.624.0: **Sketcher: walls on a floor, sloped walls** - bitGen's theme colours; Offset from floor edge; drag one wall, the floor's snap regions, onto its edge; double-click a wall's top = a cut to drag up / down, a top edge's slope, Delete; Ceiling Flat / Follows the walls' slope; a roof that follows them with an Eaves width; double-click empty = Orbit; / ⇲ Dock and ✕ in its title bar.
- 2.623.0: **Edit theme mode: every button and its words** - double-click any words to change them, dropdown options, placeholders and tooltips, the floating tool panels, Alt+click to use the app without leaving the mode.
- 2.622.0: **ComfyUI found by itself** - an installed ComfyUI that Settings does not name yet is found, and its checkpoints and diffusion models are in the Model manager and Basic Settings' model lists (the video Model list had stayed empty - it read the list the wrong way; fixed). Settings ▸ ComfyUI ▸ Folder offers Use this folder.
- 2.621.0: **Speech & dialog in the SFX dock** - text typed, pasted or written by the LLM, read with emotion by OmniVoice or Ming-3.0 TTS in one voice or a voice per speaker, saved as .wav / .mp3 into the Audio assets with the date, time, description and text in the file's metadata.
- 2.620.0: **Sketcher builds** - rooms with walls, floors and ceilings that snap together and share a wall when dragged, doors and windows through any wall, roofs (gable, hip, shed, flat), stairs, floors, and lights (downlights, ceiling lights, pendants, chandeliers, spots, wall lights, floor and table lamps) with a night view; the docker maximizes to the whole window, has its own File menu and / buttons.
- 2.619.0: **Sketcher** - a new docker for quick 3D modelling: draw a shape, push / pull it into a solid (pockets, holes through, walls from an offset), exact sizes typed in, snapping to corners / edges / faces / the axes, groups, paint, undo; models kept in the project; sent on to the image editor, the timeline, the House builder, Blender and Unreal, or exported as .glb / .obj / .stl.
- 2.618.0: **A bridge layer deleted or hidden closes its bridge** - in the image editor: a Blender layer hidden or deleted closes the scene tools (no new layer is made) and the scene itself (the timeline's preview of it too); a 3D (Daz / Blender) layer ends its scene's Blender and drops what was waiting for Daz's live link; an Unreal / MetaHuman layer stops the Unreal View, clears its picture and hides it. In the timeline: an Unreal clip whose layer is hidden () or that is deleted closes its window. Shown again (or undone), the layer still has its picture - pick it to open its scene / view again.

- 2.617.0: **Text effects from a zip** - Presets ▾ Import PSD text effects or a zip… takes a zip of text effects (every PSD in it becomes a preset, the fonts in it are added to the studio) or several PSDs at once.
- 2.616.0: **Install with one file** - `install_all.bat` (Windows), `install_all.sh` (Linux) or `install_all.command` (macOS) on its own installs Git and Node.js when they are missing (Windows: Python too), clones the repository next to it and starts the studio (the first start installs the rest). Run it again any time to open the studio.
- 2.615.0: **Basic Settings follow the style** - each style remembers its own Basic Settings in misc/basic_settings.tmp. Changing the style anywhere (the prompt docker, Basic Settings' style card, a board …) first saves every Basic Settings field + the style's name for the style you are leaving, then puts back what you last had for the new one. The app starts on the last session's styles with their settings.
- 2.614.0: **Pick ▼ ranges, ✂ Cut cuts them; Ctrl taps while it plays always count** - a click on a ▼ picks its range (Ctrl / Shift + click: more) and ✂ Cut cuts the picked ones (none picked: all). Ctrl taps while the preview plays now count with ▶, the speed list or a ticked box focused, and while the preview docker's player plays a timeline clip.
- 2.613.0: **▼ Ranges with Ctrl while it plays, ✂ Cut all / Speed up, hover time, playback speed** - tap Ctrl while the preview plays to mark a range's start and again for its end (as many as you like, each its own colour, on the highlighted layer); drag a ▼ to move it (the preview shows that frame), right-click removes it. ✂ Cut all cuts every range; Speed up plays them 2× - 10× faster (fast-forward a render). The time under the pointer shows in a small box; the preview plays at 0.125× - 8×.
- 2.612.0: **A cut clip stays one clip / ✂ to new layer** - ✂ Cut and Del on frames join the parts before and after the cut into one continuous clip again (a video or sound: one new "-join" file; a picture: just shorter), one ↶ undoes it. The new "✂ to new layer" box puts the part after a cut (or a Ctrl+K split) on a new layer right above. The preview loads the next clip a second early - no black frame at a cut.
- 2.611.0: ▯ **Frame - click a frame, Del removes it** - the ▯ tool beside ▸ ⇤ ⇹ ⇆ ↔ on the timeline (or F over the layers): a click on a layer selects the one frame under the pointer on that layer, a drag several, Shift+click up to here, ← / → a frame on / back. Del / ⌫ cuts them out of that layer and closes the gap; ↶ puts them back.
- 2.610.0: **Morph on the timeline** - the Morph tab beside Properties (the timeline's layers panel): write Character 1 (what it starts as, e.g. "a monkey") and Character 2 (what it turns into, e.g. "a man"), pick Layer 1 (the clip it starts from - its LAST frame) and Layer 2 (the clip it ends on - its FIRST frame), the length (1 - 10 s). The prompt is written for you (edit it if you like - ↺ writes it again). Make the morph renders it with the video style picked in the toolbar from those two frames (as the canvas shows them), puts it on a new Morph layer between the two layers starting where layer 1's clip ends, and moves layer 2's clip to start where the morph ends. Its sound is off unless you tick "keep its sound". ↶ undoes it all. Works best with the two characters in a similar framing.
- 2.609.0: **Dock any floating docker in the image editor's panel column** - drag a floating docker by its title over the column where Layers is: an orange line shows where it goes (above / below each docker there, or at the end); let go = it is docked there. Works for a main docker floated with ⇱ (Assets, Gallery, References, Queue, Preview …), a ▣ docker, Basic Settings, LLM tokens, the Camera panel, the prompt docker and Pending. Docked, each has a slim bar: drag it to another place in the column or out of it (it floats again), ▾ folds it, ⇱ floats it, ⚙ (a ▣ docker) its menu; its bottom edge sizes it. Where each one is docked, the order, its height and fold are kept and come back at the next start; docked in the editor they hide and show with it.
- 2.608.0: **Font lists show each font in itself** - every font dropdown writes each font's name in that font (type to search as before), and the closed list shows the picked font in its own lettering.
- 2.608.0: **Fill a shape with text** - image editor: right-click a shape layer (or the Shape tool's bar, or Layer ▸ Fill Shape with Text…) and pick how: **Flow inside** (a text layer whose lines wrap inside the outline; Fit = the biggest size that fits), **Stretch to fill** (the letters bend and stretch to fill the outline - a heart, a circle, a star) or **Repeat as fill** (the shape's fill becomes rows of the text, at an

angle - it stays a shape). Flow / Stretch take a text preset and stay text you can type into. Timeline: a shape layer's ◆ Shape ▸ Text fill (rows), and a text layer's In a shape (Stretch to fill / Flow inside a shape layer; Place on it).

- 2.608.0: **5 more warp presets** - Shell Lower, Shell Upper, Fisheye, Twist and Wedge, next to Arc … Squeeze: in Shape / 3D…, Edit ▸ Transform ▸ Warp and the timeline's Warp ▸ Preset.
- 2.608.0: **A warp grid on text and shapes** - Warp Grid (the Type and Shape tools' bars, right-click, Edit ▸ Transform ▸ Warp): drag the grid's points or anywhere inside, pick a preset, Grid 3 x 3 / 4 x 4 / 5 x 5, split lines - Enter applies. The layer stays text (type into it - the warp follows) or a shape (change its colour - still warped); Layer ▸ Remove Warp Grid takes it off. Timeline: Warp ▸ Preset turns into a mesh you drag with (Shift+W).
- 2.607.0: **Text presets stay on through shapes and 3D** - a text with a preset (Gold, Chrome, a PSD text effect …) keeps it when you warp it, put it round a circle or along a path, make it vertical or 3D (image editor ▸ Shape / 3D…); the 3D sides take the preset's colour, darker (or the side colour you set). On the timeline a preset text now gets Text Animators and On a path too, and 3D text ( ▸ 3D text) has its own Preset ▾ - the preset's look is the front face, the sides its colour.
- 2.607.0: **New text starts with your preset** - on the timeline, with nothing selected Properties shows New text ▸ Preset; the T tool's next text starts with it (picking a preset on any text sets it too).
- 2.607.0: **Every font on your computer** - each font list (image editor Type tool, Properties, Character panel; timeline text, 3D text, captions; karaoke style) keeps the usual fonts at the top under "Common" and lists every font installed on this computer under "This computer (N)".
- 2.606.0: **A click on a text picks it and switches to the Move tool** - also with the Type tool in hand (it used to open the text for typing). **Double-click** a text to edit it - the caret goes where you double-clicked. Picking a layer in the Layers panel with a drawing or Type tool in hand also switches to the Move tool. The rotate / skew handles: the new Scale / ↻ Rotate / skew button in the Move tool's options bar, or double-click on one of the handles (double-clicking inside a text now edits it).
- 2.605.0: **Hover shows the Move tool's thin frame** - in the image editor and on the timeline's preview canvas, an object under the pointer (a text, a shape, a picture layer…) shows the same thin dashed frame the Move tool uses, not a thick outline - with the Move tool and also with the drawing tools (and the Type tools over a text). A **click** on an object with a drawing tool picks it and switches to the Move tool; a **drag** still draws a new one. A text is picked anywhere in its box, also between its letters.
- 2.605.0: **Fixed: a second shape lost** - drawing a shape while another shape was picked did nothing (an error); it now draws a new shape (the Ops buttons still combine shapes when you pick one).
- 2.604.0: **Image editor ▸ Save to Images** - pick the format beside (PNG, JPEG, WebP, JPEG XL, AVIF, GIF, TIFF, BMP, TGA). Saving first keeps a temp copy of everything visible, then flattens it (JPEG / BMP on white - not black) and saves it in that format into the project's Images (Assets) AND the Gallery (a format the Gallery does not list - WebP, JPEG XL, … - shows there as a PNG of the same picture). Your layers stay as they are.
- 2.604.0: **Skew fixed** - with the Move tool, double-click for the rotate handles and drag a side handle: that side slants and the opposite side stays put (it used to swing the other way). Alt slants round the centre. Text skews too and stays editable text.
- 2.604.0: **Right-click ▸ Rasterize Text** - on a text layer in the image editor and on a text on the timeline's preview canvas: the text becomes a picture (undo brings it back).
- 2.604.0: **No thick box round a picked object** - the image editor shows only the thin handle frame; the timeline canvas a thin dashed frame with small handles.
- 2.603.0: **Timeline: a range on one layer** - drag the red position marker to where the range starts, then Shift+click on a layer where it ends (on a clip or between them; Shift+drag lets the end follow the pointer). The range is drawn on that layer's row and the layer is highlighted. ✂ **Cut** then removes the whole range from that layer only - the other layers are untouched (with ripple the gap closes on that layer). A drag across the ruler is still a plain selection.

- 2.603.0: **Timeline undo** - ↶ / ↷ in the timeline's menu bar, Ctrl+Z / Ctrl+Shift+Z (or Ctrl+Y) with the pointer over the layers. Every edit is a step (a drag is one step); the selection is not.
- 2.603.0: **ComfyUI left running is restarted** - if a ComfyUI on this computer is already running when the app starts (left from before, or started by hand), the app ends it and starts it again itself, so its console, Restart and memory are the app's. Settings ▸ ComfyUI ▸ "Restart a ComfyUI left running when the app starts" (on).
- 2.602.0: **Image editor ▸ Type tool** - the dashed frame round the text you are typing now fits the letters exactly and grows with every key (centred text grows both ways). With the Type tool the pointer is the text I-beam over a text and the new-text cursor (an I-beam in a dotted box) elsewhere. A click on a text starts editing right where you clicked - between the two letters nearest the click - instead of selecting it all; a click inside the text you are typing moves the caret there. The text's box for the Move tool's handles, Align and clicking is now as wide as the letters (it was measured too small).
- 2.601.1: **Fixed: Ming-3.0 TTS ""mul_cuda" not implemented for 'BComplex32'"** - Ming runs its whole model in bfloat16, and the last step that turns its output into sound does maths with complex numbers, which PyTorch cannot do in bfloat16. bitGen now does that one step in full precision (float32), the rest stays as fast as before. Nothing to reinstall.
- 2.601.0: **Reinstall, and every install button says what it is doing** - an add-on, package or model that is already installed shows **Reinstall** (a downloaded model: **Download again**), and pressing it really fetches everything again instead of skipping what is "already there". The moment an install or download starts its button is disabled and a status right beside it says what is happening - the step it is on, a percentage, the seconds - then ✓ **installed** or ✗ **why**. Settings stays open while it runs. This covers Settings ▸ Add-ons, faster-whisper, OmniVoice, sd-cli, Comfy Kitchen, Sage / Spectrum / the node packs, the model catalog, Civitai downloads, the LoRA trainer, Viggle (native), the package upgrade, extensions from a folder, and in the dockers demucs (Stems), the AI matte, SAM 2, Select ▸ Subject and Segment Anything.
- 2.601.0: **Settings ▸ Audio ▸ voice clone: ▶ Play** (was "Play selection") - plays the selection when there is one, the whole clip when there is none; it turns into ■ Stop while it plays and a white line follows on the waveform. A click on the waveform (no drag) clears the selection.
- 2.601.0: **Fixed: Ming-3.0 TTS "TorchCodec is required for load_with_torchcodec"** - a new torchaudio hands audio reading to a separate package (TorchCodec) that also needs FFmpeg's libraries. bitGen now reads and writes the voice clips for Ming-3.0 TTS (and OmniVoice) itself, so nothing needs reinstalling.
- 2.600.1: **Fixed: "transcription failed: open() got an unexpected keyword argument 'metadata_errors'"** - when a voice clone's transcript (or any faster-whisper transcription) was made. A new version of PyAV (the video / audio reader faster-whisper uses) dropped an option faster-whisper still passes. bitGen now reads the audio itself and hands faster-whisper the sound directly, so it works whichever PyAV is installed - nothing to reinstall. A new install of faster-whisper also keeps a PyAV that still has the option.
- 2.600.0: **Social media in Basic Settings ▸ Format** - for quick access, without the timeline's Export. The Format dropdown has a **Social media** group: **Reels / Stories 9:16**, **Facebook feed 4:5**, **Square 1:1**, **Landscape 16:9** and **the render's own shape**.
  - Picking one sets **Aspect** to match, so the model renders that shape (the feed's 4:5 renders 3:4 and is cut to 4:5). The line under Format says what will happen.
  - When the render finishes, and before it lands in the gallery and assets, the MP4 is made ready for the sites with the same settings as **Export ▸ MP4 · Social media**: H.264, AAC sound at 48 kHz stereo (a silent track if it has none), a steady frame rate, faststart, at most 1080 on the short side. The job's log says "ready for Facebook / Instagram / TikTok", or what is wrong. If it cannot be converted, the plain MP4 is kept and the log says why.
  - Works for MiniMax H3, Wan and LTX renders and the music video.
- 2.599.0: ↺ **Reset project shows a lock screen.** After you confirm, a cover over the whole window says **"Resetting Project..."** - a spinning ring, the dots running, the step it is on (stopping jobs, deleting and creating the folder again, reopening) and the seconds. Nothing behind it can be

clicked or typed into. It stays through the page reload and goes only when the empty project is open (✓ **Project reset**). If the reset is refused, the cover goes and the reason is shown.

- 2.598.0: **The seed has a Random / Fixed toggle** - in Basic Settings (video and image) and in every style editor (image, video, music).

  – **Random**: every render gets a new seed (the number box is greyed). **Fixed**: every render uses the number beside it - the same picture again with the same settings. Typing a number, or ♻ (the last seed used), makes it Fixed; switching back to Random keeps the number for next time.

  – **In a style**: Fixed means that style always renders with its own seed. Which seed a render uses: Basic Settings' Fixed seed first; with **Override style** on, Basic Settings' Random stays random; otherwise a style's Fixed seed; otherwise a random one. Styles saved before have Random (their old seed is not used, as before).

  – The image settings' seed is sent while Override style is on.
- 2.598.0: **The Model manager finds the models and LoRAs the running ComfyUI has**, also when they are not in the ComfyUI folder set in Settings ▸ ComfyUI (the ComfyUI Desktop app keeps them in its own folder, or a yaml is given on ComfyUI's command line). It asks ComfyUI for its model folders and for the names in its dropdowns; a model ComfyUI lists whose file this computer cannot open still gets a card (its size says so). Press ↻ in the manager after starting ComfyUI.
- 2.597.0: **MP4 · Social media** in the timeline's **Export** - for Facebook, Instagram and TikTok. Pick it as a format, or **a pack… ▸ social media** for four at once: **9:16** (Reels / Stories, a blurred fill), **4:5** (the Facebook feed), **1:1** and **16:9**, each 1080 on the short side.

  – It is made the way the sites want it: H.264 (High, 8-bit), AAC sound at 48 kHz stereo, a steady frame rate (a movie above 60 fps comes out at 30), the index at the front of the file (faststart), no timecode track, at most 1080 on the short side, with a bitrate ceiling so files stay a sensible size. A movie with no sound gets a silent track (some uploaders refuse a video without one).

  – After it is made, the file is checked and the log says "ready for Facebook / Instagram / TikTok" - or which point is wrong. A 9:16 longer than 90 seconds gets a note: it may post as a plain video instead of a Reel.

  – Why other files were refused: AVI (an old video codec with uncompressed sound) is not for social media; the 10-bit, H.265 and AV1 MP4s are for editing and newer players; and the plain MP4 · H.264 export adds a timecode track when the timeline has a start timecode. Use MP4 · Social media for anything you upload.
- 2.596.0: **Update llama.cpp** in **Settings ▸ LLM**. The line under the buttons says which llama.cpp you have and whether a newer build is out ("llama.cpp b10456 · the newest is b10601 - Update available").

  – **Update llama.cpp** stops the LLM server and the vision model, then puts the newest build over the engine folder set above (Windows: the CUDA build your driver supports). Your models and settings stay. Its progress shows in the small log right there and the Settings window stays open. **⬇ Install engine** shows instead while none is installed.

  – Every button in the LLM tab shows what it is doing while it does it: **▶ Start server** says "Starting the server…", then "Loading <the model>…" until the model is ready, then "✓ Model loaded"; **■ Stop**, **↻ Rescan**, **Scan folder** and Settings' **Save** say "Stopping / Scanning / Saving…" and then ✓ - or ✗ with the reason.
- 2.595.0: **WeVisOne-VL** (Tencent, built on Qwen3-VL) as a vision model. **Settings ▸ Add-ons ▸ WeVisOne-VL** has a dropdown: **★ 4B Q4_K_M** (recommended), 4B Q6_K, 4B Q8_0, 2B Q8_0 and 2B Q4_K_M - each with its projector.

  – It downloads into **your vision models folder** (the one set in Settings ▸ LLM; without one, the LLM folder's vision subfolder), in its own WeVisOne-VL-4B or WeVisOne-VL-2B folder, so it pairs with the right projector.

  – Then pick it in the prompt docker's vision dropdown: pictures in the prompt are read and described for the LLM. It is good at text in pictures, counting and saying where things are.

  – It needs a recent llama.cpp (miscget-llama.ps1). Its segmentation and matting are not part of the GGUF files - in bitGen it reads and describes pictures.

- 2.594.0: **Convert to 3D from the right-click menu.** Right-click a picture in the **Gallery**, **Assets** or **References**, or the **image editor's canvas** (it adds Convert Picture to 3D… / Convert Layer to 3D… to its menu; the Layers panel and the Layer menu have Convert Layer to 3D… too).

  – Pick the engine: **Hunyuan3D 2.1** (the shape, quick) or **TRELLIS.2** (shape + texture, slower). Both run in ComfyUI, as the buttons do.

  – Pick where the model goes: **Image editor** (a 3D layer - Blender puts the model in a lit scene with a camera framed on it; orbit it, render it and generate from it in the 3D tab - needs Blender), **SolidCraft docker** (opens as a new design) or **Just save it** (the project's models3d/ folder).

  – The job runs in the queue; when it is done the model opens where you said. A References or editor picture is kept in the project's images first.
- 2.594.0: **Ming-3.0 TTS** - a second speech engine. Install it in **Settings ▸ Add-ons ▸ Ming-3.0 TTS** (its code, its own Python and the 0.5B model, in the ming-tts folder), then pick it in **Settings ▸ Audio ▸ Speech engine**.

  – A cloned voice needs its clip **and** the exact transcript; a designed voice (a description) uses Ming's voice design. The chat , the Speech dock and Test voice all use the picked engine.

  – Its authors test it on Linux with CUDA 12.4. On Windows it is new ground: an RTX 50-series gets the CUDA 12.8 build of PyTorch. Without the text normaliser (pynini, usually missing on Windows) write numbers as words.
- 2.594.0: **Bark 3.0 speech-to-text** (Underdog). Install it in **Settings ▸ Add-ons ▸ Bark 3.0 speech-to-text**, then pick it in **Settings ▸ Audio ▸ Speech-to-text engine**.

  – It is **English only** and gives **no word times**, so it does the plain transcripts: the Transcribe button, voice clone transcripts, the phone remote and the voice chat. Lyrics, captions, word times and other languages always use faster-whisper (keep it installed for those).

  – Long files are cut into pieces of up to 30 seconds at quiet moments, so a transcript still has rough times.

  – License CC-BY-4.0 (its NOTICE file stays beside the model).
- 2.593.0: **Face fix and ControlNet are add-ons now.** Switch them on in **Settings ▸ General ▸ Add-ons in the studio** (both start off).

  – **Off**: Basic Settings hides the Face fix / ControlNet section (ControlNet also hides its Settings tab), Settings ▸ Add-ons hides its card, and no render uses it.

  – **On**: they show again, and bitGen checks everything the add-on needs and downloads whatever is missing into the right ComfyUI folder by itself - right away, and again every time it starts while the add-on is on. Settings ▸ Add-ons shows the progress.

  – **Face fix** needs the ComfyUI-Impact-Pack and ComfyUI-Impact-Subpack node packs and the face detector face_yolov8m.pt (models/ultralytics/bbox).

  – **ControlNet** needs comfyui_controlnet_aux, its four preprocessors' models (DWPose, PiDiNet, Lineart, Depth Anything V2 - in custom_nodes/comfyui_controlnet_aux/ckpts) and the SDXL ControlNets (xinsir Union ProMax for every type, plus OpenPose, Scribble and Depth - in models/controlnet, about 10 GB). They are for an SDXL / Pony / Illustrious second model.

  – Each card in **Settings ▸ Add-ons** lists every download link (the GitHub node packs and the Hugging Face files, with the folder each one goes in), so you can also fetch them yourself.

  – After a node pack is added, restart ComfyUI once.
- 2.592.0: **Two characters, each with their own LoRA, in one picture** (from Winnougan's Nougan Nodes - Settings ▸ Add-ons ▸ **Nougan Nodes** installs it into ComfyUI; restart ComfyUI after). In the image editor's AI panel ▸ Zones ▸ ▦ **Regional prompt**, every box line has a button: pick the character's LoRA from ComfyUI's loras and its strength. Each LoRA works only inside its own box(es), so two people keep their own faces instead of blending into one; the scene's words still cover the whole picture, and boxes without a work as before.

  – Two different character LoRAs at most per picture (a third is refused before anything renders). Two boxes may use the same LoRA.

  – Best on FLUX.2 / Krea 2 / Qwen Image styles, with LoRAs trained for that model. On Qwen Image **Edit** the picture stays the model's own input: the LoRAs keep to their boxes and the boxes' words become area prompts.

- 2.592.0: **Timed lines in an LTX prompt (Prompt Relay)** - give each stretch of an LTX 2.3 / 2.5 clip its own words in ONE render. Lines without a time are about the whole clip; a line that starts with a time is about that stretch:

a red fox in the snow, cinematic [0-2s] the fox sniffs the ground [2-4s] the fox looks up at the camera [4s] it runs off to the left

- Each line runs until the next one starts (the first from 0 s, the last to the end of the clip). Times are seconds: `[2s]`, `[2-4s]`, `[2.5 - 4 s]`, `[2 to 4]`.
- beside the LTX mode in the prompt docker adds the next line (2 s each). It works the same in a scene on the StoryBoard and in the timeline's AI clip.
- Needs Settings ▸ Add-ons ▸ **Nougan Nodes** (Kijai's ComfyUI-PromptRelay works too). Without it the clip renders all the lines as one prompt, and the job's log says so. The timing is set in the first pass; the template's second (detail) pass keeps the whole-clip words.
- 2.591.3: **GitHub's tests are green again.** Git on Windows can store .bat files with Linux line endings, and a new test read them as they were checked out and failed. A .gitattributes file now makes every .bat / .cmd check out with Windows line endings, and inside a git checkout the test checks that rule instead of the bytes.
- 2.591.2: **push-to-github.bat is back in the app folder** (beside start.bat) and it is **never in the repository**: GitHub does not get a copy (it is ignored and left out of the repo zip). It comes with the flat zip. Dropping the repo zip on it no longer deletes it from the folder. A copy left in misc by 2.591.0 / 2.591.1 moves back up by itself the next time bitGen starts.
- 2.591.1: **GitHub's tests after the misc move.** A repository updated by unzipping over it (or by an upload that only adds files) still had the old root copies, and GitHub's tests stopped on them. Now those copies are not an error, and **push-to-github.bat** removes them before it commits, so GitHub gets the new layout.
- 2.591.0: **A tidy app folder.** The bitGen Studio folder now shows only **start.bat** (plus package.json / package-lock.json, which npm needs beside node_modules, and README.md / LICENSE for the GitHub page). Everything else that sat beside them - server.js, the Python workers, default.settings, quick_prompts.json, requirements.txt, the setup scripts (get-comfy.ps1, get-llama.ps1, get-sd-cli.ps1, get-yue2.ps1, get-qwen3vl.ps1, get-electron.ps1, download-models.ps1), clear-comfy.bat, reset-layout.bat and the notes - is in **misc**.
- Start as before: double-click **start.bat**.
- Updating from a zip over the old folder: the old copies left in the folder are tidied away by themselves the first time bitGen starts (your own quick prompts are kept - they move into misc).
- push-to-github.bat: (2.591.2: back in the app folder, beside start.bat, and never in the repo.)
- The folders and files bitGen makes while it runs (projects, styles, models, custom.settings, the layout files …) stay where they were.
- 2.590.0: **Artist mode** is the new name of the full-screen canvas (2.588.0's ⬚ focus mode): a labelled **Artist mode** button right after the image editor's menus (File … Help), View ▸ Artist Mode, Ctrl+Shift+F. Only the canvas shows; Ctrl+P colours, Ctrl+B brushes, Ctrl+Esc back. The editor's menu bar now wraps onto a second line when the editor is narrow, so no button is cut off any more.
- 2.590.0: **Every tab of the image editor is a docker.** Drag a tab (Layers, Color, AI, Unreal, Brush …) by its name:
- **onto another docker** (its tabs or its content, in the panel column or floating) - it becomes a **tab** of it (the docker lights up orange);
- **onto the panel column at the top or bottom edge of a docker** (or below the last) - a docker of its own there (an orange line shows where);
- **anywhere else in the editor** - it **floats**: drag it by the empty part of its tab strip, size it by its corner, ⇲ puts it in the panel column, ✕ hides it.

- at the start of a docker's tabs drags the WHOLE docker the same way (onto another = all its tabs join it).
- A click on a tab still just opens it. Where every tab is, is kept. **Window ▸ Show All Dockers** shows the hidden ones, **Window ▸ Reset Docker Tabs** puts every tab back where it started.
- 2.590.0: **Unreal View** - what the selected Unreal / MetaHuman layer's camera sees in Unreal, live (a few frames a second):
- **Image editor**: a floating docker that opens when you pick an Unreal / MetaHuman layer (☑ show it when an Unreal layer is selected) and follows the layer's camera as the camera tool, the Unreal tab, the lens and the lights change it. Picking another layer stops it. It is a tab like the others - drag it onto a docker to keep it there.
- **Timeline**: a window over the preview row that opens when you pick an Unreal clip (UNREAL ▸ View ▸ Unreal View shows / hides it): the clip at the **playhead** - an Unreal camera between its keys, a MetaHuman in its pose, a Level Sequence at that frame (Sequencer opens it there).
- Its bar: ● live · frames a second, the size (S / M / L - smaller is faster), , and ⚡ **Keep Unreal fast**.
- **Do you have to keep Unreal open?** The Unreal Editor must be RUNNING with your project open (the bitGen Bridge lives inside it) - but it does not have to be in front or on screen: minimize it or keep it behind bitGen. By default Unreal slows to a few frames a second when it is not the window in front; ⚡ **Keep Unreal fast** turns that off (Editor Preferences ▸ General ▸ Performance ▸ Use Less CPU when in Background), so stills, renders and the live view stay quick.
- Needs the **bitGen Bridge plugin 1.5.0** - Load UE project updates it (the 1.4.0 plugin shows the view more slowly, and not for sequence clips).
- 2.589.0: **The Team render farm is now an optional add-on** (it is no longer part of bitGen). It comes as its own zip, **bitgen-ext-teamdock-v<version>.zip** - the install, repo and flat zips do not carry it. ⚠ **It may trigger virus checkers**: it makes signing keys, listens for the team's PCs on a network port and writes to the team folder every 15 s, which Malwarebytes has flagged as ransomware. Install it only on the PCs that render for each other:
- **Settings ▸ Add-ons ▸ Team render farm ▸ Install from a zip…** (pick the zip), or put the zip in the app folder or Downloads and press **Install**. **Restart bitGen** - Settings ▸ Team and the status bar's Render on appear.
- **Remove** takes it out again (restart). This PC's team identity and keys stay in the app's team/ folder - delete that folder to forget the team. If your antivirus stops it, allow bitGen's folder or remove the add-on.
- Without it every job renders on this PC; a projects folder already pointed at the team's NAS folder keeps working.
- 2.588.0: ⚡ **Live generation in the image editor** (Krita's live mode) - ⚡ in the editor's menu bar (beside ) or View ▸ ⚡ Live Generation opens the ⚡ **Live** docker. Paint: every change (a stroke, an undo, a layer shown / hidden or added, the prompt, a setting) is rendered again a moment later - the whole picture as a Refine at the live strength.
- **One render at a time**; changes made while it renders are rendered next (the newest change wins - a waiting live render is dropped when a newer one comes). The model stays loaded between live renders (no VRAM clear) and live renders go to the front of the queue; they never show in the queue docker, the gallery or the assets.
- The docker: the result (hold it = full size on the canvas), the **style** (a fast one feels live: turbo / lightning / LCM / FLUX schnell / Z-Image Turbo at 4-8 steps), **strength** (30-50 % keeps your drawing), **steps** (0 = the style's own), **size** (MP - smaller is faster), **seed** (the same seed = the result only changes where you paint; a new one), ▣ **on canvas** (the result over the picture with a mix), pause, ↻ render now, ✔ **Apply as layer** (one undo step), ✕ live off.
- The prompt is the AI panel's box, or the main prompt box when that is empty.

- 2.588.0: ⬚ **Focus mode in the image editor** (2.590.0: called Artist mode) - ⬚ in the menu bar (or View ▸ Focus Mode, Ctrl+Shift+F): only the canvas, full screen and frameless - bitGen's bars and the editor's menus, tools, panels, rulers and dockers are hidden. Painting, [ ], zoom, Space-pan and undo work as always.
- **Ctrl+P** - the colour palette at the pointer: a saturation / brightness square and a hue strip (drag), the foreground / background colours (⇄ swaps), the hex value, the palette's chips and your recent colours - left click = foreground, right click = background. Ctrl+P again, Esc or a click outside closes it.
- **Ctrl+B** - the brushes at the pointer: every brush preset (click = paint with it) + size, opacity and flow.
- **Ctrl+Esc** - back to normal (Ctrl+Shift+F too - some Windows keyboards keep Ctrl+Esc for the Start menu). The browser's own Esc only leaves the browser's full screen; the canvas stays frameless until Ctrl+Esc.
- **Shift+right-click** (2.637.0) - back to normal too, anywhere on screen (Windows uses Ctrl+Esc for its Start menu); no context menu opens.
- 2.588.0: **docker ▸ RefMods** - the top of the LoRA & fine-tune trainer docker switches between Training and RefMods: MiniMax H3 reference mods (no training) kept in the app's **refmod/<name>/** folder, so **every project** uses them.
- **New RefMod**, then its **type**: Character reference · Location · Vehicle · Object · Prop · Flora · Animal, and a short description.
- **Media…** (or drop files): pictures go into images/, videos into videos/, sounds into audio/ - each with its caption box (a picture.txt uploaded next to a picture is its caption) and ✕.
- **Autocaption** - the vision model writes the empty captions ( all = every one again); a video's caption comes from one of its frames; sounds keep the caption you type.
- **Extract RefMod** - a queue job through ComfyUI (the ComfyUI-MiniMaxH3Mod pack): the pictures, then frames spread over each video (16 in all) -> <mod>.safetensors, kept in the RefMod's folder (and copied back into ComfyUI's models/refmods whenever a render needs it). Sounds stay with the dataset - the RefMod node takes pictures.
- **Use in the prompt** puts **@name** in the prompt box: a MiniMax H3 render (References / First-last frame) loads the mod before the sampler; the @ is taken out of the words the model reads.
- 2.588.0: **Settings ▸ Add-ons ▸ SolarRenderer** - render a STRUCTURE video (grey boxes, a semantic map, skeletons, depth, normals, a body mesh, a sketch) plus an optional first frame and a six-part prompt into the finished clip in 4 steps (Enderfga's control + four-step LoRAs on MiniMax H3; a causal pair for long clips). The add-on puts the SolarRenderer node pack into ComfyUI's custom_nodes and downloads the LoRAs you tick; it renders on MiniMax H3's ref2va model, text encoder and VAE (Settings ▸ Setup). Then **Settings ▸ ComfyUI ▸ Graphs ▸ ☀ SolarRenderer** imports the pack's workflows through Import & check (inputs counted, missing files said, a test run, saved when it works). The weights carry the MiniMax H3 Community License - the EU, the UK, South Korea and the US are excluded territories.
- 2.587.0: **Settings ▸ ComfyUI ▸ Graphs ▸ Import & check** - bring in any ComfyUI workflow (a saved workflow or an API export) and bitGen checks it, draws it, test-runs it and keeps it when it works:
- **The inputs it takes** - pictures · videos · sounds (its Load Image / Load Video / Load Audio nodes); the reference dock fills them in order, and a loader with nothing in the dock is bypassed for that render.
- **The output** - a Preview node is made a Save node (a preview writes no file), a video combine that does not save is turned on; a workflow that saves nothing is refused.
- **Missing nodes** (ComfyUI does not have them - install the node pack, restart ComfyUI, import again) and **missing model files** (a loader names a file ComfyUI does not list) are reported. A saved (UI) workflow needs ComfyUI running to be read.

- **The controls it gets**, already wired: Prompt (empty = the prompt box), Negative (empty = the negative prompt), Seed (bitGen's), Steps, CFG, Width / Height, Length - shown in Basic Settings when the graph is picked.
- **The graph is drawn** below: every node and link, the inputs, the output, missing nodes and model files coloured; the mouse wheel zooms, dragging pans, Fit shows it all. A workflow loaded in the tab (↻ Load, File, a graph picked) shows its inputs and its graph the same way.
- ▶ **Test run** queues it once through ComfyUI with a test picture / sound / video in every input. **It worked** = it is saved into comfy_workflows/ and as a graph (picked in the tab - Generate ▸ ⚙ Graph runs it; the test picture is in the gallery). **It failed** = ComfyUI's errors are listed and nothing is saved. A workflow that needs a real face or a particular picture may fail on the test pattern - add it by hand with File then.
- 2.587.0: **Settings ▸ Dockers ▸** beside each docker's name turns it **off**: the docker and its status-bar button are hidden (so it cannot be opened by accident) - shows it is off, a click brings both back. Floating windows too.
- 2.587.0: **Settings ▸ Dockers ▸ Layouts** - a layout is the whole docker arrangement (where each docker is, its size, shown / hidden / off, the docker configs, the floating windows, the workspaces) + the theme: **Save layout** (layouts/<name>.json in the install folder), **↺ Apply** (the page reloads into it), **Export**, **Import**, ×. **★ Save as the default** writes layouts/default.json and themes/default.json - copy both into the repo: a fresh install starts with that layout, and a browser that never picked a theme takes that theme. (Themes keep their own Save / Export / Import in Settings ▸ Themes - themes/<name>.json.)
- 2.581.0 fix: **Designs ▸ open and Open from the computer** in the SolidCraft docker opened nothing (SolidCraft reads its file storage only when it starts) - a design or part now goes in as if dropped on it.
- 2.574.0: **step n of total for every generation** - pictures through ComfyUI now report their sampler steps live (they only said "rendering… Ns" before), sd-cli pictures and videos too; and every place that shows a running generation says it: the status bar (step n/total), the queue, the Console beside Cancel, the Song tab and the Music docker (they showed "[object Object]"), the image editor's result tiles and Pending cards, From the picture, the 3D / Unreal real pictures, the timeline's fill, AI take, camera depth and karaoke overlay, the StoryBoard (grid cards, the scene picker, upscaling, ✎ First frame, storyboard pictures, the environment / character creators, sheet takes, RefMod extraction), the swap dialog (takes and first frames), VR world, the style doctor and the house builder.

The StoryBoard (the docker under the timeline with the scenes) is called the StoryBoard everywhere - its title, its statusbar button, Docker configs, the messages - and collapsing it keeps the name (2.545.0).

**Dialogs and message boxes open in the middle of the screen**. Move one by its title and it opens where you left it next time (kept in **dialog_layout.cfg** in the install folder, by the dialog's name); if the window has become smaller it is pulled back on screen. Delete the file to have them all in the middle again.

**Tools & Properties stays inside the timeline docker**: over its preview canvas row (so the tracks and the menu bar stay free; under the menu bar when the preview row is hidden) - dragged, sized or when the docker changes size it stays within it - never outside it (a small docker makes it smaller, its contents scroll) - and it hides while the timeline docker is collapsed.

**Shift+Del** deletes the selected layer in the image editor.

## Generate fill in a shape or a mask, the pattern library (2.437.0)

**Generate Fill in Shape…** (Layer menu, the layer's right-click menu, or fill in shape in Properties): generates inside the picked layer's outline - a shape, a text, a pixel layer's content, a smart object (or its vector mask's path). Type what should fill it (empty = the prompt docker's prompt) and how many results; the AI panel generates, click a result to compare, ✔ **Apply** (Enter) puts it on a NEW layer right above the shape, **clipped** to it (↳) - the shape stays a live shape, the fill can be moved, masked or generated again (a second fill goes above the first). **Generate Fill in Mask…** does the same inside a layer's mask (white = where): the result gets a copy of that mask. One undo step each.

**The pattern library** - patterns/<name>.png in the install folder, shared by every project (copy .png files in to share them). **Edit ▸ Define Pattern…** makes one from the selection's box of the picture as it looks (or the whole picture). **Edit ▸ Pattern Library…** shows them: ▦ = a new Pattern fill layer, × = delete, Import PNG…, Define Pattern…. **Layer ▸ New Fill Layer ▸ Pattern…** is a live fill layer (Properties: the pattern, Scale %, an offset); **Edit ▸ Fill… ▸ Contents: Pattern** fills the selection with one; **Layer Style ▸ Pattern Overlay** lists them as user:<name> beside the built-in patterns. A .bgi keeps the patterns it uses inside and adds them to the library where it is opened.

## Project files: .bgi, .bgv, .bgp (2.436.0)

bitGen has its own files now - a picture, a video edit and a whole project, each kept exactly as it is so it opens again ready to go on working.

**.bgi - the image editor's project** (File ▸ **Save Project (.bgi)** Alt+Ctrl+S, **Save Project As (.bgi)…**, **Open Project (.bgi)…**, **Open Project from Project…**; Open… / Ctrl+O and a .bgi dropped on the editor open one too). Everything stays editable: layers and groups, masks, text / shape / fill / adjustment layers, layer styles, blend modes, locks and labels, smart objects with their contents, their smart filters and filter masks (liquify included), paths, alpha channels, the selection and layer comps. The undo history starts fresh. It is a zip: doc.xml (the document as XML), preview.png (the picture) and each layer / mask as a PNG - any unzip opens it. Kept in the project's **bgi** folder (tick "also download it" for a copy); Save Project saves to the same file again with no questions, the first time it asks for a name.

**.bgv - the video project** ( on the timeline's toolbar). **Save** writes the timeline open now - every layer, clip, keyframe, effect, caption, marker and setting - as XML, with the nested timelines its nest clips use and a list of the media it plays (and whether each was there). Kept in the project's **bgv** folder (+ a download when asked). **Open a .bgv** (from the computer or the project's list) shows what is in it first - clips, layers, nested timelines, media this project does not have - then **Open it** makes it a named timeline of this project and switches to it. Nested timelines are added when the project has none of that name (yours are never written over). A clip whose file the project lacks stays on the timeline and plays once the file is added to the assets.

**.bgp - the whole project** ( in the menu bar, beside ). XML: the project's state, timelines, chats and settings readable; the media as base64. **Self-contained** puts everything inside, the media too - one file to move the project to another computer. **Manifest only** keeps the project's files and lists its media where they are on this computer - small, for a backup of the work. The dialog shows what each will weigh; the caches and previews bitGen re-makes are left out unless ticked (the recycle bin always). **Save…** asks where (the Save As dialog). **Open a .bgp…** makes it a NEW project (never over an existing one; the name is yours to change) - **Open it now** switches to it. Media a manifest lists that are not on this computer are named. Both ways stream, so a project of gigabytes is fine.

## Saved themes and PDF fonts (2.435.0)

**Settings ▸ Themes ▸ Customize**: a colour for each part of the theme (background, panels, raised panels, lines, text, dim text, OK green, error red, hover, canvas, selected) - the app (and the image editor) change at once; a changed one is marked; ↺ **The theme's colours** undoes them.

**Saved themes**: type a name, **Save theme** - it is written to **themes<name>.json** in the install folder (the colours, the accent, the UI size, the theme it started from) and shows as a card under it. A click on a card loads it, × deletes the file. **Export** downloads the theme as a .json, **Import** uses one

(then Save theme keeps it). Copy .json files into the themes folder to share them between computers.

**PDF ▸ Save PDF… / Save as New PDF…** (the image editor's Pages strip, or File): the Save dialog has **Embed fonts** (on by default, kept): each line of type is written as real text in its own font, embedded in the PDF with only the letters it uses. The font file comes from this computer's fonts (Windows, macOS, Linux font folders) or the install's **fonts** folder (drop a .ttf / .otf there). Any alphabet stays real text. A font that is not on this computer, or that lacks a letter, falls back to the PDF's standard fonts (Latin letters) or into the page's picture, as before. Off = the standard fonts only.

## Themes and the UI size (2.432.0)

**Settings ▸ Themes**:

- **Theme**: Dark (bitGen's own), Darker (OLED black), Slate (cool blue-grey), Light, High contrast. The whole app changes - the dockers, the dialogs, the image editor (its bitGen theme is built from the same colours; Window ▸ Theme in the editor still picks Pro / Studio / Classic for it alone).
- **Accent colour**: any colour for the buttons, the lit tabs and the sliders instead of the theme's own; Reset = the theme's.
- **UI size**: one slider for every font and every panel together, 60 % to 175 % (it moved here from General; the slider in the left dock's corner is the same one).

The theme, the accent and the size are kept in this browser and are on the page before it paints, so a light theme never flashes dark.

## PDFs: the guide and the brochure (2.392.0)

`docs/bitGen-Studio-Guide.pdf` is this guide plus a one-page view of every shortcut key. `docs/bitGen-Studio-Brochure.pdf` is a 3-page brochure for bitGen Studio. Both use the studio's dark theme.

## 3D text and 3D models on the timeline canvas

- (under **T** in the canvas toolbar) adds **3D text** or a **3D model** (.fbx or .obj — choose an OBJ's .mtl and textures together with it), or one of the project's models. Dropping .fbx / .obj files on the canvas works too.
- Move, scale, turn and fade it like any layer; ◆ keyframes work. Its own settings: text, font, depth, bevel, colour, metal, rough, light, Rot X / Y / Z (keyframeable) and Spin (degrees per second), its picture size and length.
- The canvas shows it live; for ⚙ **Compile** it is baked into a see-through video automatically (Compile waits if a bake is still due).

## Generate progress

Above the **Generate** button: the running job's step count (hover it for the details). Under it: a progress bar, only while a job runs.

## Projects, queue and gallery


- **When a theme goes wrong** (2.636.0) - **Ctrl+Alt+S** opens Settings from anywhere (even while typing, even when the ⚙ is gone); **Ctrl+Alt+Shift+T** puts the built-in **bitGen Default** theme on (Dark, its own accent and colours, no element styles, UI size 100 %), as does bitGen Default in Settings ▸ Themes or opening the studio with `?theme=default` after its address. The theme you had is kept: Settings ▸ Themes ▸ ↶ The theme before.
- **Assets: Project | Global | All** (2.635.0, the dropdown in the Assets dock's head) - project assets live in `projects\<name>\Assets\`, global assets (every project has them) in `projects\Assets\` (next to your projects; it is not a project itself). New uploads go into the project's Assets folder (the global one while the dock shows Global). **A folder in an Assets folder is a group** - make one in

Explorer or with ; ➜ Send to moves the file into the folder, Add to puts a link there too, ⊖ puts it back, deleting a group moves its files back (nothing is deleted). **Right-click a tile** (or the selection): **Move to Global** / **Move to Project**, New group, Delete. Each asset is also linked into the project's `images\` / `video\` / `sound\` folder (a hard link - no extra disk space), so everything that uses an asset by name keeps working; files that are only there (older projects, renders) show as ungrouped project assets, and the old dock groups became folders.

- **New** / / (the menu bar at the top of the window) — projects. Everything lives in `projects\<name>\` (`output\`, `video\`, `images\`, `sound\`, characters, scenes).
- **Queue** — one job at a time on the GPU; pause, abort (the Abort dialog) and retry; every job keeps its log. **Clear** (in the Queue's header, on both tabs) removes every finished job from the list — done, failed and cancelled; the number on it says how many. Nothing queued or running is touched and no files are deleted.
- **Gallery** — every render; click to preview, drag onto the references, the timeline or a scene.

## Grouping and deleting assets

The Assets dock can sort a project's files into **groups** — folders that live in the dock only. The files themselves never move, so every scene, timeline clip and reference that uses them keeps working.

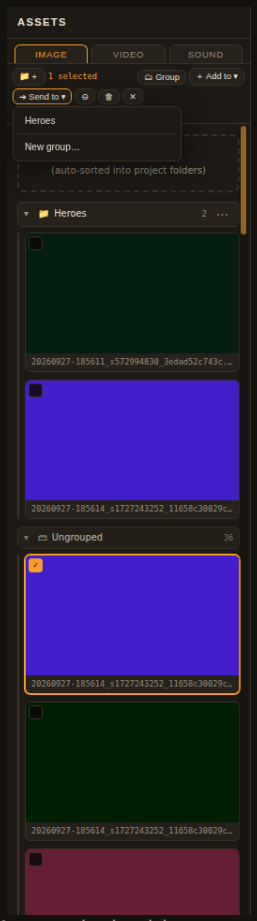


*Assets dock with a group*

- **Select** — tick the box in a tile's corner, Ctrl-click (⌘ on a Mac) or Shift-click for a range. Once something is selected a plain click adds or removes tiles; Ctrl+A selects the whole tab, Esc clears. With nothing selected a click still opens the lightbox.
- makes an empty group. **Group** makes a new group holding the selection.
- **Add to ▾** puts the selection in a group *as well* — an asset can sit in several groups.
- **➜ Send to ▾** *moves* it: out of the group it was picked in, into the new one. You can also drag tiles onto a group's header (hold Ctrl while dropping to add instead).
- ⊖ takes the selection out of the group it was picked in.

- ⋯ on a group header: Rename, Select all, Delete group (its assets stay). Click a header to fold it away.
- One group can hold pictures, videos and sounds — each tab shows that group with its items of that kind.
- (or the Delete key) moves the selection to `projects/<name>/recycle_bin` — never a hard delete. It asks first when *Settings → General → Confirm delete* is on, or when the project still uses one of the files.

Groups are saved per project in `projects/<name>/asset_groups.json`.

## Adding files with the + tiles (2.394.0)

A dashed **+ add** tile opens the file dialog below, so you can add files without dragging them in:


- **References → Video**: **+ add videos**, under the reference videos.
- **References → Sound**: **+ add sounds**, under the reference sounds.
- **Assets → Image / Video / Sound**: **+ add pictures / videos / sounds**, at the top of the list.

Pick several at once, as in Windows 11: **Ctrl-click** adds or removes one file, **Shift-click** picks a range, **Ctrl+A** picks them all. Click **Open** to add them.

Everything you pick goes into the project's Assets. From a References tile, the files also become references, up to the model's limit of three videos and three sounds. Any that don't fit stay in Assets, and the line above the tabs tells you. The tile shows how many places are left, for example **+ add videos (2 free)**, and disappears when the list is full.

You can also focus a tile and press **Enter**, or drop files onto it.

## The file dialog

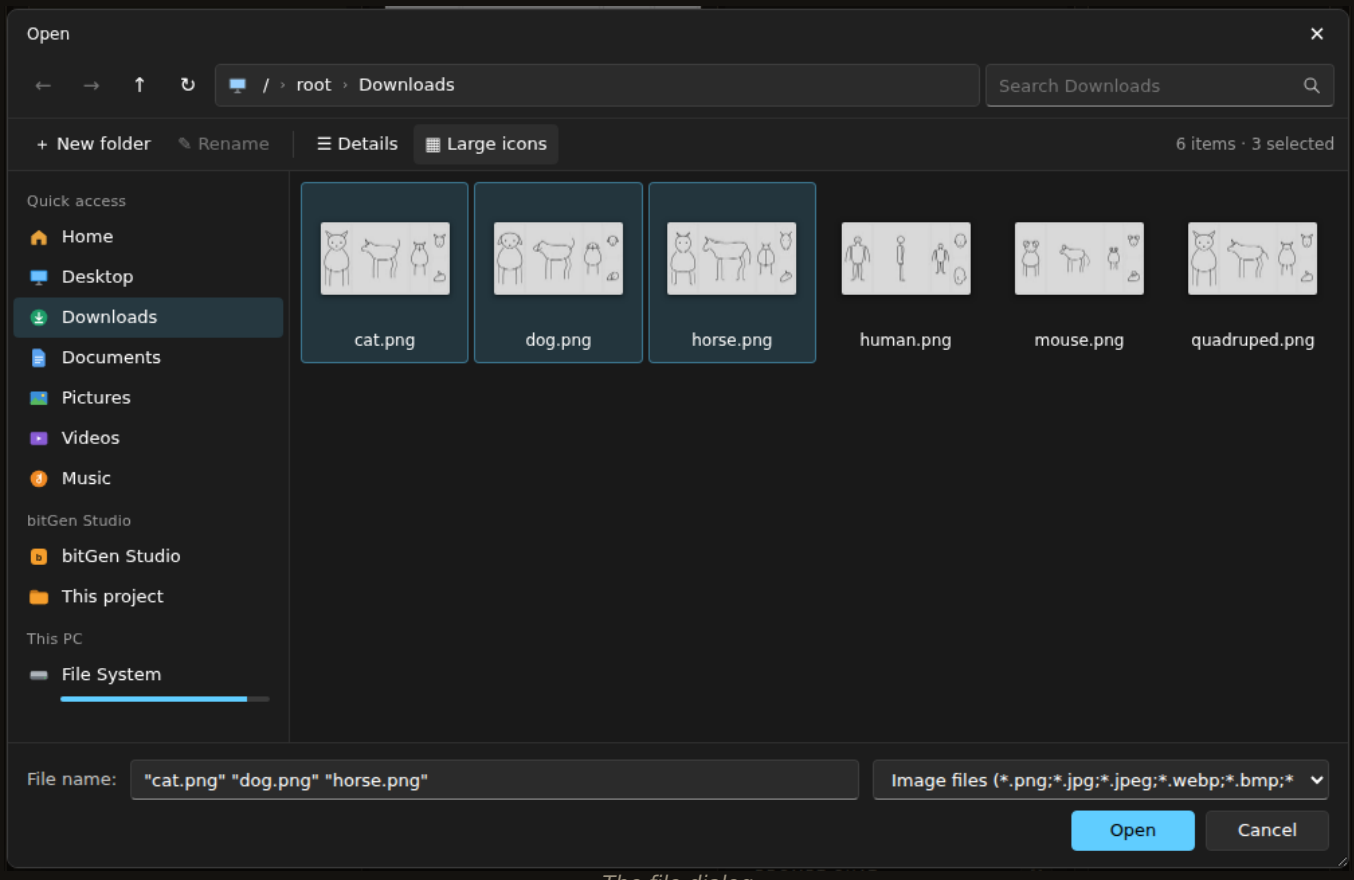


*The file dialog*

Every beside a path and every *Choose file* button opens bitGen Studio's own Open / Select Folder dialog — the same on Windows, macOS and Linux:

- **Navigation pane** — Quick access (your real Desktop, Downloads, Documents, Pictures, Videos, Music), bitGen Studio (the app folder, this project, ComfyUI) and This PC with each drive's free space.
- **Address bar** — click a folder name to jump there, or click the empty part and type a path. ← → ↑ ↻ go back, forward, up and refresh.
- **Search** (top right) — finds names in the folder and all its subfolders; `*` and `?` work as wildcards.
- **Details** / ▦ **Large icons** — sortable Name / Date modified / Type / Size columns, or thumbnails of pictures and videos.
- **New folder** and ✎ **Rename** (F2); right-click for Open, Rename, Copy path, New folder and Refresh.
- **File name** — type a name, a full path, a folder name (to go into it) or a pattern such as `*.png` (to filter); the file-type list sits beside it.
- **Several files** where a button takes several: Ctrl-click and Shift-click.
- Keys: Enter opens, Backspace / Alt+↑ goes up, Alt+← / Alt+→ back / forward, F5 refreshes, typing jumps to a name, Esc cancels.

The dialog reads files from **this** computer, so it only replaces the file pickers in the app window or a browser on the same machine — the phone remote keeps the phone's own picker. **Settings → General → Use bitGen Studio's file dialogs** switches the *Choose file* buttons back to the browser's picker.

## Tips

- **Tags beat descriptions** — `@anna` in a prompt brings Anna's sheet and voice along automatically.
- **Cont** keeps a character across a cut much better than **First** when the frame you start from does not show a face.
- **Free VRAM before every generation** (Settings → ComfyUI) avoids most out-of-memory failures when you mix images, music and video.
- Hover anything — every button has a tooltip. Turn on *Expert mode* in Settings → General to hide the help paragraphs once you know your way around.
- A failed render always says why on its scene card and in the Queue log.

<!-- credits:start -->

## Credits

**Produced and Developed by Tim Paul**

**Programmer - Claude Opus 5.5**

bitGen Studio - a local AI video, image, music and editing studio. Everything runs on your own computer: no sign-ups, no cloud.

bitGen Studio stands on the work of many people. Thank you to everyone below - the projects whose code, models, ideas and tools we use or learned from.

### Generation engines

- **ComfyUI** (Comfy Org and comfyanonymous) - the generation engine - every image, video and music style runs as a ComfyUI graph; its own frontend's graph conversion is mirrored for workflows
- **comfy-kitchen** (Comfy Org) - the int8 ConvRot weight layout, re-implemented in the native engine (Apache-2.0)
- **llama.cpp** (ggml-org) - the local LLM (llama-server) behind Enhance, the prompt chat, screenplays and the vision captioner
- **stable-diffusion.cpp** (leejet) - the first image and video backend (sd-cli)
- **Hugging Face diffusers** (Hugging Face) - the MiniMax H3 weight conversion and modular pipeline the native engine follows (Apache-2.0)

- **Hugging Face Hub** (Hugging Face) - where the model files come from
- **FFmpeg** - compiling, exporting, proxies and every audio / video conversion

### Video models

- **MiniMax H3** (MiniMax) - the main video model - text, references, first / last frame, native audio
- **Viggle-Animate** (Viggle AI) - character animation; its inference code (Apache-2.0) guided the native engine
- **LTX-Video** (Lightricks) - the LTX video styles and the official templates
- **Wan** (the Wan team) - the Wan video styles, camera paths (ATI) and VR worlds
- **SeedVR2** (ByteDance Seed) - upscaling takes
- **FastH3 Omni** - the FastH3 recipe for MiniMax H3 graphs
- **Veda** - the optional sparse-attention accelerator for MiniMax H3
- **MiniMax-H3-NativeAudio-MusicVideo-Workflow** (Shrek3OnVH5) - the music-video lip-sync workflow the MMH3_NativeAudio_MV style is built from (MIT)

### Image models

- **Qwen Image and Qwen Image Edit** (the Qwen team, Alibaba) - picture styles, ✏ Edit, fills and the Sketcher's real photo
- **FLUX.2 and FLUX 3 Klein** (Black Forest Labs) - picture styles, edits and LoRA training bases
- **Krea 2** (Krea) - picture styles (Turbo and Raw)
- **FIBO 2.0** (Bria) - the Fibo 2.0 Edit styles
- **Anima, MOSS-Image, SDXL and Pony models** - more picture styles
- **SAM 2 (Segment Anything)** (Meta) - Select Subject, cut-outs through a shot
- **Hunyuan3D 2.1** (Tencent) - picture to 3D (under its own community licence)
- **TRELLIS.2** (Microsoft) - picture to 3D
- **cadrille** (col14m) - Generate in SolidCraft writes part code from a description or a picture (weights CC BY-NC 4.0)
- **CadQuery** - runs that part code

### Language, speech and music

- **Qwen3, Qwen3.5, Qwen3.8 and Qwen3-VL** (the Qwen team, Alibaba) - the recommended local LLMs, the vision captioner and fine-tune bases
- **Gemma 4** (Google) - local LLMs and fine-tune bases
- **WeVisOne-VL** - the vision add-on
- **faster-whisper** (SYSTRAN) - transcription, karaoke words, edit by transcript, voice chat
- **Whisper** (OpenAI) - the speech-recognition models faster-whisper runs
- **OmniVoice** - text-to-speech and voice cloning
- **OpenAudio / fish-speech** (Fish Audio) - the first text-to-speech engine
- **Ming-3.0 and Bark** - the speech add-ons
- **YuE** - song generation (YuE2), as its own engine and in ComfyUI
- **Demucs** (Meta) - stem separation (vocals / instrumental)

### Training

- **ai-toolkit** (Ostris) - the LoRA and checkpoint trainer
- **Unsloth** - LLM and vision fine-tunes

### ComfyUI node packs

- **ComfyUI-KJNodes** (Kijai) - the MiniMax H3 long-video nodes and many helpers
- **ComfyUI-GGUF** (city96) - GGUF model loading
- **ComfyUI-VideoHelperSuite** (Kosinkadink) - loading and saving video and audio in graphs
- **comfyui-inpaint-nodes** (Acly) - the image editor's selection fill
- **comfyui_controlnet_aux** (Fannovel16) - ControlNet preprocessors
- **ComfyUI-MiniMaxH3Mod, Spectrum-MiniMax-H3, ComfyUI-H3-NativeAudioLock** - character RefMods, MiniMax H3 speed-ups, the song lock for music videos
- **Nougan Nodes, RH DLSS 5, SolarRenderer** - regional character LoRAs and Prompt Relay, ⚡ DLSS 5, ☀ solar rendering

### Built into the app

- **three.js** - every 3D view (MIT)
- **opentype.js** - 3D text (MIT)
- **pdf.js** (Mozilla) - opening PDFs in the image editor (Apache-2.0)
- **pdf-lib and fontkit** - saving PDFs with embedded fonts (MIT)
- **ag-psd** (Agamnentzar) - PSD files and their text effects (MIT)
- **polygon-clipping** - the Sketcher's walls (MIT; with splaytree and robust-predicates)
- **replicad and OpenCascade** - parametric 3D bodies (MIT; OpenCascade LGPL-2.1)
- **jxl-oxide, libjxl and @jsquash/jxl** - JPEG XL open and save (MIT / Apache-2.0 / BSD-3-Clause)
- **Node.js, Express and Multer** - the app's server
- **Electron** - the desktop app
- **Python, NumPy, OpenCV, soundfile and pyaaf2** - the workers, tracking, beats, sound and AAF export
- **OpenTimelineIO** - timeline exchange (OTIO, FCP XML, EDL)
- **uv** (Astral) - the setup's Python
- **ReportLab, pypdf, jsdom and Playwright** - the Guide PDFs and the test suite

### Programs bitGen Studio works with

- **Blender** (the Blender Foundation) - the Blender add-on: scenes and renders both ways, 3D layers, poses
- **Unreal Engine and MetaHuman** (Epic Games) - the bitGen Bridge plugin: Unreal layers, cameras, lights, the live view
- **Daz Studio** (Daz 3D) - the Daz bridge and the live link
- **SolidCraft** (Tangency Labs) - open-source parametric CAD in its own docker
- **Civitai** - model details, examples, search and download
- **RunPod** - rendering on a remote GPU
- **DaVinci Resolve and Final Cut Pro** - timelines out and back in

### Ideas and inspiration

- **Krita AI Diffusion** (Acly) - the image editor's selection Generate / Fill / Remove follows its technique per model family
- **Wan2GP and mmgp** (deepbeepmeep) - the idea of streaming model blocks to the GPU (no code used)
- **The House builder's library** - the furniture, people and materials the Sketcher inherited
- **The professional creative tools** - the photo editors, vector and drawing programs, video editors, motion-graphics tools, 3D modellers and parametric CAD programs whose ways of working the image editor, the timeline, the CAD tools and the Sketcher follow

- **Everyone who tests bitGen Studio** - and reports what to fix

bitGen Studio is MIT licensed. Each project above keeps its own licence - misc/NOTICE.md lists what ships, what is downloaded, and the model licences. Model weights are downloaded by you and carry their makers' terms. <!-- credits:end -->